

---

# AWS SDK for pandas

*Release 3.0.0*

**Amazon Web Services**

Apr 13, 2023



# CONTENTS

<b>1</b>	<b>Read The Docs</b>	<b>3</b>
1.1	What is AWS SDK for pandas? . . . . .	3
1.2	Install . . . . .	3
1.3	At scale . . . . .	10
1.4	Getting Started . . . . .	10
1.5	Supported APIs . . . . .	11
1.6	Caveats . . . . .	12
1.7	To learn more . . . . .	12
1.8	Tutorials . . . . .	12
1.9	API Reference . . . . .	153
<b>Index</b>		<b>413</b>



An AWS Professional Service open source initiative | [aws-proserve-opensource@amazon.com](mailto:aws-proserve-opensource@amazon.com)

AWS Data Wrangler is now **AWS SDK for pandas (awswrangler)**. We're changing the name we use when we talk about the library, but everything else will stay the same. You'll still be able to install using `pip install awswrangler` and you won't need to change any of your code. As part of this change, we've moved the library from AWS Labs to the main AWS GitHub organisation but, thanks to the GitHub's redirect feature, you'll still be able to access the project by its old URLs until you update your bookmarks. Our documentation has also moved to [aws-sdk-pandas.readthedocs.io](https://aws-sdk-pandas.readthedocs.io), but old bookmarks will redirect to the new site.

```
>>> pip install awswrangler
```

```
>>> # Optional modules are installed with:  
>>> pip install 'awswrangler[redshift]'
```

```
import awswrangler as wr  
import pandas as pd  
from datetime import datetime  
  
df = pd.DataFrame({"id": [1, 2], "value": ["foo", "boo"]})  
  
# Storing data on Data Lake  
wr.s3.to_parquet(  
    df=df,  
    path="s3://bucket/dataset/",  
    dataset=True,  
    database="my_db",  
    table="my_table"  
)  
  
# Retrieving the data directly from Amazon S3  
df = wr.s3.read_parquet("s3://bucket/dataset/", dataset=True)  
  
# Retrieving the data from Amazon Athena  
df = wr.athena.read_sql_query("SELECT * FROM my_table", database="my_db")  
  
# Get a Redshift connection from Glue Catalog and retrieving data from Redshift Spectrum  
con = wr.redshift.connect("my-glue-connection")  
df = wr.redshift.read_sql_query("SELECT * FROM external_schema.my_table", con=con)  
con.close()  
  
# Amazon Timestream Write  
df = pd.DataFrame({  
    "time": [datetime.now(), datetime.now()],  
    "my_dimension": ["foo", "boo"],  
    "measure": [1.0, 1.1],  
})  
rejected_records = wr.timestream.write(df,  
    database="sampleDB",  
    table="sampleTable",  
    time_col="time",  
    measure_col="measure",  
    dimensions_cols=["my_dimension"],  
)
```

(continues on next page)

(continued from previous page)

```
# Amazon Timestream Query
wr.timestream.query("""
SELECT time, measure_value::double, my_dimension
FROM "sampleDB"."sampleTable" ORDER BY time DESC LIMIT 3
""")
```

## READ THE DOCS

### 1.1 What is AWS SDK for pandas?

An AWS Professional Service open source python initiative that extends the power of the `pandas` library to AWS, connecting **DataFrames** and AWS data & analytics services.

Easy integration with Athena, Glue, Redshift, Timestream, OpenSearch, Neptune, QuickSight, Chime, CloudWatchLogs, DynamoDB, EMR, SecretManager, PostgreSQL, MySQL, SQLServer and S3 (Parquet, CSV, JSON and EXCEL).

Built on top of other open-source projects like Pandas, Apache Arrow and Boto3, it offers abstracted functions to execute your usual ETL tasks like load/unloading data from **Data Lakes**, **Data Warehouses** and **Databases**, even [at scale](#).

Check our [tutorials](#) or the [list of functionalities](#).

### 1.2 Install

**AWS SDK for pandas** runs on Python 3.8, 3.9 and 3.10, and on several platforms (AWS Lambda, AWS Glue Python Shell, EMR, EC2, on-premises, Amazon SageMaker, local, etc).

Some good practices to follow for options below are:

- Use new and isolated Virtual Environments for each project ([venv](#)).
- On Notebooks, always restart your kernel after installations.

#### 1.2.1 PyPI (pip)

```
>>> pip install awswrangler
```

```
>>> # Optional modules are installed with:  
>>> pip install 'awswrangler[redshift]'
```

## 1.2.2 Conda

```
>>> conda install -c conda-forge awswrangler
```

## 1.2.3 At scale

AWS SDK for pandas can also run your workflows at scale by leveraging `modin` and `ray`.

```
>>> pip install "awswrangler[modin,ray]==3.0.0"
```

As a result existing scripts can run on significantly larger datasets with no code rewrite.

## 1.2.4 Optional dependencies

Starting version 3.0, some `awswrangler` modules are optional and must be installed explicitly using:

```
>>> pip install 'awswrangler[optional-module1, optional-module2]'
```

The optional modules are: - redshift - mysql - postgres - sqlserver - oracle - gremlin - sparql - opencypher - openpyxl - opensearch - deltalake

Calling these modules without the required dependencies raises an error prompting you to install the missing package.

## 1.2.5 AWS Lambda Layer

### Managed Layer

---


**Note:** There is a one week minimum delay between version release and layers being available in the AWS Lambda console.

---

**Warning:** Lambda Functions using the layer with a memory size of less than 512MB may be insufficient for some workloads.

AWS SDK for pandas is available as an AWS Lambda Managed layer in all AWS commercial regions.

It can be accessed in the AWS Lambda console directly:

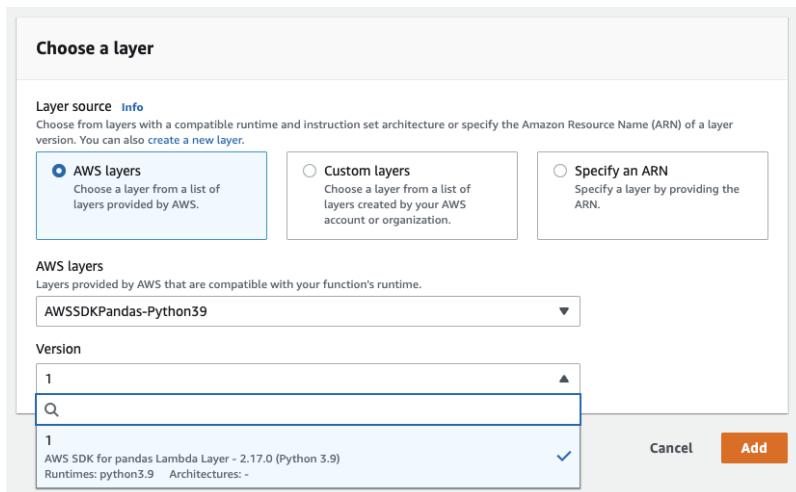

Or via its ARN: `arn:aws:lambda:<region>:336392948345:layer:AWSSDKPandas-Python<python-version>:<layer-version>`.

For example: `arn:aws:lambda:us-east-1:336392948345:layer:AWSSDKPandas-Python38:1`.

The full list of ARNs is available [here](#).

## Custom Layer

You can also create your own Lambda layer with these instructions:

- 1 - Go to [GitHub's release section](#) and download the zipped layer for to the desired version. Alternatively, you can download the zip from the [public artifacts bucket](#).
- 2 - Go to the AWS Lambda console, open the layer section (left side) and click **create layer**.
- 3 - Set name and python version, upload your downloaded zip file and press **create**.
- 4 - Go to your Lambda function and select your new layer!

## Serverless Application Repository (SAR)

AWS SDK for pandas layers are also available in the [AWS Serverless Application Repository \(SAR\)](#).

The app deploys the Lambda layer version in your own AWS account and region via a CloudFormation stack. This option provides the ability to use semantic versions (i.e. library version) instead of Lambda layer versions.

Table 1: AWS SDK for pandas Layer Apps

App	ARN	Description
aws-sdk-pandas-layer-py3-8	arn:aws:serverlessrepo:us-east-1:336392948345:application/sdk-pandas-layer-py3-8	Layer for Python 3.8.x runtimes
aws-sdk-pandas-layer-py3-9	arn:aws:serverlessrepo:us-east-1:336392948345:application/sdk-pandas-layer-py3-9	Layer for Python 3.9.x runtimes

Here is an example of how to create and use the AWS SDK for pandas Lambda layer in your CDK app:

```
from aws_cdk import core, aws_sam as sam, aws_lambda

class AWSSDKPandasApp(core.Construct):
    def __init__(self, scope: core.Construct, id_: str):
        super().__init__(scope, id)

        aws_sdk_pandas_layer = sam.CfnApplication(
            self,
            "awssdkpandas-layer",
            location=sam.CfnApplication.ApplicationLocationProperty(
                application_id="arn:aws:serverlessrepo:us-east-1:336392948345:applications/aws-
                sdk-pandas-layer-py3-8",
                semantic_version="2.20.0", # Get the latest version from https://serverlessrepo.
                aws.amazon.com/applications
            ),
        )

        aws_sdk_pandas_layer_arn = aws_sdk_pandas_layer.get_att("Outputs.WranglerLayer38Arn
        ").to_string()
        aws_sdk_pandas_layer_version = aws_lambda.LayerVersion.from_layer_version_arn(self,
        "awssdkpandas-layer-version", aws_sdk_pandas_layer_arn)

        aws_lambda.Function(
            self,
            "awssdkpandas-function",
            runtime=aws_lambda.Runtime.PYTHON_3_8,
            function_name="sample-awssdk-pandas-lambda-function",
            code=aws_lambda.Code.from_asset("./src/awssdk-pandas-lambda"),
            handler='lambda_function.lambda_handler',
            layers=[aws_sdk_pandas_layer_version]
        )
```

## 1.2.6 AWS Glue Python Shell Jobs

---

**Note:** Glue Python Shell Python3.9 has version 2.15.1 of awswrangler baked in. If you need a different version, follow instructions below:

---

1 - Go to [GitHub's release page](#) and download the wheel file (.whl) related to the desired version. Alternatively, you can download the wheel from the [public artifacts bucket](#).

2 - Upload the wheel file to the Amazon S3 location of your choice.

3 - Go to your Glue Python Shell job and point to the S3 wheel file in the *Python library path* field.

[Official Glue Python Shell Reference](#)

## 1.2.7 AWS Glue for Ray Jobs

Go to your Glue for Ray job and create a new *Job parameters* key/value:

- Key: `--pip-install`
- Value: `awswrangler[modin]`

[Official Glue for Ray Reference](#)

## 1.2.8 AWS Glue PySpark Jobs

---

**Note:** AWS SDK for pandas has compiled dependencies (C/C++) so support is only available for Glue PySpark Jobs >= 2.0.

---

Go to your Glue PySpark job and create a new *Job parameters* key/value:

- Key: `--additional-python-modules`
- Value: `pyarrow==7,awswrangler`

To install a specific version, set the value for the above Job parameter as follows:

- Value: `pyarrow==7,pandas==1.5.3,awswrangler==3.0.0`

[Official Glue PySpark Reference](#)

## 1.2.9 Public Artifacts

Lambda zipped layers and Python wheels are stored in a publicly accessible S3 bucket for all versions.

- Bucket: `aws-data-wrangler-public-artifacts`
- Prefix: `releases/<version>/`
  - Lambda layer: `awswrangler-layer-<version>-py<py-version>.zip`
  - Python wheel: `awswrangler-<version>-py3-none-any.whl`

For example: `s3://aws-data-wrangler-public-artifacts/releases/3.0.0/awswrangler-layer-3.0.0-py3.8.zip`

## 1.2.10 Amazon SageMaker Notebook

Run this command in any Python 3 notebook cell and then make sure to **restart the kernel** before importing the `awswrangler` package.

```
>>> !pip install awswrangler
```

### 1.2.11 Amazon SageMaker Notebook Lifecycle

Open the AWS SageMaker console, go to the lifecycle section and use the below snippet to configure AWS SDK for pandas for all compatible SageMaker kernels ([Reference](#)).

```
#!/bin/bash

set -e

# OVERVIEW
# This script installs a single pip package in all SageMaker conda environments, apart
# from the JupyterSystemEnv which
# is a system environment reserved for Jupyter.
# Note this may timeout if the package installations in all environments take longer
# than 5 mins, consider using
# "nohup" to run this as a background process in that case.

sudo -u ec2-user -i <<'EOF'

# PARAMETERS
PACKAGE=awswrangler

# Note that "base" is special environment name, include it there as well.
for env in base /home/ec2-user/anaconda3/envs/*; do
    source /home/ec2-user/anaconda3/bin/activate $(basename "$env")
    if [ $env = 'JupyterSystemEnv' ]; then
        continue
    fi
    nohup pip install --upgrade "$PACKAGE" &
    source /home/ec2-user/anaconda3/bin/deactivate
done
EOF
```

### 1.2.12 EMR Cluster

Despite not being a distributed library, AWS SDK for pandas could be used to complement Big Data pipelines.

- Configure Python 3 as the default interpreter for PySpark on your cluster configuration [ONLY REQUIRED FOR EMR < 6]

```
[{
  {
    "Classification": "spark-env",
    "Configurations": [
      {
        "Classification": "export",
        "Properties": {
          "PYSPARK_PYTHON": "/usr/bin/python3"
        }
      }
    ]
  }
}]
```

- Keep the bootstrap script above on S3 and reference it on your cluster.

- For EMR Release < 6

```
#!/usr/bin/env bash
set -ex

sudo pip-3.6 install pyarrow==2 awswrangler
```

- For EMR Release >= 6

```
#!/usr/bin/env bash
set -ex

sudo pip install awswrangler
```

### 1.2.13 From Source

```
>>> git clone https://github.com/aws/aws-sdk-pandas.git
>>> cd aws-sdk-pandas
>>> pip install .
```

### 1.2.14 Notes for Microsoft SQL Server

awswrangler uses `pyodbc` for interacting with Microsoft SQL Server. To install this package you need the ODBC header files, which can be installed, with the following commands:

```
>>> sudo apt install unixodbc-dev
>>> yum install unixODBC-devel
```

After installing these header files you can either just install `pyodbc` or `awswrangler` with the `sqlserver` extra, which will also install `pyodbc`:

```
>>> pip install pyodbc
>>> pip install 'awswrangler[sqlserver]'
```

Finally you also need the correct ODBC Driver for SQL Server. You can have a look at the documentation from [Microsoft](#) to see how they can be installed in your environment.

If you want to connect to Microsoft SQL Server from AWS Lambda, you can build a separate Layer including the needed ODBC drivers and `pyodbc`.

If you maintain your own environment, you need to take care of the above steps. Because of this limitation usage in combination with Glue jobs is limited and you need to rely on the provided functionality inside Glue itself.

## 1.2.15 Notes for Oracle Database

`awswrangler` is using the `oracledb` for interacting with Oracle Database. For installing this package you do not need the Oracle Client libraries unless you want to use the Thick mode. You can have a look at the [documentation from Oracle](#) to see how they can be installed in your environment.

After installing these client libraries you can either just install `oracledb` or `awswrangler` with the `oracle` extra, which will also install `oracledb`:

```
>>> pip install oracledb
>>> pip install 'awswrangler[oracle]'
```

If you maintain your own environment, you need to take care of the above steps. Because of this limitation usage in combination with Glue jobs is limited and you need to rely on the provided [functionality inside Glue itself](#).

## 1.3 At scale

AWS SDK for pandas supports [Ray](#) and [Modin](#), enabling you to scale your pandas workflows from a single machine to a multi-node environment, with no code changes.

The simplest way to try this is with [AWS Glue for Ray](#), the new serverless option to run distributed Python code announced at AWS re:Invent 2022. AWS SDK for pandas also supports self-managed Ray on [Amazon Elastic Compute Cloud \(Amazon EC2\)](#).

## 1.4 Getting Started

Install the library with the these two optional dependencies to enable distributed mode:

```
>>> pip install "awswrangler[ray,modin]"
```

Once installed, you can use the library in your code as usual:

```
>>> import awswrangler as wr
```

At import, SDK for pandas looks for an environmental variable called `WR_ADDRESS`. If found, it is used to send commands to a remote cluster. If not found, a local Ray runtime is initialized on your machine instead.

To confirm that you are in distributed mode, run:

```
>>> print(f"Execution Engine: {wr.engine.get()}")
>>> print(f"Memory Format: {wr.memory_format.get()}")
```

which show that both Ray and Modin are enabled as an execution engine and memory format, respectively.

In distributed mode, the same `awswrangler` APIs can now handle much larger datasets:

```
# Read Parquet data (1.2 Gb Parquet compressed)
df = wr.s3.read_parquet(
    path=f"s3://amazon-reviews-pds/parquet/product_category={category.title()}/",
)

# Drop the customer_id column
df.drop("customer_id", axis=1, inplace=True)
```

(continues on next page)

(continued from previous page)

```
# Filter reviews with 5-star rating
df5 = df[df["star_rating"] == 5]
```

In the example above, Amazon product data is read from Amazon S3 into a distributed [Modin data frame](#). Modin is a drop-in replacement for Pandas. It exposes the same APIs but enables you to use all of the cores on your machine, or all of the workers in an entire cluster, leading to improved performance and scale. To use it, make sure to replace your pandas import statement with modin:

```
>>> import modin.pandas as pd # instead of import pandas as pd
```

Failing to do so means that all operations run on a single thread instead of leveraging the entire cluster resources.

Note that in distributed mode, all `awswrangler` APIs return and accept Modin data frames, not pandas.

## 1.5 Supported APIs

This table lists the `awswrangler` APIs available in distributed mode (i.e. that can run at scale):

Service	API	Implementation
S3	read_parquet	
	read_parquet_metadata	
	read_parquet_table	
	read_csv	
	read_json	
	read_fwf	
	to_parquet	
	to_csv	
	to_json	
	select_query	
	store_parquet_metadata	
	delete_objects	
	describe_objects	
	size_objects	
	wait_objects_exist	
	wait_objects_not_exist	
	merge_datasets	
	copy_objects	
Redshift	copy	
	unload	
Athena	read_sql_query	
	read_sql_table	
	describe_table	
	get_query_results	
	show_create_table	
DynamoDB	read_items	
	put_df	
	put_csv	
	put_json	
	put_items	

continues on next page

Table 2 – continued from previous page

Service	API	Implementation
Lake Formation	read_sql_query	
	read_sql_table	
Timestream	write	

## 1.6 Caveats

### 1.6.1 S3FS Filesystem

When Ray is chosen as an engine, S3Fs is used instead of boto3 for certain API calls. These include listing a large number of S3 objects for example. This choice was made for performance reasons as a boto3 implementation can be much slower in some cases. As a side effect, users won't be able to use the `s3_additional_kwargs` input parameter as it's currently not supported by S3Fs.

### 1.6.2 Unsupported kwargs

Most AWS SDK for pandas calls support passing the `boto3_session` argument. While this is acceptable for an application running in a single process, distributed applications require the session to be serialized and passed to the worker nodes in the cluster. This constitutes a security risk. As a result, passing `boto3_session` when using the Ray runtime is not supported.

## 1.7 To learn more

Read our [blog post](#), then head to our latest [tutorials](#) to discover even more features.


A runbook with common errors when running the library with Ray is available [here](#).

## 1.8 Tutorials

---

**Note:** You can also find all Tutorial Notebooks on [GitHub](#).

---



AWS SDK for pandas

## 1.8.1 1 - Introduction

### What is AWS SDK for pandas?

An open-source Python package that extends the power of Pandas library to AWS connecting **DataFrames** and AWS data related services (**Amazon Redshift**, **AWS Glue**, **Amazon Athena**, **Amazon Timestream**, **Amazon EMR**, etc).

Built on top of other open-source projects like Pandas, Apache Arrow and Boto3, it offers abstracted functions to execute usual ETL tasks like load/unload data from **Data Lakes**, **Data Warehouses** and **Databases**.

Check our [list of functionalities](#).

### How to install?

awswrangler runs almost anywhere over Python 3.8, 3.9 and 3.10, so there are several different ways to install it in the desired environment.

- PyPi (pip)
- Conda
- AWS Lambda Layer
- AWS Glue Python Shell Jobs
- AWS Glue PySpark Jobs
- Amazon SageMaker Notebook
- Amazon SageMaker Notebook Lifecycle
- EMR Cluster
- From source


Some good practices for most of the above methods are: - Use new and individual Virtual Environments for each project ([venv](#)) - On Notebooks, always restart your kernel after installations.

### Let's Install it!

```
[ ]: !pip install awswrangler
```

Restart your kernel after the installation!

```
[1]: import awswrangler as wr
wr.__version__
[1]: '2.0.0'
```



AWS SDK for pandas

## 1.8.2 2 - Sessions

### How awswrangler handles Sessions and AWS credentials?

After version 1.0.0 awswrangler relies on `Boto3.Session()` to manage AWS credentials and configurations.

awswrangler will not store any kind of state internally. Users are in charge of managing Sessions.

Most awswrangler functions receive the optional `boto3_session` argument. If `None` is received, the default `boto3` Session will be used.

```
[1]: import awswrangler as wr
import boto3
```

### Using the default Boto3 Session


```
[2]: wr.s3.does_object_exist("s3://noaa-ghcn-pds/fake")
[2]: False
```

### Customizing and using the default Boto3 Session

```
[3]: boto3.setup_default_session(region_name="us-east-2")
wr.s3.does_object_exist("s3://noaa-ghcn-pds/fake")
[3]: False
```

### Using a new custom Boto3 Session

```
[4]: my_session = boto3.Session(region_name="us-east-2")
wr.s3.does_object_exist("s3://noaa-ghcn-pds/fake", boto3_session=my_session)
[4]: False
```



AWS SDK for pandas

### 1.8.3 3 - Amazon S3

#### Table of Contents

- 1. *CSV files*
  - 1.1 *Writing CSV files*
  - 1.2 *Reading single CSV file*
  - 1.3 *Reading multiple CSV files*
    - \* 1.3.1 *Reading CSV by list*
    - \* 1.3.2 *Reading CSV by prefix*
- 2. *JSON files*
  - 2.1 *Writing JSON files*
  - 2.2 *Reading single JSON file*
  - 2.3 *Reading multiple JSON files*
    - \* 2.3.1 *Reading JSON by list*
    - \* 2.3.2 *Reading JSON by prefix*
- 3. *Parquet files*
  - 3.1 *Writing Parquet files*
  - 3.2 *Reading single Parquet file*
  - 3.3 *Reading multiple Parquet files*
    - \* 3.3.1 *Reading Parquet by list*
    - \* 3.3.2 *Reading Parquet by prefix*
- 4. *Fixed-width formatted files (only read)*
  - 4.1 *Reading single FWF file*
  - 4.2 *Reading multiple FWF files*
    - \* 4.2.1 *Reading FWF by list*
    - \* 4.2.2 *Reading FWF by prefix*
- 5. *Excel files*

- *5.1 Writing Excel file*
- *5.2 Reading Excel file*
- *6. Reading with lastModified filter*
  - *6.1 Define the Date time with UTC Timezone*
  - *6.2 Define the Date time and specify the Timezone*
  - *6.3 Read json using the LastModified filters*
- *7. Download Objects*
  - *7.1 Download object to a file path*
  - *7.2 Download object to a file-like object in binary mode*
- *8. Upload Objects*
  - *8.1 Upload object from a file path*
  - *8.2 Upload object from a file-like object in binary mode*
- *9. Delete objects*

```
[1]: import awswrangler as wr
import pandas as pd
import boto3
import pytz
from datetime import datetime

df1 = pd.DataFrame({
    "id": [1, 2],
    "name": ["foo", "boo"]
})

df2 = pd.DataFrame({
    "id": [3],
    "name": ["bar"]
})
```

Enter your bucket name:

```
[2]: import getpass
bucket = getpass.getpass()
```

## 1. CSV files

### 1.1 Writing CSV files

```
[3]: path1 = f"s3://{bucket}/csv/file1.csv"
path2 = f"s3://{bucket}/csv/file2.csv"

wr.s3.to_csv(df1, path1, index=False)
wr.s3.to_csv(df2, path2, index=False)
```

## 1.2 Reading single CSV file

```
[4]: wr.s3.read_csv([path1])
```

```
[4]:
```

	id	name
0	1	foo
1	2	boo

## 1.3 Reading multiple CSV files

### 1.3.1 Reading CSV by list

```
[5]: wr.s3.read_csv([path1, path2])
```

```
[5]:
```

	id	name
0	1	foo
1	2	boo
2	3	bar

### 1.3.2 Reading CSV by prefix

```
[6]: wr.s3.read_csv(f"s3://{bucket}/csv/")
```

```
[6]:
```

	id	name
0	1	foo
1	2	boo
2	3	bar

## 2. JSON files

### 2.1 Writing JSON files

```
[7]: path1 = f"s3://{bucket}/json/file1.json"
path2 = f"s3://{bucket}/json/file2.json"
```

```
wr.s3.to_json(df1, path1)
wr.s3.to_json(df2, path2)
```

```
[7]: ['s3://woodadw-test/json/file2.json']
```

## 2.2 Reading single JSON file

```
[8]: wr.s3.read_json([path1])
```

```
[8]:
```

	id	name
0	1	foo
1	2	boo

## 2.3 Reading multiple JSON files

### 2.3.1 Reading JSON by list

```
[9]: wr.s3.read_json([path1, path2])
```

```
[9]:
```

	id	name
0	1	foo
1	2	boo
0	3	bar

### 2.3.2 Reading JSON by prefix

```
[10]: wr.s3.read_json(f"s3://{bucket}/json/")
```

```
[10]:
```

	id	name
0	1	foo
1	2	boo
0	3	bar

## 3. Parquet files

For more complex features related to Parquet Dataset check the tutorial number 4.

### 3.1 Writing Parquet files

```
[11]: path1 = f"s3://'{bucket}'/parquet/file1.parquet"
path2 = f"s3://'{bucket}'/parquet/file2.parquet"

wr.s3.to_parquet(df1, path1)
wr.s3.to_parquet(df2, path2)
```

### 3.2 Reading single Parquet file

```
[12]: wr.s3.read_parquet([path1])
```

```
[12]:   id name
  0   1   foo
  1   2   boo
```

### 3.3 Reading multiple Parquet files

#### 3.3.1 Reading Parquet by list

```
[13]: wr.s3.read_parquet([path1, path2])
```

```
[13]:   id name
  0   1   foo
  1   2   boo
  2   3   bar
```

#### 3.3.2 Reading Parquet by prefix

```
[14]: wr.s3.read_parquet(f"s3://{bucket}/parquet/")
```

```
[14]:   id name
  0   1   foo
  1   2   boo
  2   3   bar
```

### 4. Fixed-width formatted files (only read)

As of today, Pandas doesn't implement a `to_fwf` functionality, so let's manually write two files:

```
[15]: content = "1  Herfelingen 27-12-18\n"\
        "2  Lambusart 14-06-18\n"\
        "3 Spormaggiore 15-04-18"
boto3.client("s3").put_object(Body=content, Bucket=bucket, Key="fwf/file1.txt")

content = "4  Buizingen 05-09-19\n"\
        "5  San Rafael 04-09-19"
boto3.client("s3").put_object(Body=content, Bucket=bucket, Key="fwf/file2.txt")

path1 = f"s3://{bucket}/fwf/file1.txt"
path2 = f"s3://{bucket}/fwf/file2.txt"
```

## 4.1 Reading single FWF file

```
[16]: wr.s3.read_fwf([path1], names=["id", "name", "date"])
```

```
[16]:
```

	id	name	date
0	1	Herfelingen	27-12-18
1	2	Lambusart	14-06-18
2	3	Spormaggiore	15-04-18

## 4.2 Reading multiple FWF files

### 4.2.1 Reading FWF by list

```
[17]: wr.s3.read_fwf([path1, path2], names=["id", "name", "date"])
```

```
[17]:
```

	id	name	date
0	1	Herfelingen	27-12-18
1	2	Lambusart	14-06-18
2	3	Spormaggiore	15-04-18
3	4	Buizingen	05-09-19
4	5	San Rafael	04-09-19

### 4.2.2 Reading FWF by prefix

```
[18]: wr.s3.read_fwf(f"s3://{bucket}/fwf/", names=["id", "name", "date"])
```

```
[18]:
```

	id	name	date
0	1	Herfelingen	27-12-18
1	2	Lambusart	14-06-18
2	3	Spormaggiore	15-04-18
3	4	Buizingen	05-09-19
4	5	San Rafael	04-09-19

## 5. Excel files

### 5.1 Writing Excel file

```
[19]: path = f"s3://{bucket}/file0.xlsx"  
  
wr.s3.to_excel(df1, path, index=False)  
  
[19]: 's3://woodadw-test/file0.xlsx'
```

## 5.2 Reading Excel file

```
[20]: wr.s3.read_excel(path)
```

```
[20]:
```

	id	name
0	1	foo
1	2	boo

## 6. Reading with lastModified filter

Specify the filter by LastModified Date.

The filter needs to be specified as datetime with time zone

Internally the path needs to be listed, after that the filter is applied.

The filter compare the s3 content with the variables lastModified\_begin and lastModified\_end

<https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/s3.html>

### 6.1 Define the Date time with UTC Timezone

```
[21]: begin = datetime.strptime("20-07-31 20:30", "%y-%m-%d %H:%M")
end = datetime.strptime("21-07-31 20:30", "%y-%m-%d %H:%M")

begin_utc = pytz.utc.localize(begin)
end_utc = pytz.utc.localize(end)
```

### 6.2 Define the Date time and specify the Timezone

```
[22]: begin = datetime.strptime("20-07-31 20:30", "%y-%m-%d %H:%M")
end = datetime.strptime("21-07-31 20:30", "%y-%m-%d %H:%M")

timezone = pytz.timezone("America/Los_Angeles")

begin_Los_Angeles = timezone.localize(begin)
end_Los_Angeles = timezone.localize(end)
```

### 6.3 Read json using the LastModified filters

```
[23]: wr.s3.read_fwf(f"s3://{bucket}/fwf/", names=["id", "name", "date"], last_modified_
    ↪begin=begin_utc, last_modified_end=end_utc)
wr.s3.read_json(f"s3://{bucket}/json/", last_modified_begin=begin_utc, last_modified_
    ↪end=end_utc)
wr.s3.read_csv(f"s3://{bucket}/csv/", last_modified_begin=begin_utc, last_modified_
    ↪end=end_utc)
wr.s3.read_parquet(f"s3://{bucket}/parquet/", last_modified_begin=begin_utc, last_
    ↪modified_end=end_utc)
```

## 7. Download objects

Objects can be downloaded from S3 using either a path to a local file or a file-like object in binary mode.

### 7.1 Download object to a file path

```
[24]: local_file_dir = getpass.getpass()
```

```
[25]: import os
```

```
path1 = f"s3://{bucket}/csv/file1.csv"
local_file = os.path.join(local_file_dir, "file1.csv")
wr.s3.download(path=path1, local_file=local_file)

pd.read_csv(local_file)
```

```
[25]:
```

```
   id name
0   1   foo
1   2   boo
```

### 7.2 Download object to a file-like object in binary mode

```
[26]: path2 = f"s3://{bucket}/csv/file2.csv"
local_file = os.path.join(local_file_dir, "file2.csv")
with open(local_file, mode="wb") as local_f:
    wr.s3.download(path=path2, local_file=local_f)

pd.read_csv(local_file)
```

```
[26]:
```

```
   id name
0   3   bar
```

## 8. Upload objects

Objects can be uploaded to S3 using either a path to a local file or a file-like object in binary mode.

### 8.1 Upload object from a file path

```
[27]: local_file = os.path.join(local_file_dir, "file1.csv")
wr.s3.upload(local_file=local_file, path=path1)
```

```
wr.s3.read_csv(path1)
```

```
[27]:
```

```
   id name
0   1   foo
1   2   boo
```


## 8.2 Upload object from a file-like object in binary mode

```
[28]: local_file = os.path.join(local_file_dir, "file2.csv")
with open(local_file, "rb") as local_f:
    wr.s3.upload(local_file=local_f, path=path2)

wr.s3.read_csv(path2)
[28]:   id name
 0   3   bar
```

## 9. Delete objects

```
[29]: wr.s3.delete_objects(f"s3://[{bucket}]/")
```



AWS SDK for pandas

### 1.8.4 4 - Parquet Datasets

awswrangler has 3 different write modes to store Parquet Datasets on Amazon S3.

- **append** (Default)

Only adds new files without any delete.

- **overwrite**

Deletes everything in the target directory and then add new files. If writing new files fails for any reason, old files are *not* restored.

- **overwrite\_partitions** (Partition Upsert)

Only deletes the paths of partitions that should be updated and then writes the new partitions files. It's like a “partition Upsert”.

```
[1]: from datetime import date
import awswrangler as wr
import pandas as pd
```

Enter your bucket name:

```
[2]: import getpass  
bucket = getpass.getpass()  
path = f"s3://{{bucket}}/dataset/"  
.....
```

## Creating the Dataset

```
[3]: df = pd.DataFrame({  
    "id": [1, 2],  
    "value": ["foo", "boo"],  
    "date": [date(2020, 1, 1), date(2020, 1, 2)]  
})  
  
wr.s3.to_parquet(  
    df=df,  
    path=path,  
    dataset=True,  
    mode="overwrite"  
)  
  
wr.s3.read_parquet(path, dataset=True)  
[3]:   id  value        date  
0    1    foo  2020-01-01  
1    2    boo  2020-01-02
```

## Appending

```
[4]: df = pd.DataFrame({  
    "id": [3],  
    "value": ["bar"],  
    "date": [date(2020, 1, 3)]  
})  
  
wr.s3.to_parquet(  
    df=df,  
    path=path,  
    dataset=True,  
    mode="append"  
)  
  
wr.s3.read_parquet(path, dataset=True)  
[4]:   id  value        date  
0    3    bar  2020-01-03  
1    1    foo  2020-01-01  
2    2    boo  2020-01-02
```

## Overwriting

```
[5]: wr.s3.to_parquet(
    df=df,
    path=path,
    dataset=True,
    mode="overwrite"
)

wr.s3.read_parquet(path, dataset=True)
```

[5]:	id value date
	0 3 bar 2020-01-03

## Creating a Partitioned Dataset

```
[6]: df = pd.DataFrame({
    "id": [1, 2],
    "value": ["foo", "boo"],
    "date": [date(2020, 1, 1), date(2020, 1, 2)]
})

wr.s3.to_parquet(
    df=df,
    path=path,
    dataset=True,
    mode="overwrite",
    partition_cols=["date"]
)

wr.s3.read_parquet(path, dataset=True)
```

[6]:	id value date
	0 1 foo 2020-01-01
	1 2 boo 2020-01-02

## Upserting partitions (overwrite\_partitions)

```
[7]: df = pd.DataFrame({
    "id": [2, 3],
    "value": ["xoo", "bar"],
    "date": [date(2020, 1, 2), date(2020, 1, 3)]
})

wr.s3.to_parquet(
    df=df,
    path=path,
    dataset=True,
    mode="overwrite_partitions",
    partition_cols=["date"]
)
```

(continues on next page)

(continued from previous page)


```
wr.s3.read_parquet(path, dataset=True)
```

```
[7]:   id value      date
  0   1   foo  2020-01-01
  1   2   xoo  2020-01-02
  2   3   bar  2020-01-03
```

## BONUS - Glue/Athena integration

```
[8]: df = pd.DataFrame({
    "id": [1, 2],
    "value": ["foo", "boo"],
    "date": [date(2020, 1, 1), date(2020, 1, 2)]})
wr.s3.to_parquet(
    df=df,
    path=path,
    dataset=True,
    mode="overwrite",
    database="aws_sdk_pandas",
    table="my_table")
wr.athena.read_sql_query("SELECT * FROM my_table", database="aws_sdk_pandas")
```

```
[8]:   id value      date
  0   1   foo  2020-01-01
  1   2   boo  2020-01-02
```



AWS SDK for pandas

## 1.8.5 5 - Glue Catalog

awswrangler makes heavy use of Glue Catalog to store metadata of tables and connections.

```
[1]: import awswrangler as wr
import pandas as pd
```

Enter your bucket name:

```
[2]: import getpass
bucket = getpass.getpass()
path = f"s3://{bucket}/data/"

.....
```

## Creating a Pandas DataFrame

```
[3]: df = pd.DataFrame({
    "id": [1, 2, 3],
    "name": ["shoes", "tshirt", "ball"],
    "price": [50.3, 10.5, 20.0],
    "in_stock": [True, True, False]
})
df
```

	id	name	price	in_stock
0	1	shoes	50.3	True
1	2	tshirt	10.5	True
2	3	ball	20.0	False

## Checking Glue Catalog Databases

```
[4]: databases = wr.catalog.databases()
print(databases)
```

	Database	Description
0	aws_sdk_pandas	AWS SDK for pandas Test Arena - Glue Database
1	default	Default Hive database

Create the database `awswrangler_test` if not exists

```
[5]: if "awswrangler_test" not in databases.values:
    wr.catalog.create_database("awswrangler_test")
    print(wr.catalog.databases())
else:
    print("Database awswrangler_test already exists")
```

	Database	Description
0	aws_sdk_pandas	AWS SDK for pandas Test Arena - Glue Database
1	awswrangler_test	
2	default	Default Hive database

### Checking the empty database

```
[6]: wr.catalog.tables(database="awswrangler_test")  
[6]: Empty DataFrame  
Columns: [Database, Table, Description, Columns, Partitions]  
Index: []
```

### Writing DataFrames to Data Lake (S3 + Parquet + Glue Catalog)

```
[7]: desc = "This is my product table."  
  
param = {  
    "source": "Product Web Service",  
    "class": "e-commerce"  
}  
  
comments = {  
    "id": "Unique product ID.",  
    "name": "Product name",  
    "price": "Product price (dollar)",  
    "in_stock": "Is this product available in the stock?"  
}  
  
res = wr.s3.to_parquet(  
    df=df,  
    path=f"s3://{{bucket}}/products/",  
    dataset=True,  
    database="awswrangler_test",  
    table="products",  
    mode="overwrite",  
    glue_table_settings=wr.typing.GlueTableSettings(  
        description=desc,  
        parameters=param,  
        columns_comments=comments  
    ),  
)
```

## Checking Glue Catalog (AWS Console)

Tables > products

Last updated 18 Sep 2020 Table Version (Current version) ▾

[Edit table](#) [Delete table](#) [View properties](#) [Compare versions](#) [Edit schema](#)

Name	products
Description	This is my product table.
Database	awswrangler_test
Classification	parquet
Location	s3://igor-tavares/products/
Connection	
Deprecated	No
Last updated	Fri Sep 18 19:03:00 GMT-300 2020
Input format	org.apache.hadoop.hive.ql.io.parquet.MapredParquetInputFormat
Output format	org.apache.hadoop.hive.ql.io.parquet.MapredParquetOutputFormat
Serde serialization lib	org.apache.hadoop.hive.ql.io.parquet.serde.ParquetHiveSerDe
Serde parameters	serialization.format: 1
Table properties	compressionType: snappy source: Product Web Service projection.enabled: false class: e-commerce typeOfData: file

Schema

Showing: 1 - 4 of 4 < >

Column name	Data type	Partition key	Comment
1 id	bigint		Unique product ID.
2 name	string		Product name
3 price	double		Product price (dollar)
4 in_stock	boolean		Is this product available in the stock?

## Looking Up for the new table!

```
[8]: wr.catalog.tables(name_contains="roduc")
```

```
[8]:   Database      Table           Description \
0  awswrangler_test  products  This is my product table.

          Columns Partitions
0  id, name, price, in_stock
```

```
[9]: wr.catalog.tables(name_prefix="pro")
```

```
[9]:   Database      Table           Description \
0  awswrangler_test  products  This is my product table.

          Columns Partitions
0  id, name, price, in_stock
```

```
[10]: wr.catalog.tables(name_suffix="ts")
```

```
[10]:   Database      Table           Description \
0  awswrangler_test  products  This is my product table.

          Columns Partitions
0  id, name, price, in_stock
```

```
[11]: wr.catalog.tables(search_text="This is my")
```

```
[11]:   Database      Table           Description \
0  awswrangler_test  products  This is my product table.
```

(continues on next page)

(continued from previous page)

```
Columns Partitions
0  id, name, price, in_stock
```

## Getting tables details

```
[12]: wr.catalog.table(database="awswrangler_test", table="products")
```


```
[12]:   Column Name      Type  Partition          Comment
0       id      bigint      False    Unique product ID.
1     name      string      False    Product name
2    price     double      False  Product price (dollar)
3  in_stock    boolean      False  Is this product available in the stock?
```

## Cleaning Up the Database

```
[13]: for table in wr.catalog.get_tables(database="awswrangler_test"):
        wr.catalog.delete_table_if_exists(database="awswrangler_test", table=table["Name"])
```

## Delete Database

```
[14]: wr.catalog.delete_database('awswrangler_test')
```



AWS SDK for pandas

## 1.8.6 6 - Amazon Athena

awswrangler has three ways to run queries on Athena and fetch the result as a DataFrame:

- **ctas\_approach=True** (Default)

Wraps the query with a CTAS and then reads the table data as parquet directly from s3.

– PROS:

- \* Faster for mid and big result sizes.
- \* Can handle some level of nested types.

– CONS:

- \* Requires create/delete table permissions on Glue.
- \* Does not support timestamp with time zone
- \* Does not support columns with repeated names.
- \* Does not support columns with undefined data types.
- \* A temporary table will be created and then deleted immediately.
- \* Does not support custom data\_source/catalog\_id.

- **unload\_approach=True and ctas\_approach=False**

Does an UNLOAD query on Athena and parse the Parquet result on s3.

– PROS:

- \* Faster for mid and big result sizes.
- \* Can handle some level of nested types.
- \* Does not modify Glue Data Catalog.

– CONS:

- \* Output S3 path must be empty.
- \* Does not support timestamp with time zone
- \* Does not support columns with repeated names.
- \* Does not support columns with undefined data types.

- **ctas\_approach=False**

Does a regular query on Athena and parse the regular CSV result on s3.

– PROS:

- \* Faster for small result sizes (less latency).
- \* Does not require create/delete table permissions on Glue
- \* Supports timestamp with time zone.
- \* Support custom data\_source/catalog\_id.

– CONS:

- \* Slower (But still faster than other libraries that uses the regular Athena API)
- \* Does not handle nested types at all.

```
[1]: import awswrangler as wr
```

**Enter your bucket name:**

```
[2]: import getpass
bucket = getpass.getpass()
path = f"s3://{bucket}/data/"
```

## Checking/Creating Glue Catalog Databases

```
[3]: if "awswrangler_test" not in wr.catalog.databases().values:  
    wr.catalog.create_database("awswrangler_test")
```

## Creating a Parquet Table from the NOAA's CSV files

### Reference

```
[ ]: cols = ["id", "dt", "element", "value", "m_flag", "q_flag", "s_flag", "obs_time"]  
  
df = wr.s3.read_csv(  
    path="s3://noaa-ghcn-pds/csv/by_year/189",  
    names=cols,  
    parse_dates=["dt", "obs_time"]) # Read 10 files from the 1890 decade (~1GB)  
  
df
```

```
[ ]: wr.s3.to_parquet(  
    df=df,  
    path=path,  
    dataset=True,  
    mode="overwrite",  
    database="awswrangler_test",  
    table="noaa"  
)
```

```
[ ]: wr.catalog.table(database="awswrangler_test", table="noaa")
```

## Reading with ctas\_approach=False

```
[ ]: %%time  
  
wr.athena.read_sql_query("SELECT * FROM noaa", database="awswrangler_test", ctas_  
approach=False)
```

## Default with ctas\_approach=True - 13x faster (default)

```
[ ]: %%time  
  
wr.athena.read_sql_query("SELECT * FROM noaa", database="awswrangler_test")
```

## Using categories to speed up and save memory - 24x faster

```
[ ]: %%time

wr.athena.read_sql_query("SELECT * FROM noaa", database="awsrangler_test", categories=[
    "id", "dt", "element", "value", "m_flag", "q_flag", "s_flag", "obs_time"])
```

## Reading with unload\_approach=True

```
[ ]: %%time

wr.athena.read_sql_query("SELECT * FROM noaa", database="awsrangler_test", ctas_
    approach=False, unload_approach=True, s3_output=f"s3://{bucket}/unload/")
```

## Batching (Good for restricted memory environments)

```
[ ]: %%time

dfs = wr.athena.read_sql_query(
    "SELECT * FROM noaa",
    database="awsrangler_test",
    chunksize=True # Chunksize calculated automatically for ctas_approach.
)

for df in dfs: # Batching
    print(len(df.index))
```

```
[ ]: %%time

dfs = wr.athena.read_sql_query(
    "SELECT * FROM noaa",
    database="awsrangler_test",
    chunksize=100_000_000
)

for df in dfs: # Batching
    print(len(df.index))
```

## Cleaning Up S3


```
[ ]: wr.s3.delete_objects(path)
```

## Delete table

```
[ ]: wr.catalog.delete_table_if_exists(database="awsrangler_test", table="noaa")
```

## Delete Database

```
[ ]: wr.catalog.delete_database('awsrangler_test')
```



AWS SDK for pandas

## 1.8.7 7 - Redshift, MySQL, PostgreSQL, SQL Server and Oracle

awsrangler's Redshift, MySQL and PostgreSQL have two basic functions in common that try to follow Pandas conventions, but add more data type consistency.

- `wr.redshift.to_sql()`
- `wr.redshift.read_sql_query()`
- `wr.mysql.to_sql()`
- `wr.mysql.read_sql_query()`
- `wr.postgresql.to_sql()`
- `wr.postgresql.read_sql_query()`
- `wr.sqlserver.to_sql()`
- `wr.sqlserver.read_sql_query()`
- `wr.oracle.to_sql()`
- `wr.oracle.read_sql_query()`

```
[ ]: # Install the optional modules first
!pip install 'awsrangler[redshift, postgres, mysql, sqlserver, oracle]'
```

```
[1]: import awswrangler as wr
import pandas as pd

df = pd.DataFrame({
    "id": [1, 2],
    "name": ["foo", "boo"]
})
```

## Connect using the Glue Catalog Connections

- wr.redshift.connect()
- wr.mysql.connect()
- wr.postgresql.connect()
- wr.sqlserver.connect()
- wr.oracle.connect()

```
[2]: con_redshift = wr.redshift.connect("aws-sdk-pandas-redshift")
con_mysql = wr.mysql.connect("aws-sdk-pandas-mysql")
con_postgresql = wr.postgresql.connect("aws-sdk-pandas-postgresql")
con_sqlserver = wr.sqlserver.connect("aws-sdk-pandas-sqlserver")
con_oracle = wr.oracle.connect("aws-sdk-pandas-oracle")
```

## Raw SQL queries (No Pandas)

```
[3]: with con_redshift.cursor() as cursor:
    for row in cursor.execute("SELECT 1"):
        print(row)
[1]
```

## Loading data to Database


```
[4]: wr.redshift.to_sql(df, con_redshift, schema="public", table="tutorial", mode="overwrite")
wr.mysql.to_sql(df, con_mysql, schema="test", table="tutorial", mode="overwrite")
wr.postgresql.to_sql(df, con_postgresql, schema="public", table="tutorial", mode=
    "overwrite")
wr.sqlserver.to_sql(df, con_sqlserver, schema="dbo", table="tutorial", mode="overwrite")
wr.oracle.to_sql(df, con_oracle, schema="test", table="tutorial", mode="overwrite")
```

## Unloading data from Database

```
[5]: wr.redshift.read_sql_query("SELECT * FROM public.tutorial", con=con_redshift)
wr.mysql.read_sql_query("SELECT * FROM test.tutorial", con=con_mysql)
wr.postgresql.read_sql_query("SELECT * FROM public.tutorial", con=con_postgresql)
wr.sqlserver.read_sql_query("SELECT * FROM dbo.tutorial", con=con_sqlserver)
wr.oracle.read_sql_query("SELECT * FROM test.tutorial", con=con_oracle)
```

```
[5]: id name
0   1   foo
1   2   boo
```

```
[6]: con_redshift.close()
con_mysql.close()
con_postgresql.close()
con_sqlserver.close()
con_oracle.close()
```



AWS SDK for pandas

### 1.8.8 8 - Redshift - COPY & UNLOAD

Amazon Redshift has two SQL command that help to load and unload large amount of data staging it on Amazon S3:

1 - COPY

2 - UNLOAD

Let's take a look and how awswrangler can use it.

```
[ ]: # Install the optional modules first  
!pip install 'awswrangler[redshift]'
```

```
[1]: import awswrangler as wr  
  
con = wr.redshift.connect("aws-sdk-pandas-redshift")
```

Enter your bucket name:

```
[2]: import getpass  
bucket = getpass.getpass()  
path = f"s3://{{bucket}}/stage/"  
  
.....
```

Enter your IAM ROLE ARN:

```
[3]: iam_role = getpass.getpass()  
  
.....
```

## Creating a DataFrame from the NOAA's CSV files

Reference

```
[4]: cols = ["id", "dt", "element", "value", "m_flag", "q_flag", "s_flag", "obs_time"]

df = wr.s3.read_csv(
    path="s3://noaa-ghcn-pds/csv/by_year/1897.csv",
    names=cols,
    parse_dates=["dt", "obs_time"]) # ~127MB, ~4MM rows

df
```

	id	dt	element	value	m_flag	q_flag	s_flag	obs_time
0	AG000060590	1897-01-01	TMAX	170	NaN	NaN	E	NaN
1	AG000060590	1897-01-01	TMIN	-14	NaN	NaN	E	NaN
2	AG000060590	1897-01-01	PRCP	0	NaN	NaN	E	NaN
3	AGE00135039	1897-01-01	TMAX	140	NaN	NaN	E	NaN
4	AGE00135039	1897-01-01	TMIN	40	NaN	NaN	E	NaN
...	...	...	...	...	...	...	...	...
3923594	UZM00038457	1897-12-31	TMIN	-145	NaN	NaN	r	NaN
3923595	UZM00038457	1897-12-31	PRCP	4	NaN	NaN	r	NaN
3923596	UZM00038457	1897-12-31	TAVG	-95	NaN	NaN	r	NaN
3923597	UZM00038618	1897-12-31	PRCP	66	NaN	NaN	r	NaN
3923598	UZM00038618	1897-12-31	TAVG	-45	NaN	NaN	r	NaN

[3923599 rows x 8 columns]

## Load and Unload with COPY and UNLOAD commands

Note: Please use a empty S3 path for the COPY command.

```
[5]: %time

wr.redshift.copy(
    df=df,
    path=path,
    con=con,
    schema="public",
    table="commands",
    mode="overwrite",
    iam_role=iam_role,
)
CPU times: user 2.78 s, sys: 293 ms, total: 3.08 s
Wall time: 20.7 s
```

```
[6]: %time

wr.redshift.unload(
    sql="SELECT * FROM public.commands",
    con=con,
    iam_role=iam_role,
```

(continues on next page)

(continued from previous page)

```

    path=path,
    keep_files=True,
)


CPU times: user 10 s, sys: 1.14 s, total: 11.2 s
Wall time: 27.5 s

[6]:      id      dt element  value m_flag q_flag s_flag obs_time
0   AG000060590 1897-01-01    TMAX  170 <NA> <NA>   E <NA>
1   AG000060590 1897-01-01    PRCP    0 <NA> <NA>   E <NA>
2   AGE00135039 1897-01-01    TMIN   40 <NA> <NA>   E <NA>
3   AGE00147705 1897-01-01    TMAX  164 <NA> <NA>   E <NA>
4   AGE00147705 1897-01-01    PRCP    0 <NA> <NA>   E <NA>
...
...
3923594 USW00094967 1897-12-31    TMAX -144 <NA> <NA>   6 <NA>
3923595 USW00094967 1897-12-31    PRCP    0     P <NA> <NA>   6 <NA>
3923596 UZM00038457 1897-12-31    TMAX  -49 <NA> <NA>   r <NA>
3923597 UZM00038457 1897-12-31    PRCP    4 <NA> <NA>   r <NA>
3923598 UZM00038618 1897-12-31    PRCP   66 <NA> <NA>   r <NA>

[7847198 rows x 8 columns]

```

```
[7]: con.close()
```



AWS SDK for pandas

### 1.8.9 9 - Redshift - Append, Overwrite and Upsert

awswrangler's `copy/to_sql` function has three different `mode` options for Redshift.

- 1 - append
- 2 - overwrite
- 3 - upsert

```
[ ]: # Install the optional modules first
!pip install 'awswrangler[redshift]'
```

```
[2]: import awswrangler as wr
import pandas as pd
from datetime import date
```

(continues on next page)

(continued from previous page)

```
con = wr.redshift.connect("aws-sdk-pandas-redshift")
```

Enter your bucket name:

```
[3]: import getpass
bucket = getpass.getpass()
path = f"s3://{bucket}/stage/"
....
```

Enter your IAM ROLE ARN:

```
[4]: iam_role = getpass.getpass()
....
```

Creating the table (Overwriting if it exists)

```
[10]: df = pd.DataFrame({
        "id": [1, 2],
        "value": ["foo", "boo"],
        "date": [date(2020, 1, 1), date(2020, 1, 2)]})
wr.redshift.copy(
    df=df,
    path=path,
    con=con,
    schema="public",
    table="my_table",
    mode="overwrite",
    iam_role=iam_role,
    primary_keys=["id"])
wr.redshift.read_sql_table(table="my_table", schema="public", con=con)
```

	id	value	date
0	2	boo	2020-01-02
1	1	foo	2020-01-01

## Appending

```
[11]: df = pd.DataFrame({
    "id": [3],
    "value": ["bar"],
    "date": [date(2020, 1, 3)]
})

wr.redshift.copy(
    df=df,
    path=path,
    con=con,
    schema="public",
    table="my_table",
    mode="append",
    iam_role=iam_role,
    primary_keys=["id"]
)

wr.redshift.read_sql_table(table="my_table", schema="public", con=con)
```

[11]:

	id	value	date
0	1	foo	2020-01-01
1	2	boo	2020-01-02
2	3	bar	2020-01-03

## Upserting

```
[12]: df = pd.DataFrame({
    "id": [2, 3],
    "value": ["xoo", "bar"],
    "date": [date(2020, 1, 2), date(2020, 1, 3)]
})

wr.redshift.copy(
    df=df,
    path=path,
    con=con,
    schema="public",
    table="my_table",
    mode="upsert",
    iam_role=iam_role,
    primary_keys=["id"]
)


wr.redshift.read_sql_table(table="my_table", schema="public", con=con)
```

[12]:

	id	value	date
0	1	foo	2020-01-01
1	2	xoo	2020-01-02
2	3	bar	2020-01-03

## Cleaning Up

```
[13]: with con.cursor() as cursor:
    cursor.execute("DROP TABLE public.my_table")
con.close()
```



AWS SDK for pandas

### 1.8.10 10 - Parquet Crawler

`awswrangler` can extract only the metadata from Parquet files and Partitions and then add it to the Glue Catalog.

```
[1]: import awswrangler as wr
```

Enter your bucket name:

```
[2]: import getpass
bucket = getpass.getpass()
path = f"s3://{{bucket}}/data/"
.......
```

### Creating a Parquet Table from the NOAA's CSV files

Reference

```
[3]: cols = ["id", "dt", "element", "value", "m_flag", "q_flag", "s_flag", "obs_time"]

df = wr.s3.read_csv(
    path="s3://noaa-ghcn-pds/csv/by_year/189",
    names=cols,
    parse_dates=["dt", "obs_time"]) # Read 10 files from the 1890 decade (~1GB)

df
```

	id	dt	element	value	m_flag	q_flag	s_flag	obs_time
0	AGE00135039	1890-01-01	TMAX	160	NaN	NaN	E	NaN
1	AGE00135039	1890-01-01	TMIN	30	NaN	NaN	E	NaN
2	AGE00135039	1890-01-01	PRCP	45	NaN	NaN	E	NaN

(continues on next page)

(continued from previous page)

3	AGE00147705	1890-01-01	TMAX	140	NaN	NaN	E	NaN
4	AGE00147705	1890-01-01	TMIN	74	NaN	NaN	E	NaN
...	...	...	...	...	...	...	...	...
29249753	UZM00038457	1899-12-31	PRCP	16	NaN	NaN	r	NaN
29249754	UZM00038457	1899-12-31	TAVG	-73	NaN	NaN	r	NaN
29249755	UZM00038618	1899-12-31	TMIN	-76	NaN	NaN	r	NaN
29249756	UZM00038618	1899-12-31	PRCP	0	NaN	NaN	r	NaN
29249757	UZM00038618	1899-12-31	TAVG	-60	NaN	NaN	r	NaN

[29249758 rows x 8 columns]

[4]: df["year"] = df["dt"].dt.year

df.head(3)

	id	dt	element	value	m_flag	q_flag	s_flag	obs_time	year
0	AGE00135039	1890-01-01	TMAX	160	NaN	NaN	E	NaN	1890
1	AGE00135039	1890-01-01	TMIN	30	NaN	NaN	E	NaN	1890
2	AGE00135039	1890-01-01	PRCP	45	NaN	NaN	E	NaN	1890

[5]: res = wr.s3.to\_parquet(

```
df=df,
path=path,
dataset=True,
mode="overwrite",
partition_cols=["year"],
)
```

[6]: [x.split("data/", 1)[1] for x in wr.s3.list\_objects(path)]

```
['year=1890/06a519acf8e48c9b08c8908f30adcfe.snappy.parquet',
'year=1891/5a99c28dbef54008bfc770c946099e02.snappy.parquet',
'year=1892/9b1ea5d1cfad40f78c920f93540ca8ec.snappy.parquet',
'year=1893/92259b49c134401leaf772506ee802af6.snappy.parquet',
'year=1894/c734469ffff944f69dc277c630064a16.snappy.parquet',
'year=1895/cf7ccde86aaf4d138f86c379c0817aa6.snappy.parquet',
'year=1896/ce02f4c2c554438786b766b33db451b6.snappy.parquet',
'year=1897/e04de04ad3c444deadcc9c410ab97ca1.snappy.parquet',
'year=1898/acb0e02878f04b56a6200f4b5a97be0e.snappy.parquet',
'year=1899/a269bdbb0f6a48faac55f3bcfef7df7a.snappy.parquet']
```

## Crawling!

[7]: %time

```
res = wr.s3.store_parquet_metadata(
    path=path,
    database="awswrangler_test",
    table="crawler",
    dataset=True,
    mode="overwrite",
```

(continues on next page)

(continued from previous page)

```

    dtype={"year": "int"}
)
CPU times: user 1.81 s, sys: 528 ms, total: 2.33 s
Wall time: 3.21 s

```

## Checking

[8]: `wr.catalog.table(database="awsrangler_test", table="crawler")`

	Column	Name	Type	Partition	Comment
0		id	string		False
1		dt	timestamp		False
2		element	string		False
3		value	bigint		False
4		m_flag	string		False
5		q_flag	string		False
6		s_flag	string		False
7		obs_time	string		False
8		year	int		True

[9]: `%time`

```
wr.athena.read_sql_query("SELECT * FROM crawler WHERE year=1890", database="awsrangler_
˓→test")
```

CPU times: user 3.52 s, sys: 811 ms, total: 4.33 s  
Wall time: 9.6 s

	id	dt	element	value	m_flag	q_flag	s_flag	obs_time	\
0	USC00195145	1890-01-01	TMIN	-28	<NA>	<NA>	6	<NA>	
1	USC00196770	1890-01-01	PRCP	0	P	<NA>	6	<NA>	
2	USC00196770	1890-01-01	SNOW	0	<NA>	<NA>	6	<NA>	
3	USC00196915	1890-01-01	PRCP	0	P	<NA>	6	<NA>	
4	USC00196915	1890-01-01	SNOW	0	<NA>	<NA>	6	<NA>	
...	...	...	...	...	...	...	...	...	...
6139	ASN00022006	1890-12-03	PRCP	0	<NA>	<NA>	a	<NA>	
6140	ASN00022007	1890-12-03	PRCP	0	<NA>	<NA>	a	<NA>	
6141	ASN00022008	1890-12-03	PRCP	0	<NA>	<NA>	a	<NA>	
6142	ASN00022009	1890-12-03	PRCP	0	<NA>	<NA>	a	<NA>	
6143	ASN00022011	1890-12-03	PRCP	0	<NA>	<NA>	a	<NA>	
			year						
0			1890						
1			1890						
2			1890						
3			1890						
4			1890						
...			...						
6139			1890						
6140			1890						
6141			1890						

(continues on next page)

(continued from previous page)

```
6142    1890
6143    1890


[1276246 rows x 9 columns]
```

## Cleaning Up S3

```
[10]: wr.s3.delete_objects(path)
```

## Cleaning Up the Database

```
[11]: for table in wr.catalog.get_tables(database="awswrangler_test"):
    wr.catalog.delete_table_if_exists(database="awswrangler_test", table=table["Name"])
```



AWS SDK for pandas

### 1.8.11 11 - CSV Datasets

awswrangler has 3 different write modes to store CSV Datasets on Amazon S3.

- **append** (Default)

Only adds new files without any delete.

- **overwrite**

Deletes everything in the target directory and then add new files.

- **overwrite\_partitions** (Partition Upsert)

Only deletes the paths of partitions that should be updated and then writes the new partitions files. It's like a "partition Upsert".

```
[1]: from datetime import date
import awswrangler as wr
import pandas as pd
```

Enter your bucket name:

```
[2]: import getpass
bucket = getpass.getpass()
path = f"s3://{{bucket}}/dataset/"
.......
```

## Checking/Creating Glue Catalog Databases

```
[3]: if "awswrangler_test" not in wr.catalog.databases().values:
    wr.catalog.create_database("awswrangler_test")
```

## Creating the Dataset

```
[4]: df = pd.DataFrame({
    "id": [1, 2],
    "value": ["foo", "boo"],
    "date": [date(2020, 1, 1), date(2020, 1, 2)]
})

wr.s3.to_csv(
    df=df,
    path=path,
    index=False,
    dataset=True,
    mode="overwrite",
    database="awswrangler_test",
    table="csv_dataset"
)

wr.athena.read_sql_table(database="awswrangler_test", table="csv_dataset")
```

	id	value	date
0	1	foo	2020-01-01
1	2	boo	2020-01-02

## Appending

```
[5]: df = pd.DataFrame({
    "id": [3],
    "value": ["bar"],
    "date": [date(2020, 1, 3)]
})

wr.s3.to_csv(
    df=df,
    path=path,
    index=False,
```

(continues on next page)

(continued from previous page)

```
dataset=True,
mode="append",
database="awswrangler_test",
table="csv_dataset"
)

wr.athena.read_sql_table(database="awswrangler_test", table="csv_dataset")

[5]:   id value      date
0    3   bar  2020-01-03
1    1   foo  2020-01-01
2    2   boo  2020-01-02
```

## Overwriting

```
[6]: wr.s3.to_csv(
    df=df,
    path=path,
    index=False,
    dataset=True,
    mode="overwrite",
    database="awswrangler_test",
    table="csv_dataset"
)

wr.athena.read_sql_table(database="awswrangler_test", table="csv_dataset")

[6]:   id value      date
0    3   bar  2020-01-03
```

## Creating a Partitioned Dataset

```
[7]: df = pd.DataFrame({
    "id": [1, 2],
    "value": ["foo", "boo"],
    "date": [date(2020, 1, 1), date(2020, 1, 2)]
})

wr.s3.to_csv(
    df=df,
    path=path,
    index=False,
    dataset=True,
    mode="overwrite",
    database="awswrangler_test",
    table="csv_dataset",
    partition_cols=["date"]
)

wr.athena.read_sql_table(database="awswrangler_test", table="csv_dataset")
```

```
[7]:   id value      date
  0   2   boo  2020-01-02
  1   1   foo  2020-01-01
```

### Upserting partitions (overwrite\_partitions)

```
[8]: df = pd.DataFrame({
    "id": [2, 3],
    "value": ["xoo", "bar"],
    "date": [date(2020, 1, 2), date(2020, 1, 3)]
})

wr.s3.to_csv(
    df=df,
    path=path,
    index=False,
    dataset=True,
    mode="overwrite_partitions",
    database="aws_wrangler_test",
    table="csv_dataset",
    partition_cols=["date"]
)

wr.athena.read_sql_table(database="aws_wrangler_test", table="csv_dataset")
```

[8]:	id value      date
	0   1   foo  2020-01-01
	1   2   xoo  2020-01-02
	0   3   bar  2020-01-03


### BONUS - Glue/Athena integration

```
[9]: df = pd.DataFrame({
    "id": [1, 2],
    "value": ["foo", "boo"],
    "date": [date(2020, 1, 1), date(2020, 1, 2)]
})

wr.s3.to_csv(
    df=df,
    path=path,
    dataset=True,
    index=False,
    mode="overwrite",
    database="aws_sdk_pandas",
    table="my_table",
    compression="gzip"
)

wr.athena.read_sql_query("SELECT * FROM my_table", database="aws_sdk_pandas")
```

```
[9]:    id value      date
  0   1   foo  2020-01-01
  1   2   boo  2020-01-02
```



AWS SDK for pandas

### 1.8.12 12 - CSV Crawler

`awswrangler` can extract only the metadata from a Pandas DataFrame and then add it can be added to Glue Catalog as a table.

```
[1]: import awswrangler as wr
from datetime import datetime
import pandas as pd
```

Enter your bucket name:

```
[2]: import getpass
bucket = getpass.getpass()
path = f"s3://{{bucket}}/csv_crawler/"
.....
```

### Creating a Pandas DataFrame

```
[3]: ts = lambda x: datetime.strptime(x, "%Y-%m-%d %H:%M:%S.%f") # noqa
dt = lambda x: datetime.strptime(x, "%Y-%m-%d").date() # noqa

df = pd.DataFrame(
{
    "id": [1, 2, 3],
    "string": ["foo", None, "boo"],
    "float": [1.0, None, 2.0],
    "date": [dt("2020-01-01"), None, dt("2020-01-02")],
    "timestamp": [ts("2020-01-01 00:00:00.0"), None, ts("2020-01-02 00:00:01.0")],
    "bool": [True, None, False],
    "par0": [1, 1, 2],
    "par1": ["a", "b", "b"],
```

(continues on next page)

(continued from previous page)

```

    }
)

df
[3]:   id  string  float      date      timestamp  bool  par0  par1
0    1    foo     1.0  2020-01-01 2020-01-01 00:00:00  True     1     a
1    2    None    NaN        None           NaT  None     1     b
2    3    boo     2.0  2020-01-02 2020-01-02 00:00:01 False     2     b

```

## Extracting the metadata

```
[4]: columns_types, partitions_types = wr.catalog.extract_athena_types(
    df=df,
    file_format="csv",
    index=False,
    partition_cols=["par0", "par1"]
)
```

```
[5]: columns_types
```

```
[5]: {'id': 'bigint',
      'string': 'string',
      'float': 'double',
      'date': 'date',
      'timestamp': 'timestamp',
      'bool': 'boolean'}
```

```
[6]: partitions_types
```

```
[6]: {'par0': 'bigint', 'par1': 'string'}
```

## Creating the table

```
[7]: wr.catalog.create_csv_table(
    table="csv_crawler",
    database="aws_wrangler_test",
    path=path,
    partitions_types=partitions_types,
    columns_types=columns_types,
)
```

## Checking

```
[8]: wr.catalog.table(database="awsrangler_test", table="csv_crawler")
```

```
[8]:   Column Name      Type  Partition Comment
  0        id      bigint      False
  1     string      string      False
  2      float      double      False
  3      date       date      False
  4 timestamp    timestamp      False
  5      bool      boolean      False
  6     par0      bigint      True
  7     par1      string      True
```

We can still using the extracted metadata to ensure all data types consistence to new data

```
[9]: df = pd.DataFrame(
    {
        "id": [1],
        "string": ["1"],
        "float": [1],
        "date": [ts("2020-01-01 00:00:00.0")],
        "timestamp": [dt("2020-01-02")],
        "bool": [1],
        "par0": [1],
        "par1": ["a"],
    }
)
```

```
df
```

```
[9]:   id  string  float      date  timestamp  bool  par0  par1
  0    1        1      1  2020-01-01  2020-01-02      1      1     a
```

```
[10]: res = wr.s3.to_csv(
    df=df,
    path=path,
    index=False,
    dataset=True,
    database="awsrangler_test",
    table="csv_crawler",
    partition_cols=["par0", "par1"],
    dtype=columns_types
)
```

You can also extract the metadata directly from the Catalog if you want

```
[11]: dtype = wr.catalog.get_table_types(database="awswrangler_test", table="csv_crawler")

[12]: res = wr.s3.to_csv(
        df=df,
        path=path,
        index=False,
        dataset=True,
        database="awswrangler_test",
        table="csv_crawler",
        partition_cols=["par0", "par1"],
        dtype=dtype
    )
```

## Checking out

```
[13]: df = wr.athena.read_sql_table(database="awswrangler_test", table="csv_crawler")

df
[13]:   id string  float  date  timestamp  bool  par0 par1
  0   1      1     1.0  None  2020-01-02  True     1     a
  1   1      1     1.0  None  2020-01-02  True     1     a

[14]: df.dtypes
[14]: id          Int64
       string      string
       float       float64
       date        object
       timestamp  datetime64[ns]
       bool        boolean
       par0         Int64
       par1         string
       dtype: object
```


## Cleaning Up S3

```
[15]: wr.s3.delete_objects(path)
```

## Cleaning Up the Database

```
[16]: wr.catalog.delete_table_if_exists(database="awswrangler_test", table="csv_crawler")
```

```
[16]: True
```



AWS SDK for pandas

### 1.8.13 13 - Merging Datasets on S3

awswrangler has 3 different copy modes to store Parquet Datasets on Amazon S3.

- **append** (Default)

Only adds new files without any delete.

- **overwrite**

Deletes everything in the target directory and then add new files.

- **overwrite\_partitions** (Partition Upsert)

Only deletes the paths of partitions that should be updated and then writes the new partitions files. It's like a "partition Upsert".

```
[1]: from datetime import date
import awswrangler as wr
import pandas as pd
```

Enter your bucket name:

```
[2]: import getpass
bucket = getpass.getpass()
path1 = f"s3://{{bucket}}/dataset1/"
path2 = f"s3://{{bucket}}/dataset2/"
.....
```

## Creating Dataset 1

```
[3]: df = pd.DataFrame({
    "id": [1, 2],
    "value": ["foo", "boo"],
    "date": [date(2020, 1, 1), date(2020, 1, 2)]
})

wr.s3.to_parquet(
    df=df,
    path=path1,
    dataset=True,
    mode="overwrite",
    partition_cols=["date"]
)

wr.s3.read_parquet(path1, dataset=True)
```

	id	value	date
0	1	foo	2020-01-01
1	2	boo	2020-01-02

## Creating Dataset 2

```
[4]: df = pd.DataFrame({
    "id": [2, 3],
    "value": ["xoo", "bar"],
    "date": [date(2020, 1, 2), date(2020, 1, 3)]
})

dataset2_files = wr.s3.to_parquet(
    df=df,
    path=path2,
    dataset=True,
    mode="overwrite",
    partition_cols=["date"]
)["paths"]

wr.s3.read_parquet(path2, dataset=True)
```

	id	value	date
0	2	xoo	2020-01-02
1	3	bar	2020-01-03

### Merging (Dataset 2 -> Dataset 1) (APPEND)

```
[5]: wr.s3.merge_datasets(  
    source_path=path2,  
    target_path=path1,  
    mode="append"  
)  
  
wr.s3.read_parquet(path1, dataset=True)  
[5]:  
   id  value      date  
0   1    foo  2020-01-01  
1   2    xoo  2020-01-02  
2   2    boo  2020-01-02  
3   3    bar  2020-01-03
```

### Merging (Dataset 2 -> Dataset 1) (OVERWRITE\_PARTITIONS)


```
[6]: wr.s3.merge_datasets(  
    source_path=path2,  
    target_path=path1,  
    mode="overwrite_partitions"  
)  
  
wr.s3.read_parquet(path1, dataset=True)  
[6]:  
   id  value      date  
0   1    foo  2020-01-01  
1   2    xoo  2020-01-02  
2   3    bar  2020-01-03
```

### Merging (Dataset 2 -> Dataset 1) (OVERWRITE)

```
[7]: wr.s3.merge_datasets(  
    source_path=path2,  
    target_path=path1,  
    mode="overwrite"  
)  
  
wr.s3.read_parquet(path1, dataset=True)  
[7]:  
   id  value      date  
0   2    xoo  2020-01-02  
1   3    bar  2020-01-03
```

## Cleaning Up

```
[8]: wr.s3.delete_objects(path1)
wr.s3.delete_objects(path2)
```



AWS SDK for pandas

## 1.8.14 14 - Schema Evolution

awswrangler supports new **columns** on Parquet and CSV datasets through:

- wr.s3.to\_parquet()
- wr.s3.store\_parquet\_metadata() i.e. “Crawler”
- wr.s3.to\_csv()

```
[1]: from datetime import date
import awswrangler as wr
import pandas as pd
```

Enter your bucket name:

```
[2]: import getpass
bucket = getpass.getpass()
path = f"s3://[{bucket}]/dataset/"
....
```

## Creating the Dataset

### Parquet Create

```
[3]: df = pd.DataFrame({
    "id": [1, 2],
    "value": ["foo", "boo"],
})
wr.s3.to_parquet(
    df=df,
```

(continues on next page)

(continued from previous page)

```
path=path,
dataset=True,
mode="overwrite",
database="aws_sdk_pandas",
table="my_table"
)

wr.s3.read_parquet(path, dataset=True)

[3]:   id value
 0   1   foo
 1   2   boo
```

## CSV Create

```
[ ]: df = pd.DataFrame({
    "id": [1, 2],
    "value": ["foo", "boo"],
})

wr.s3.to_csv(
    df=df,
    path=path,
    dataset=True,
    mode="overwrite",
    database="aws_sdk_pandas",
    table="my_table"
)

wr.s3.read_csv(path, dataset=True)
```

## Schema Version 0 on Glue Catalog (AWS Console)

Tables > my\_table

Last updated 19 May 2020 Table Version (Current version) ▾

Version	Created	Created by
0	19 May 2020 7:0...	[REDACTED]

**Table properties**

compressionType: snappy, typeOfData: file

**Schema**

Column name	Data type	Partition key	Comment
1	id	bigint	
2	value	string	

## Appending with NEW COLUMNS

### Parquet Append

```
[4]: df = pd.DataFrame({
    "id": [3, 4],
    "value": ["bar", None],
    "date": [date(2020, 1, 3), date(2020, 1, 4)],
    "flag": [True, False]
})

wr.s3.to_parquet(
    df=df,
    path=path,
    dataset=True,
    mode="append",
    database="aws_sdk_pandas",
    table="my_table",
    catalog_versioning=True # Optional
)

wr.s3.read_parquet(path, dataset=True, validate_schema=False)
```

	id	value	date	flag
0	3	bar	2020-01-03	True
1	4	None	2020-01-04	False

(continues on next page)

(continued from previous page)

2	1	foo	NaN	NaN
3	2	boo	NaN	NaN

## CSV Append

Note: for CSV datasets due to [column ordering](#), by default, schema evolution is disabled. Enable it by passing `schema_evolution=True` flag

```
[ ]: df = pd.DataFrame({
    "id": [3, 4],
    "value": ["bar", None],
    "date": [date(2020, 1, 3), date(2020, 1, 4)],
    "flag": [True, False]
})

wr.s3.to_csv(
    df=df,
    path=path,
    dataset=True,
    mode="append",
    database="aws_sdk_pandas",
    table="my_table",
    schema_evolution=True,
    catalog_versioning=True # Optional
)

wr.s3.read_csv(path, dataset=True, validate_schema=False)
```

## Schema Version 1 on Glue Catalog (AWS Console)

Name: my\_table  
 Description:  
 Database: aws\_data\_wrangler  
 Classification: parquet  
 Location: s3://[REDACTED]dataset/  
 Connection:  
 Deprecated: No  
 Last updated: Tue May 19 19:11:15 GMT-300 2020  
 Input format: org.apache.hadoop.hive.ql.io.parquet.MapredParquetInputFormat  
 Output format: org.apache.hadoop.hive.ql.io.parquet.MapredParquetOutputFormat  
 Serde serialization lib: org.apache.hadoop.hive.ql.io.parquet.serde.ParquetHiveSerDe  
 Serde parameters: serialization.format: 1

Table properties: compressionType: snappy, typeOfData: file

Schema				
	Column name	Data type	Partition key	Comment
1	id	bigint		
2	value	string		
3	date	date		
4	flag	boolean		

## Reading from Athena


```
[5]: wr.athena.read_sql_table(table="my_table", database="aws_sdk_pandas")
```

```
[5]:   id  value      date   flag
  0   3    bar  2020-01-03  True
  1   4    None  2020-01-04 False
  2   1    foo      None  <NA>
  3   2    boo      None  <NA>
```

## Cleaning Up

```
[6]: wr.s3.delete_objects(path)
wr.catalog.delete_table_if_exists(table="my_table", database="aws_sdk_pandas")
```

```
[6]: True
```



AWS SDK for pandas

## 1.8.15 15 - EMR

```
[1]: import awswrangler as wr
import boto3
```

Enter your bucket name:

```
[2]: import getpass
bucket = getpass.getpass()
```

```
.....
```

Enter your Subnet ID:

```
[8]: subnet = getpass.getpass()
```

```
.....
```

## Creating EMR Cluster

```
[9]: cluster_id = wr.emr.create_cluster(subnet)
```

## Uploading our PySpark script to Amazon S3

```
[10]: script = """
from pyspark.sql import SparkSession
spark = SparkSession.builder.appName("docker-awswrangler").getOrCreate()
sc = spark.sparkContext

print("Spark Initialized")
"""

_ = boto3.client("s3").put_object(
    Body=script,
    Bucket=bucket,
    Key="test.py"
)
```

## Submit PySpark step


```
[11]: step_id = wr.emr.submit_step(cluster_id, command=f"spark-submit s3://{{bucket}}/test.py")
```

## Wait Step

```
[12]: while wr.emr.get_step_state(cluster_id, step_id) != "COMPLETED":
    pass
```

## Terminate Cluster

```
[13]: wr.emr.terminate_cluster(cluster_id)
```



AWS SDK for pandas

## 1.8.16 16 - EMR & Docker

```
[ ]: import awswrangler as wr
import boto3
import getpass
```

Enter your bucket name:

```
[2]: bucket = getpass.getpass()
.....
```

Enter your Subnet ID:

```
[3]: subnet = getpass.getpass()
.....
```

### Build and Upload Docker Image to ECR repository

Replace the {ACCOUNT\_ID} placeholder.

```
[ ]: %%writefile Dockerfile

FROM amazoncorretto:8

RUN yum -y update
RUN yum -y install yum-utils
RUN yum -y groupinstall development

RUN yum list python3*
RUN yum -y install python3 python3-dev python3-pip python3-virtualenv

RUN python -V
RUN python3 -V

ENV PYSPARK_DRIVER_PYTHON python3
ENV PYSPARK_PYTHON python3

RUN pip3 install --upgrade pip
RUN pip3 install awswrangler

RUN python3 -c "import awswrangler as wr"
```

```
[ ]: %%bash

docker build -t 'local/emr-wrangler' .
aws ecr create-repository --repository-name emr-wrangler
docker tag local/emr-wrangler {ACCOUNT_ID}.dkr.ecr.us-east-1.amazonaws.com/emr-wrangler:
(continues on next page)
```

(continued from previous page)

```
↳ emr-wrangler
eval $(aws ecr get-login --region us-east-1 --no-include-email)
docker push {ACCOUNT_ID}.dkr.ecr.us-east-1.amazonaws.com/emr-wrangler:emr-wrangler
```

## Creating EMR Cluster

[4]: cluster\_id = wr.emr.create\_cluster(subnet, docker=True)

## Refresh ECR credentials in the cluster (expiration time: 12h )

[5]: wr.emr.submit\_ecr\_credentials\_refresh(cluster\_id, path=f"s3://{{bucket}}/")

[5]: 's-1B0045RWJL8CL'

## Uploading application script to Amazon S3 (PySpark)

```
[7]: script = """
from pyspark.sql import SparkSession
spark = SparkSession.builder.appName("docker-awswrangler").getOrCreate()
sc = spark.sparkContext

print("Spark Initialized")

import awswrangler as wr

print(f"awswrangler version: {{wr.__version__}}")
"""

boto3.client("s3").put_object(Body=script, Bucket=bucket, Key="test_docker.py")
```

## Submit PySpark step

```
[8]: DOCKER_IMAGE = f"{{wr.get_account_id()}}.dkr.ecr.us-east-1.amazonaws.com/emr-wrangler:emr-
      ↳wrangler"

step_id = wr.emr.submit_spark_step(
    cluster_id,
    f"s3://{{bucket}}/test_docker.py",
    docker_image=DOCKER_IMAGE
)
```

## Wait Step

```
[ ]: while wr.emr.get_step_state(cluster_id, step_id) != "COMPLETED":  
    pass
```

## Terminate Cluster

```
[ ]: wr.emr.terminate_cluster(cluster_id)
```

## Another example with custom configurations

```
[9]: cluster_id = wr.emr.create_cluster(  
    cluster_name="my-demo-cluster-v2",  
    logging_s3_path=f"s3://{bucket}/emr-logs/",  
    emr_release="emr-6.7.0",  
    subnet_id=subnet,  
    emr_ec2_role="EMR_EC2_DefaultRole",  
    emr_role="EMR_DefaultRole",  
    instance_type_master="m5.2xlarge",  
    instance_type_core="m5.2xlarge",  
    instance_ebs_size_master=50,  
    instance_ebs_size_core=50,  
    instance_num_on_demand_master=0,  
    instance_num_on_demand_core=0,  
    instance_num_spot_master=1,  
    instance_num_spot_core=2,  
    spot_bid_percentage_of_on_demand_master=100,  
    spot_bid_percentage_of_on_demand_core=100,  
    spot_provisioning_timeout_master=5,  
    spot_provisioning_timeout_core=5,  
    spot_timeout_to_on_demand_master=False,  
    spot_timeout_to_on_demand_core=False,  
    python3=True,  
    docker=True,  
    spark_glue_catalog=True,  
    hive_glue_catalog=True,  
    presto_glue_catalog=True,  
    debugging=True,  
    applications=["Hadoop", "Spark", "Hive", "Zeppelin", "Livy"],  
    visible_to_all_users=True,  
    maximize_resource_allocation=True,  
    keep_cluster_alive_when_no_steps=True,  
    termination_protected=False,  
    spark_pyarrow=True  
)  
  
wr.emr.submit_ecr_credentials_refresh(cluster_id, path=f"s3://{bucket}/emr/")  
  
DOCKER_IMAGE = f"{wr.get_account_id()}.dkr.ecr.us-east-1.amazonaws.com/emr-wrangler:emr-  
wrangler"
```


(continues on next page)

(continued from previous page)

```
step_id = wr.emr.submit_spark_step(
    cluster_id,
    f"s3://{bucket}/test_docker.py",
    docker_image=DOCKER_IMAGE
)
```

```
[ ]: while wr.emr.get_step_state(cluster_id, step_id) != "COMPLETED":
    pass

wr.emr.terminate_cluster(cluster_id)
```



AWS SDK for pandas

## 1.8.17 17 - Partition Projection

<https://docs.aws.amazon.com/athena/latest/ug/partition-projection.html>

```
[1]: import awswrangler as wr
import pandas as pd
from datetime import datetime
import getpass
```

Enter your bucket name:

```
[2]: bucket = getpass.getpass()
```

.....

### Integer projection

```
[3]: df = pd.DataFrame({
    "value": [1, 2, 3],
    "year": [2019, 2020, 2021],
    "month": [10, 11, 12],
    "day": [25, 26, 27]
})
```

(continues on next page)

(continued from previous page)

df

```
[3]: value year month day
0      1  2019    10   25
1      2  2020    11   26
2      3  2021    12   27
```

```
[4]: wr.s3.to_parquet(
        df=df,
        path=f"s3://[bucket]/table_integer/",
        dataset=True,
        partition_cols=["year", "month", "day"],
        database="default",
        table="table_integer",
        athena_partition_projection_settings={
            "projection_types": {
                "year": "integer",
                "month": "integer",
                "day": "integer"
            },
            "projection_ranges": {
                "year": "2000,2025",
                "month": "1,12",
                "day": "1,31"
            },
        },
    )
```

```
[5]: wr.athena.read_sql_query(f"SELECT * FROM table_integer", database="default")
```

```
[5]: value year month day
0      3  2021    12   27
1      2  2020    11   26
2      1  2019    10   25
```

## Enum projection

```
[6]: df = pd.DataFrame({
        "value": [1, 2, 3],
        "city": ["São Paulo", "Tokio", "Seattle"],
    })

df
[6]: value      city
0      1  São Paulo
1      2        Tokio
2      3     Seattle
```

```
[7]: wr.s3.to_parquet(
    df=df,
    path=f"s3://{bucket}/table_enum/",
    dataset=True,
    partition_cols=["city"],
    database="default",
    table="table_enum",
    athena_partition_projection_settings={
        "projection_types": {
            "city": "enum",
        },
        "projection_values": {
            "city": "São Paulo,Tokio,Seattle"
        },
    },
)
```

```
[8]: wr.athena.read_sql_query(f"SELECT * FROM table_enum", database="default")
```

	value	city
0	1	São Paulo
1	3	Seattle
2	2	Tokio

## Date projection

```
[9]: ts = lambda x: datetime.strptime(x, "%Y-%m-%d %H:%M:%S")
dt = lambda x: datetime.strptime(x, "%Y-%m-%d").date()

df = pd.DataFrame({
    "value": [1, 2, 3],
    "dt": [dt("2020-01-01"), dt("2020-01-02"), dt("2020-01-03")],
    "ts": [ts("2020-01-01 00:00:00"), ts("2020-01-01 00:00:01"), ts("2020-01-01 00:00:02
    ↵")],
})
df
```

	value	dt	ts
0	1	2020-01-01	2020-01-01 00:00:00
1	2	2020-01-02	2020-01-01 00:00:01
2	3	2020-01-03	2020-01-01 00:00:02

```
[10]: wr.s3.to_parquet(
    df=df,
    path=f"s3://{bucket}/table_date/",
    dataset=True,
    partition_cols=["dt", "ts"],
    database="default",
    table="table_date",
    athena_partition_projection_settings={
        "projection_types": {
```

(continues on next page)

(continued from previous page)

```
        "dt": "date",
        "ts": "date",
    },
    "projection_ranges": {
        "dt": "2020-01-01,2020-01-03",
        "ts": "2020-01-01 00:00:00,2020-01-01 00:00:02"
    },
},
)
```

```
[11]: wr.athena.read_sql_query(f"SELECT * FROM table_date", database="default")
```

```
[11]:   value          dt            ts
 0      1  2020-01-01 2020-01-01 00:00:00
 1      2  2020-01-02 2020-01-01 00:00:01
 2      3  2020-01-03 2020-01-01 00:00:02
```

## Injected projection

```
[12]: df = pd.DataFrame({
    "value": [1, 2, 3],
    "uuid": ["761e2488-a078-11ea-bb37-0242ac130002", "b89ed095-8179-4635-9537-
    ↪88592c0f6bc3", "87adc586-ce88-4f0a-b1c8-bf8e00d32249"],
})

df
```

```
[12]:   value                  uuid
 0      1  761e2488-a078-11ea-bb37-0242ac130002
 1      2  b89ed095-8179-4635-9537-88592c0f6bc3
 2      3  87adc586-ce88-4f0a-b1c8-bf8e00d32249
```

```
[13]: wr.s3.to_parquet(
    df=df,
    path=f"s3://{{bucket}}/table_injected/",
    dataset=True,
    partition_cols=["uuid"],
    database="default",
    table="table_injected",
    athena_partition_projection_settings={
        "projection_types": {
            "uuid": "injected",
        }
    },
)
```

```
[14]: wr.athena.read_sql_query(
    sql=f"SELECT * FROM table_injected WHERE uuid='b89ed095-8179-4635-9537-88592c0f6bc3'
    ↪",
    database="default"
)
```


```
[14]: value          uuid
0      2 b89ed095-8179-4635-9537-88592c0f6bc3
```

## Cleaning Up

```
[15]: wr.s3.delete_objects(f"s3://{bucket}/table_integer/")
wr.s3.delete_objects(f"s3://{bucket}/table_enum/")
wr.s3.delete_objects(f"s3://{bucket}/table_date/")
wr.s3.delete_objects(f"s3://{bucket}/table_injected/")
```

```
[16]: wr.catalog.delete_table_if_exists(table="table_integer", database="default")
wr.catalog.delete_table_if_exists(table="table_enum", database="default")
wr.catalog.delete_table_if_exists(table="table_date", database="default")
wr.catalog.delete_table_if_exists(table="table_injected", database="default")
```

```
[ ]:
```



AWS SDK for pandas

## 1.8.18 18 - QuickSight

For this tutorial we will use the public AWS COVID-19 data lake.

References:

- A public data lake for analysis of COVID-19 data
- Exploring the public AWS COVID-19 data lake
- CloudFormation template

*Please, install the CloudFormation template above to have access to the public data lake.*

*P.S. To be able to access the public data lake, you must allow explicitly QuickSight to access the related external bucket.*

```
[1]: import awswrangler as wr
from time import sleep
```

List users of QuickSight account

```
[2]: [{"username": user["UserName"], "role": user["Role"]} for user in wr.quicksight.list_
    ↵users('default')]
```

```
[2]: [{}'username': 'dev', 'role': 'ADMIN']]
```

```
[3]: wr.catalog.databases()
```

```
[3]:
```

	Database	Description
0	aws_sdk_pandas	AWS SDK for pandas Test Arena - Glue Database
1	awswrangler_test	
2	covid-19	
3	default	Default Hive database

```
[4]: wr.catalog.tables(database="covid-19")
```

```
[4]:
```

	Database	Table \
0	covid-19	alleninstitute_comprehend_medical
1	covid-19	alleninstitute_metadata
2	covid-19	country_codes
3	covid-19	county_populations
4	covid-19	covid_knowledge_graph_edges
5	covid-19	covid_knowledge_graph_nodes_author
6	covid-19	covid_knowledge_graph_nodes_concept
7	covid-19	covid_knowledge_graph_nodes_institution
8	covid-19	covid_knowledge_graph_nodes_paper
9	covid-19	covid_knowledge_graph_nodes_topic
10	covid-19	covid_testing_states_daily
11	covid-19	covid_testing_us_daily
12	covid-19	covid_testing_us_total
13	covid-19	covidcast_data
14	covid-19	covidcast_metadata
15	covid-19	enigma_jhu
16	covid-19	enigma_jhu_timeseries
17	covid-19	hospital_beds
18	covid-19	nytimes_counties
19	covid-19	nytimes_states
20	covid-19	prediction_models_county_predictions
21	covid-19	prediction_models_severity_index
22	covid-19	tableau_covid_datahub
23	covid-19	tableau_jhu
24	covid-19	us_state_abbreviations
25	covid-19	world_cases_deaths_testing

	Database	Description \
0	Comprehend Medical results run against Allen I...	
1	Metadata on papers pulled from the Allen Insti...	
2	Lookup table for country codes	
3	Lookup table for population for each county ba...	
4	AWS Knowledge Graph for COVID-19 data	
5	AWS Knowledge Graph for COVID-19 data	
6	AWS Knowledge Graph for COVID-19 data	
7	AWS Knowledge Graph for COVID-19 data	
8	AWS Knowledge Graph for COVID-19 data	
9	AWS Knowledge Graph for COVID-19 data	
10	USA total test daily trend by state. Sourced ...	
11	USA total test daily trend. Sourced from covi...	

(continues on next page)

(continued from previous page)

```

12 USA total tests. Sourced from covidtracking.c...
13           CMU Delphi's COVID-19 Surveillance Data
14           CMU Delphi's COVID-19 Surveillance Metadata
15 Johns Hopkins University Consolidated data on ...
16 Johns Hopkins University data on COVID-19 case...
17 Data on hospital beds and their utilization in...
18 Data on COVID-19 cases from NY Times at US cou...
19 Data on COVID-19 cases from NY Times at US sta...
20 County-level Predictions Data. Sourced from Yu...
21 Severity Index models. Sourced from Yu Group a...
22 COVID-19 data that has been gathered and unifi...
23 Johns Hopkins University data on COVID-19 case...
24           Lookup table for US state abbreviations
25 Data on confirmed cases, deaths, and testing. ...

```

	Columns	Partitions
0	paper_id, date, dx_name, test_name, procedure_...	
1	cord_uid, sha, source_x, title, doi, pmcid, pu...	
2	country, alpha-2 code, alpha-3 code, numeric c...	
3	id, id2, county, state, population estimate 2018	
4	id, label, from, to, score	
5	id, label, first, last, full_name	
6	id, label, entity, concept	
7	id, label, institution, country, settlement	
8	id, label, doi, sha_code, publish_time, source...	
9	id, label, topic, topic_num	
10	date, state, positive, negative, pending, hosp...	
11	date, states, positive, negative, posneg, pend...	
12	positive, negative, posneg, hospitalized, deat...	
13	data_source, signal, geo_type, time_value, geo...	
14	data_source, signal, time_type, geo_type, min_...	
15	fips, admin2, province_state, country_region, ...	
16	uid, fips, iso2, iso3, code3, admin2, latitude...	
17	objectid, hospital_name, hospital_type, hq_add...	
18	date, county, state, fips, cases, deaths	
19	date, state, fips, cases, deaths	
20	countyfips, countyname, statename, severity_co...	
21	severity_1-day, severity_2-day, severity_3-day...	
22	country_short_name, country_alpha_3_code, coun...	
23	case_type, cases, difference, date, country_re...	
24	state, abbreviation	
25	iso_code, location, date, total_cases, new_cas...	

Create data source of QuickSight Note: data source stores the connection information.

```
[5]: wr.quicksight.create_athena_data_source(
    name="covid-19",
    workgroup="primary",
    allowed_to_manage=["dev"]
)
```

```
[6]: wr.catalog.tables(database="covid-19", name_contains="nyt")
```

```
[6]: Database           Table \
0 covid-19    nytimes_counties
1 covid-19    nytimes_states

                                         Description \
0 Data on COVID-19 cases from NY Times at US cou...
1 Data on COVID-19 cases from NY Times at US sta...

                                         Columns Partitions
0 date, county, state, fips, cases, deaths
1             date, state, fips, cases, deaths
```

```
[7]: wr.athena.read_sql_query("SELECT * FROM nytimes_counties limit 10", database="covid-19",  
                           ctas_approach=False)
```

```
[7]:      date   county   state   fips   cases   deaths
0 2020-01-21 Snohomish Washington 53061     1     0
1 2020-01-22 Snohomish Washington 53061     1     0
2 2020-01-23 Snohomish Washington 53061     1     0
3 2020-01-24      Cook Illinois 17031     1     0
4 2020-01-24 Snohomish Washington 53061     1     0
5 2020-01-25     Orange California 06059     1     0
6 2020-01-25      Cook Illinois 17031     1     0
7 2020-01-25 Snohomish Washington 53061     1     0
8 2020-01-26 Maricopa   Arizona 04013     1     0
9 2020-01-26 Los Angeles California 06037     1     0
```

```
[8]: sql = """
SELECT
    j.*,
    co.Population,
    co.county AS county2,
    hb.*
FROM
(
    SELECT
        date,
        county,
        state,
        fips,
        cases as confirmed,
        deaths
    FROM "covid-19".nytimes_counties
) j
LEFT OUTER JOIN (
    SELECT
        DISTINCT county,
        state,
        "population estimate 2018" AS Population
    FROM
        "covid-19".county_populations
    WHERE
        state IN (
```

(continues on next page)

(continued from previous page)

```

SELECT
    DISTINCT state
FROM
    "covid-19".nytimes_counties
)
AND county IN (
    SELECT
        DISTINCT county as county
    FROM "covid-19".nytimes_counties
)
) co ON co.county = j.county
AND co.state = j.state
LEFT OUTER JOIN (
    SELECT
        count(objectid) as Hospital,
        fips as hospital_fips,
        sum(num_licensed_beds) as licensed_beds,
        sum(num_staffed_beds) as staffed_beds,
        sum(num_icu_beds) as icu_beds,
        avg(bed_utilization) as bed_utilization,
        sum(
            potential_increase_in_bed_capac
        ) as potential_increase_bed_capacity
    FROM "covid-19".hospital_beds
    WHERE
        fips in (
            SELECT
                DISTINCT fips
            FROM
                "covid-19".nytimes_counties
        )
    GROUP BY
        2
) hb ON hb.hospital_fips = j.fips
"""

```

```
wr.athena.read_sql_query(sql, database="covid-19", ctas_approach=False)
```

	date	county	state	fips	confirmed	deaths	population	\
0	2020-04-12	Park	Montana	30067	7	0	16736	
1	2020-04-12	Ravalli	Montana	30081	3	0	43172	
2	2020-04-12	Silver Bow	Montana	30093	11	0	34993	
3	2020-04-12	Clay	Nebraska	31035	2	0	6214	
4	2020-04-12	Cuming	Nebraska	31039	2	0	8940	
...	...	...	...	...	...	...	...	...
227684	2020-06-11	Hockley	Texas	48219	28	1	22980	
227685	2020-06-11	Hudspeth	Texas	48229	11	0	4795	
227686	2020-06-11	Jones	Texas	48253	633	0	19817	
227687	2020-06-11	La Salle	Texas	48283	4	0	7531	
227688	2020-06-11	Limestone	Texas	48293	36	1	23519	

```
county2 Hospital hospital_fips licensed_beds staffed_beds \
```

(continues on next page)

(continued from previous page)

0	Park	0	30067	25	25
1	Ravalli	0	30081	25	25
2	Silver Bow	0	30093	98	71
3	Clay	<NA>	<NA>	<NA>	<NA>
4	Cuming	0	31039	25	25
...	...	...	...	...	...
227684	Hockley	0	48219	48	48
227685	Hudspeth	<NA>	<NA>	<NA>	<NA>
227686	Jones	0	48253	45	7
227687	La Salle	<NA>	<NA>	<NA>	<NA>
227688	Limestone	0	48293	78	69
	icu_beds	bed_utilization	potential_increase_bed_capacity		
0	4	0.432548		0	
1	5	0.567781		0	
2	11	0.551457		27	
3	<NA>	NaN		<NA>	
4	4	0.204493		0	
...	...	...		...	
227684	8	0.120605		0	
227685	<NA>	NaN		<NA>	
227686	1	0.718591		38	
227687	<NA>	NaN		<NA>	
227688	9	0.163940		9	
 [227689 rows x 15 columns]					

Create Dataset with custom SQL option

```
[9]: wr.quicksight.create_athena_dataset(
    name="covid19-nytimes-usa",
    sql=sql,
    sql_name='CustomSQL',
    data_source_name="covid-19",
    import_mode='SPICE',
    allowed_to_manage=["dev"]
)
```

```
[10]: ingestion_id = wr.quicksight.create_ingestion("covid19-nytimes-usa")
```

Wait ingestion

```
[11]: while wr.quicksight.describe_ingestion(ingestion_id=ingestion_id, dataset_name="covid19-nytimes-usa")["IngestionStatus"] not in ["COMPLETED", "FAILED"]:
    sleep(1)
```

Describe last ingestion

```
[12]: wr.quicksight.describe_ingestion(ingestion_id=ingestion_id, dataset_name="covid19-nytimes-usa")["RowInfo"]
```

```
[12]: {'RowsIngested': 227689, 'RowsDropped': 0}
```

List all ingestions

```
[13]: [{"time": user["CreatedTime"], "source": user["RequestSource"]} for user in wr.  
       quicksight.list_ingestions("covid19-nytimes-usa")]
```


```
[13]: [{"time": datetime.datetime(2020, 6, 12, 15, 13, 46, 996000, tzinfo=tzlocal()),  
       'source': 'MANUAL'},  
     {"time": datetime.datetime(2020, 6, 12, 15, 13, 42, 344000, tzinfo=tzlocal()),  
       'source': 'MANUAL'}]
```

Create new dataset from a table directly

```
[14]: wr.quicksight.create_athena_dataset(  
        name="covid-19-tableau_jhu",  
        table="tableau_jhu",  
        data_source_name="covid-19",  
        database="covid-19",  
        import_mode='DIRECT_QUERY',  
        rename_columns={  
            "cases": "Count_of_Cases",  
            "combined_key": "County"  
        },  
        cast_columns_types={  
            "Count_of_Cases": "INTEGER"  
        },  
        tag_columns={  
            "combined_key": [{"ColumnGeographicRole": "COUNTY"}]  
        },  
        allowed_to_manage=["dev"]  
)
```

Cleaning up

```
[15]: wr.quicksight.delete_data_source("covid-19")  
wr.quicksight.delete_dataset("covid19-nytimes-usa")  
wr.quicksight.delete_dataset("covid-19-tableau_jhu")
```



AWS SDK for pandas

## 1.8.19 19 - Amazon Athena Cache

awswrangler has a cache strategy that is disabled by default and can be enabled by passing `max_cache_seconds` bigger than 0 as part of the `athena_cache_settings` parameter. This cache strategy for Amazon Athena can help you to **decrease query times and costs**.

When calling `read_sql_query`, instead of just running the query, we now can verify if the query has been run before. If so, and this last run was within `max_cache_seconds` (a new parameter to `read_sql_query`), we return the same results as last time if they are still available in S3. We have seen this increase performance more than 100x, but the potential is pretty much infinite.

The detailed approach is:

- When `read_sql_query` is called with `max_cache_seconds > 0` (it defaults to 0), we check for the last queries run by the same workgroup (the most we can get without pagination).
- By default it will check the last 50 queries, but you can customize it through the `max_cache_query_inspections` argument.
- We then sort those queries based on `CompletionDateTime`, descending
- For each of those queries, we check if their `CompletionDateTime` is still within the `max_cache_seconds` window. If so, we check if the query string is the same as now (with some smart heuristics to guarantee coverage over both `ctas_approaches`). If they are the same, we check if the last one's results are still on S3, and then return them instead of re-running the query.
- During the whole cache resolution phase, if there is anything wrong, the logic falls back to the usual `read_sql_query` path.

*P.S. The ``cache scope is bounded for the current workgroup``, so you will be able to reuse queries results from others colleagues running in the same environment.*

```
[1]: import awswrangler as wr
```

Enter your bucket name:

```
[2]: import getpass
bucket = getpass.getpass()
path = f"s3://{{bucket}}/data/"

.....
```

Checking/Creating Glue Catalog Databases

```
[3]: if "awswrangler_test" not in wr.catalog.databases().values:
    wr.catalog.create_database("awswrangler_test")
```

Creating a Parquet Table from the NOAA's CSV files

Reference

```
[4]: cols = ["id", "dt", "element", "value", "m_flag", "q_flag", "s_flag", "obs_time"]

df = wr.s3.read_csv(
    path="s3://noaa-ghcn-pds/csv/by_year/189",
    names=cols,
    parse_dates=["dt", "obs_time"]) # Read 10 files from the 1890 decade (~1GB)

df
```

```
[4]:
```

	id	dt	element	value	m_flag	q_flag	s_flag	obs_time
0	AGE00135039	1890-01-01	TMAX	160	NaN	NaN	E	NaN
1	AGE00135039	1890-01-01	TMIN	30	NaN	NaN	E	NaN
2	AGE00135039	1890-01-01	PRCP	45	NaN	NaN	E	NaN
3	AGE00147705	1890-01-01	TMAX	140	NaN	NaN	E	NaN
4	AGE00147705	1890-01-01	TMIN	74	NaN	NaN	E	NaN
...	...	...	...	...	...	...	...	...
29240014	UZM00038457	1899-12-31	PRCP	16	NaN	NaN	r	NaN
29240015	UZM00038457	1899-12-31	TAVG	-73	NaN	NaN	r	NaN
29240016	UZM00038618	1899-12-31	TMIN	-76	NaN	NaN	r	NaN
29240017	UZM00038618	1899-12-31	PRCP	0	NaN	NaN	r	NaN
29240018	UZM00038618	1899-12-31	TAVG	-60	NaN	NaN	r	NaN

[29240019 rows x 8 columns]

```
[5]: wr.s3.to_parquet(
    df=df,
    path=path,
    dataset=True,
    mode="overwrite",
    database="awswrangler_test",
    table="noaa"
)
```

```
[6]: wr.catalog.table(database="awswrangler_test", table="noaa")
```

```
[6]:
```

	Column	Name	Type	Partition	Comment
0		id	string		False
1		dt	timestamp		False
2		element	string		False
3		value	bigint		False
4		m_flag	string		False
5		q_flag	string		False
6		s_flag	string		False
7		obs_time	string		False

## The test query

The more computational resources the query needs, the more the cache will help you. That's why we're doing it using this long running query.

```
[7]: query = """
SELECT
    n1.element,
    count(1) as cnt
FROM
    noaa n1
JOIN
    noaa n2
ON
    n1.id = n2.id
GROUP BY
```

(continues on next page)

(continued from previous page)

```
n1.element  
.....
```

## First execution...

```
[8]: %%time  
  
wr.athena.read_sql_query(query, database="awswrangler_test")  
CPU times: user 5.31 s, sys: 232 ms, total: 5.54 s  
Wall time: 6min 42s  
  
[8]:  
      element      cnt  
0      WDMV    49755046  
1      SNWD    5089486328  
2      DATN    10817510  
3      DAPR    102579666  
4      MDTN    10817510  
5      WT03    71184687  
6      WT09    584412  
7      TOBS    146984266  
8      DASF    7764526  
9      WT04    9648963  
10     WT18    92635444  
11     WT01    87526136  
12     WT16    323354156  
13     PRCP    71238907298  
14     SNOW    21950890838  
15     WT06    307339  
16     TAVG    2340863803  
17     TMIN    41450979633  
18     MDTX    11210687  
19     WT07    4486872  
20     WT10    137873  
21     EVAP    970404  
22     WT14    8073701  
23     DATX    11210687  
24     WT08    33933005  
25     WT05    8211491  
26     TMAX    39876132467  
27     MDPR    114320989  
28     WT11    22212890  
29     DWPR    69005655  
30     MDSF    12004843
```

## Second execution with CACHE (400x faster)

```
[9]: %time

wr.athena.read_sql_query(query, database="awsrangler_test", max_cache_seconds=900)
CPU times: user 493 ms, sys: 34.9 ms, total: 528 ms
Wall time: 975 ms

[9]:   element      cnt
0    WDMV    49755046
1    SNWD    5089486328
2    DATN    10817510
3    DAPR    102579666
4    MDTN    10817510
5    WT03    71184687
6    WT09    584412
7    TOBS    146984266
8    DASF    7764526
9    WT04    9648963
10   WT18    92635444
11   WT01    87526136
12   WT16    323354156
13   PRCP    71238907298
14   SNOW    21950890838
15   WT06    307339
16   TAVG    2340863803
17   TMIN    41450979633
18   MDTX    11210687
19   WT07    4486872
20   WT10    137873
21   EVAP    970404
22   WT14    8073701
23   DATX    11210687
24   WT08    33933005
25   WT05    8211491
26   TMAX    39876132467
27   MDPR    114320989
28   WT11    22212890
29   DWPR    69005655
30   MDSF    12004843
```

Allowing awswrangler to inspect up to 500 historical queries to find same result to reuse.

```
[10]: %time

wr.athena.read_sql_query(query, database="awsrangler_test", athena_cache_settings={"max_
cache_seconds": 900, "max_cache_query_inspections": 500})
CPU times: user 504 ms, sys: 44 ms, total: 548 ms
Wall time: 1.19 s

[10]:   element      cnt
0    WDMV    49755046
```

(continues on next page)

(continued from previous page)

1	SNWD	5089486328
2	DATN	10817510
3	DAPR	102579666
4	MDTN	10817510
5	WT03	71184687
6	WT09	584412
7	TOBS	146984266
8	DASF	7764526
9	WT04	9648963
10	WT18	92635444
11	WT01	87526136
12	WT16	323354156
13	PRCP	71238907298
14	SNOW	21950890838
15	WT06	307339
16	TAVG	2340863803
17	TMIN	41450979633
18	MDTX	11210687
19	WT07	4486872
20	WT10	137873
21	EVAP	970404
22	WT14	8073701
23	DATX	11210687
24	WT08	33933005
25	WT05	8211491
26	TMAX	39876132467
27	MDPR	114320989
28	WT11	22212890
29	DWPR	69005655
30	MDSF	12004843

## Cleaning Up S3

```
[11]: wr.s3.delete_objects(path)
```


## Delete table

```
[12]: wr.catalog.delete_table_if_exists(database="aws Wrangler Test", table="noaa")
```

```
[12]: True
```

## Delete Database

```
[13]: wr.catalog.delete_database('awsrangler_test')
```



AWS SDK for pandas

## 1.8.20 20 - Spark Table Interoperability


awsrangler has no difficulty to insert, overwrite or do any other kind of interaction with a Table created by Apache Spark.

But if you want to do the opposite (Spark interacting with a table created by awsrmangler) you should be aware that awsrmangler follows the Hive's format and you must be explicit when using the Spark's saveAsTable method:

```
[ ]: spark_df.write.format("hive").saveAsTable("database.table")
```

Or just move forward using the insertInto alternative:

```
[ ]: spark_df.write.insertInto("database.table")
```



AWS SDK for pandas

## 1.8.21 21 - Global Configurations

awswrangler has two ways to set global configurations that will override the regular default arguments configured in functions signatures.

- **Environment variables**
- **wr.config**

*P.S. Check the function API doc to see if your function has some argument that can be configured through Global configurations.*

*P.P.S. One exception to the above mentioned rules is the ``botocore\_config`` property. It cannot be set through environment variables but only via ``wr.config``. It will be used as the ``botocore.config.Config`` for all underlying ``boto3`` calls. The default config is ``botocore.config.Config(retries={"max\_attempts": 5}, connect\_timeout=10, max\_pool\_connections=10)``. If you only want to change the retry behavior, you can use the environment variables ``AWS\_MAX\_ATTEMPTS`` and ``AWS\_RETRY\_MODE``. (see [Boto3 documentation](#))*

### Environment Variables

```
[1]: %env WR_DATABASE=default
%env WR_CTAS_APPROACH=False
%env WR_MAX_CACHE_SECONDS=900
%env WR_MAX_CACHE_QUERY_INSPECTIONS=500
%env WR_MAX_REMOTE_CACHE_ENTRIES=50
%env WR_MAX_LOCAL_CACHE_ENTRIES=100

env: WR_DATABASE=default
env: WR_CTAS_APPROACH=False
env: WR_MAX_CACHE_SECONDS=900
env: WR_MAX_CACHE_QUERY_INSPECTIONS=500
env: WR_MAX_REMOTE_CACHE_ENTRIES=50
env: WR_MAX_LOCAL_CACHE_ENTRIES=100
```

```
[2]: import awswrangler as wr
import botocore
```

```
[3]: wr.athena.read_sql_query("SELECT 1 AS FOO")
```

```
[3]:    foo
  0      1
```

### Resetting

```
[4]: # Specific
wr.config.reset("database")
# All
wr.config.reset()
```

**wr.config**

```
[5]: wr.config.database = "default"
wr.config.ctas_approach = False
wr.config.max_cache_seconds = 900
wr.config.max_cache_query_inspections = 500
wr.config.max_remote_cache_entries = 50
wr.config.max_local_cache_entries = 100
# Set botocore.config.Config that will be used for all boto3 calls
wr.config.botocore_config = botocore.config.Config(
    retries={"max_attempts": 10},
    connect_timeout=20,
    max_pool_connections=20
)
```


```
[6]: wr.athena.read_sql_query("SELECT 1 AS FOO")
```

```
[6]: foo
0    1
```

**Visualizing**

```
[7]: wr.config
[7]: <awsrangler._config._Config at 0x1376ece80>
```

```
[ ]:
```



AWS SDK for pandas

**1.8.22 22 - Writing Partitions Concurrently**

- concurrent\_partitioning argument:

If True will increase the parallelism level during the partitions writing. It will decrease the writing time and increase memory usage.

P.S. Check the function API doc to see it has some argument that can be configured through Global configurations.

```
[1]: %reload_ext memory_profiler  
  
import awswrangler as wr
```

Enter your bucket name:

```
[2]: import getpass  
bucket = getpass.getpass()  
path = f"s3://{{bucket}}/data/"  
  
.....
```

### Reading 4 GB of CSV from NOAA's historical data and creating a year column

```
[3]: noaa_path = "s3://noaa-ghcn-pds/csv/by_year/193"  
  
cols = ["id", "dt", "element", "value", "m_flag", "q_flag", "s_flag", "obs_time"]  
dates = ["dt", "obs_time"]  
dtype = {x: "category" for x in ["element", "m_flag", "q_flag", "s_flag"]}  
  
df = wr.s3.read_csv(noaa_path, names=cols, parse_dates=dates, dtype=dtype)  
  
df["year"] = df["dt"].dt.year  
  
print(f"Number of rows: {len(df.index)}")  
print(f"Number of columns: {len(df.columns)}")  
  
Number of rows: 125407761  
Number of columns: 9
```

### Default Writing


```
[4]: %%time  
%%memit  
  
wr.s3.to_parquet(  
    df=df,  
    path=path,  
    dataset=True,  
    mode="overwrite",  
    partition_cols=["year"],  
)  
  
peak memory: 22169.04 MiB, increment: 11119.68 MiB  
CPU times: user 49 s, sys: 12.5 s, total: 1min 1s  
Wall time: 1min 11s
```

### Concurrent Partitioning (Decreasing writing time, but increasing memory usage)

```
[5]: %%time
%%memit

wr.s3.to_parquet(
    df=df,
    path=path,
    dataset=True,
    mode="overwrite",
    partition_cols=["year"],
    concurrent_partitioning=True # <-----
)

peak memory: 27819.48 MiB, increment: 15743.30 MiB
CPU times: user 52.3 s, sys: 13.6 s, total: 1min 5s
Wall time: 41.6 s
```



AWS SDK for pandas

### 1.8.23 23 - Flexible Partitions Filter (PUSH-DOWN)

- partition\_filter argument:

- Callback Function filters to apply on PARTITION columns (PUSH-DOWN filter).
- This function MUST receive a single argument (Dict[str, str]) where keys are partitions names and values are partitions values.
- This function MUST return a bool, True to read the partition or False to ignore it.
- Ignored if `dataset=False`.

P.S. Check the function API doc to see it has some argument that can be configured through Global configurations.

```
[1]: import awswrangler as wr
import pandas as pd
```

Enter your bucket name:

```
[2]: import getpass  
bucket = getpass.getpass()  
path = f"s3://{{bucket}}/dataset/"  
.....
```

### Creating the Dataset (Parquet)

```
[3]: df = pd.DataFrame({  
    "id": [1, 2, 3],  
    "value": ["foo", "boo", "bar"],  
})  
  
wr.s3.to_parquet(  
    df=df,  
    path=path,  
    dataset=True,  
    mode="overwrite",  
    partition_cols=["value"]  
)  
  
wr.s3.read_parquet(path, dataset=True)  
[3]:   id value  
0    3    bar  
1    2    boo  
2    1    foo
```

### Parquet Example 1

```
[4]: my_filter = lambda x: x["value"].endswith("oo")  
  
wr.s3.read_parquet(path, dataset=True, partition_filter=my_filter)  
[4]:   id value  
0    2    boo  
1    1    foo
```

### Parquet Example 2

```
[5]: from Levenshtein import distance  
  
def my_filter(partitions):  
    return distance("boo", partitions["value"]) <= 1  
  
wr.s3.read_parquet(path, dataset=True, partition_filter=my_filter)
```

```
[5]:   id value
  0   2   boo
  1   1   foo
```

### Creating the Dataset (CSV)

```
[6]: df = pd.DataFrame({
    "id": [1, 2, 3],
    "value": ["foo", "boo", "bar"],
})

wr.s3.to_csv(
    df=df,
    path=path,
    dataset=True,
    mode="overwrite",
    partition_cols=["value"],
    compression="gzip",
    index=False
)

wr.s3.read_csv(path, dataset=True)
```

```
[6]:   id value
  0   3   bar
  1   2   boo
  2   1   foo
```

### CSV Example 1

```
[7]: my_filter = lambda x: x["value"].endswith("oo")

wr.s3.read_csv(path, dataset=True, partition_filter=my_filter)
```

```
[7]:   id value
  0   2   boo
  1   1   foo
```


### CSV Example 2

```
[8]: from Levenshtein import distance

def my_filter(partitions):
    return distance("boo", partitions["value"]) <= 1

wr.s3.read_csv(path, dataset=True, partition_filter=my_filter)
```

```
[8]:   id value
  0   2   boo
  1   1   foo
```



AWS SDK for pandas

### 1.8.24 24 - Athena Query Metadata

For `wr.athena.read_sql_query()` and `wr.athena.read_sql_table()` the resulting DataFrame (or every DataFrame in the returned Iterator for chunked queries) have a `query_metadata` attribute, which brings the query result metadata returned by Boto3/Athena.

The expected `query_metadata` format is the same returned by:

[https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/athena.html#Athena.Client.get\\_query\\_execution](https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/athena.html#Athena.Client.get_query_execution)

#### Environment Variables

```
[1]: %env WR_DATABASE=default
```

```
env: WR_DATABASE=default
```

```
[2]: import awswrangler as wr
```

```
[5]: df = wr.athena.read_sql_query("SELECT 1 AS foo")
```


```
df
```

```
[5]:   foo
  0   1
```

## Getting statistics from query metadata

```
[6]: print(f'DataScannedInBytes: {df.query_metadata["Statistics"][[{"DataScannedInBytes": 0}]]}')
print(f'TotalExecutionTimeInMillis: {df.query_metadata["Statistics"][[{"TotalExecutionTimeInMillis": 2311}]]}')
print(f'QueryQueueTimeInMillis: {df.query_metadata["Statistics"][[{"QueryQueueTimeInMillis": 121}]]}')
print(f'QueryPlanningTimeInMillis: {df.query_metadata["Statistics"][[{"QueryPlanningTimeInMillis": 250}]]}')
print(f'ServiceProcessingTimeInMillis: {df.query_metadata["Statistics"][[{"ServiceProcessingTimeInMillis": 37}]]}')

DataScannedInBytes: 0
TotalExecutionTimeInMillis: 2311
QueryQueueTimeInMillis: 121
QueryPlanningTimeInMillis: 250
ServiceProcessingTimeInMillis: 37
```



AWS SDK for pandas

## 1.8.25 25 - Redshift - Loading Parquet files with Spectrum

Enter your bucket name:

```
[ ]: # Install the optional modules first
!pip install 'awsrangler[redshift]'
```

```
[1]: import getpass
bucket = getpass.getpass()
PATH = f"s3://{{bucket}}/files/"
.....
```

### Mocking some Parquet Files on S3

```
[2]: import awswrangler as wr
import pandas as pd

df = pd.DataFrame({
    "col0": [0, 1, 2, 3, 4, 5, 6, 7, 8, 9],
    "col1": ["a", "b", "c", "d", "e", "f", "g", "h", "i", "j"],
})
df
```

```
[2]:   col0 col1
0      0    a
1      1    b
2      2    c
3      3    d
4      4    e
5      5    f
6      6    g
7      7    h
8      8    i
9      9    j
```

```
[3]: wr.s3.to_parquet(df, PATH, max_rows_by_file=2, dataset=True, mode="overwrite")
```

### Crawling the metadata and adding into Glue Catalog

```
[4]: wr.s3.store_parquet_metadata(
    path=PATH,
    database="aws_sdk_pandas",
    table="test",
    dataset=True,
    mode="overwrite"
)
[4]: ({'col0': 'bigint', 'col1': 'string'}, None, None)
```

### Running the CTAS query to load the data into Redshift storage

```
[5]: con = wr.redshift.connect(connection="aws-sdk-pandas-redshift")
[6]: query = "CREATE TABLE public.test AS (SELECT * FROM aws_sdk_pandas_external.test)"
[7]: with con.cursor() as cursor:
    cursor.execute(query)
```

### Running an `INSERT INTO` query to load MORE data into Redshift storage

```
[8]: df = pd.DataFrame({
    "col0": [10, 11],
    "col1": ["k", "l"],
})
wr.s3.to_parquet(df, PATH, dataset=True, mode="overwrite")
```

```
[9]: query = "INSERT INTO public.test (SELECT * FROM aws_sdk_pandas_external.test)"
```

```
[10]: with con.cursor() as cursor:
        cursor.execute(query)
```


### Checking the result

```
[11]: query = "SELECT * FROM public.test"
```

```
[13]: wr.redshift.read_sql_table(con=con, schema="public", table="test")
```

```
[13]:   col0  col1
 0      5    f
 1      1    b
 2      3    d
 3      6    g
 4      8    i
 5     10    k
 6      4    e
 7      0    a
 8      2    c
 9      7    h
10      9    j
11     11    l
```

```
[14]: con.close()
```



AWS SDK for pandas

## 1.8.26 26 - Amazon Timestream

### Creating resources

```
[10]: import awswrangler as wr
import pandas as pd
from datetime import datetime

wr.timestream.create_database("sampleDB")
wr.timestream.create_table("sampleDB", "sampleTable", memory_retention_hours=1, magnetic_
                           retention_days=1)
```

### Write

```
[11]: df = pd.DataFrame(
    {
        "time": [datetime.now(), datetime.now(), datetime.now()],
        "dim0": ["foo", "boo", "bar"],
        "dim1": [1, 2, 3],
        "measure": [1.0, 1.1, 1.2],
    }
)

rejected_records = wr.timestream.write(
    df=df,
    database="sampleDB",
    table="sampleTable",
    time_col="time",
    measure_col="measure",
    dimensions_cols=["dim0", "dim1"],
)
print(f"Number of rejected records: {len(rejected_records)})")
```

Number of rejected records: 0


### Query

```
[12]: wr.timestream.query(
    'SELECT time, measure_value::double, dim0, dim1 FROM "sampleDB"."sampleTable" ORDER_
     BY time DESC LIMIT 3'
)

[12]:          time  measure_value::double dim0 dim1
0 2020-12-08 19:15:32.468                  1.0   foo    1
1 2020-12-08 19:15:32.468                  1.2   bar    3
2 2020-12-08 19:15:32.468                  1.1   boo    2
```

## Deleting resources

```
[13]: wr.timestream.delete_table("sampleDB", "sampleTable")
wr.timestream.delete_database("sampleDB")
```



AWS SDK for pandas

## 1.8.27 27 - Amazon Timestream - Example 2

### Reading test data

```
[1]: import awswrangler as wr
import pandas as pd
from datetime import datetime

df = pd.read_csv(
    "https://raw.githubusercontent.com/aws/amazon-timestream-tools/master/sample_apps/
data/sample.csv",
    names=[
        "ignore0",
        "region",
        "ignore1",
        "az",
        "ignore2",
        "hostname",
        "measure_kind",
        "measure",
        "ignore3",
        "ignore4",
        "ignore5",
    ],
    usecols=["region", "az", "hostname", "measure_kind", "measure"],
)
df["time"] = datetime.now()
df.reset_index(inplace=True, drop=False)

df
```

	index	region	az	hostname	measure_kind	\
0	0	us-east-1	us-east-1a	host-fj2hx	cpu_utilization	
1	1	us-east-1	us-east-1a	host-fj2hx	memory_utilization	

(continues on next page)

(continued from previous page)

```

2          2 us-east-1   us-east-1a host-6kMPE    cpu_utilization
3          3 us-east-1   us-east-1a host-6kMPE    memory_utilization
4          4 us-east-1   us-east-1a host-sxj7X    cpu_utilization
...
...       ...
125995  125995 eu-north-1 eu-north-1c host-De8RB  memory_utilization
125996  125996 eu-north-1 eu-north-1c host-2z8tn  memory_utilization
125997  125997 eu-north-1 eu-north-1c host-2z8tn  cpu_utilization
125998  125998 eu-north-1 eu-north-1c host-9FcwW  memory_utilization
125999  125999 eu-north-1 eu-north-1c host-9FcwW  cpu_utilization

      measure                  time
0    21.394363 2020-12-08 16:18:47.599597
1    68.563420 2020-12-08 16:18:47.599597
2    17.144579 2020-12-08 16:18:47.599597
3    73.507870 2020-12-08 16:18:47.599597
4    26.584865 2020-12-08 16:18:47.599597
...
...       ...
125995  68.063468 2020-12-08 16:18:47.599597
125996  72.203680 2020-12-08 16:18:47.599597
125997  29.212219 2020-12-08 16:18:47.599597
125998  71.746134 2020-12-08 16:18:47.599597
125999  1.677793 2020-12-08 16:18:47.599597

[126000 rows x 7 columns]

```

## Creating resources

```
[2]: wr.timestream.create_database("sampleDB")
wr.timestream.create_table("sampleDB", "sampleTable", memory_retention_hours=1, magnetic_
                           retention_days=1)
```

## Write CPU\_UTILIZATION records

```
[3]: df_cpu = df[df.measure_kind == "cpu_utilization"].copy()
df_cpu.rename(columns={"measure": "cpu_utilization"}, inplace=True)
df_cpu
```

```

      index     region         az   hostname  measure_kind \
0          0 us-east-1  us-east-1a  host-fj2hx  cpu_utilization
2          2 us-east-1  us-east-1a  host-6kMPE  cpu_utilization
4          4 us-east-1  us-east-1a  host-sxj7X  cpu_utilization
6          6 us-east-1  us-east-1a  host-ExOui  cpu_utilization
8          8 us-east-1  us-east-1a  host-Bwb3j  cpu_utilization
...
...       ...
125990 125990 eu-north-1 eu-north-1c host-aPtc6  cpu_utilization
125992 125992 eu-north-1 eu-north-1c host-7ZF9L  cpu_utilization
125994 125994 eu-north-1 eu-north-1c host-De8RB  cpu_utilization
125997 125997 eu-north-1 eu-north-1c host-2z8tn  cpu_utilization
125999 125999 eu-north-1 eu-north-1c host-9FcwW  cpu_utilization

```

(continues on next page)

(continued from previous page)

```

cpu_utilization           time
0            21.394363 2020-12-08 16:18:47.599597
2            17.144579 2020-12-08 16:18:47.599597
4            26.584865 2020-12-08 16:18:47.599597
6            52.930970 2020-12-08 16:18:47.599597
8            99.134110 2020-12-08 16:18:47.599597
...
125990        ...
125992        ...
125994        ...
125997        ...
125999        ...

[63000 rows x 7 columns]

```

```
[4]: rejected_records = wr.timestream.write(
    df=df_cpu,
    database="sampleDB",
    table="sampleTable",
    time_col="time",
    measure_col="cpu_utilization",
    dimensions_cols=["index", "region", "az", "hostname"],
)

assert len(rejected_records) == 0
```

## Write MEMORY\_UTILIZATION records

```
[5]: df_memory = df[df.measure_kind == "memory_utilization"].copy()
df_memory.rename(columns={"measure": "memory_utilization"}, inplace=True)

df_memory

```

	index	region	az	hostname	measure_kind	\
1	1	us-east-1	us-east-1a	host-fj2hx	memory_utilization	
3	3	us-east-1	us-east-1a	host-6kMPE	memory_utilization	
5	5	us-east-1	us-east-1a	host-sxj7X	memory_utilization	
7	7	us-east-1	us-east-1a	host-ExOui	memory_utilization	
9	9	us-east-1	us-east-1a	host-Bwb3j	memory_utilization	
...	...	...	...	...	...	...
125991	125991	eu-north-1	eu-north-1c	host-aPtc6	memory_utilization	
125993	125993	eu-north-1	eu-north-1c	host-7ZF9L	memory_utilization	
125995	125995	eu-north-1	eu-north-1c	host-De8RB	memory_utilization	
125996	125996	eu-north-1	eu-north-1c	host-2z8tn	memory_utilization	
125998	125998	eu-north-1	eu-north-1c	host-9FcZW	memory_utilization	

	memory_utilization	time
1	68.563420	2020-12-08 16:18:47.599597
3	73.507870	2020-12-08 16:18:47.599597
5	22.401424	2020-12-08 16:18:47.599597

(continues on next page)

(continued from previous page)

```

7          45.440135 2020-12-08 16:18:47.599597
9          15.042701 2020-12-08 16:18:47.599597
...
125991      ...
125993      ...
125995      ...
125996      ...
125998      ...

[63000 rows x 7 columns]

```

```
[6]: rejected_records = wr.timestream.write(
    df=df_memory,
    database="sampleDB",
    table="sampleTable",
    time_col="time",
    measure_col="memory_utilization",
    dimensions_cols=["index", "region", "az", "hostname"],
)

assert len(rejected_records) == 0
```

## Querying CPU\_UTILIZATION

```
[7]: wr.timestream.query("""
    SELECT
        hostname, region, az, measure_name, measure_value::double, time
    FROM "sampleDB"."sampleTable"
    WHERE measure_name = 'cpu_utilization'
    ORDER BY time DESC
    LIMIT 10
""")
```

	hostname	region	az	measure_name	\
0	host-0gvFx	us-west-1	us-west-1a	cpu_utilization	
1	host-rZUNx	eu-north-1	eu-north-1a	cpu_utilization	
2	host-t1kAB	us-east-2	us-east-2b	cpu_utilization	
3	host-RdQRf	us-east-1	us-east-1c	cpu_utilization	
4	host-4Llhu	us-east-1	us-east-1c	cpu_utilization	
5	host-2plqa	us-west-1	us-west-1a	cpu_utilization	
6	host-J3Q4z	us-east-1	us-east-1b	cpu_utilization	
7	host-VIR5T	ap-east-1	ap-east-1a	cpu_utilization	
8	host-G042D	us-east-1	us-east-1c	cpu_utilization	
9	host-8EBHm	us-west-2	us-west-2c	cpu_utilization	

	measure_value::double	time
0	39.617911	2020-12-08 19:18:47.600
1	30.793332	2020-12-08 19:18:47.600
2	74.453239	2020-12-08 19:18:47.600
3	76.984448	2020-12-08 19:18:47.600
4	41.862733	2020-12-08 19:18:47.600

(continues on next page)

(continued from previous page)

5	34.864762	2020-12-08	19:18:47.600
6	71.574266	2020-12-08	19:18:47.600
7	14.017491	2020-12-08	19:18:47.600
8	60.199068	2020-12-08	19:18:47.600
9	96.631624	2020-12-08	19:18:47.600

## Querying MEMORY\_UTILIZATION

```
[8]: wr.timestream.query("""
    SELECT
        hostname, region, az, measure_name, measure_value::double, time
    FROM "sampleDB"."sampleTable"
    WHERE measure_name = 'memory_utilization'
    ORDER BY time DESC
    LIMIT 10
""")
```


	hostname	region	az	measure_name	\
0	host-7c897	us-west-2	us-west-2b	memory_utilization	
1	host-2z8tn	eu-north-1	eu-north-1c	memory_utilization	
2	host-J3Q4z	us-east-1	us-east-1b	memory_utilization	
3	host-mjrQb	us-east-1	us-east-1b	memory_utilization	
4	host-AyWSI	us-east-1	us-east-1c	memory_utilization	
5	host-Axf0g	us-west-2	us-west-2a	memory_utilization	
6	host-ilMBa	us-east-2	us-east-2b	memory_utilization	
7	host-CWdXX	us-west-2	us-west-2c	memory_utilization	
8	host-8EBHm	us-west-2	us-west-2c	memory_utilization	
9	host-dRIJj	us-east-1	us-east-1c	memory_utilization	

	measure_value::double	time
0	63.427726	2020-12-08 19:18:47.600
1	41.071368	2020-12-08 19:18:47.600
2	23.944388	2020-12-08 19:18:47.600
3	69.173431	2020-12-08 19:18:47.600
4	75.591467	2020-12-08 19:18:47.600
5	29.720739	2020-12-08 19:18:47.600
6	71.544134	2020-12-08 19:18:47.600
7	79.792799	2020-12-08 19:18:47.600
8	66.082554	2020-12-08 19:18:47.600
9	86.748960	2020-12-08 19:18:47.600

## Deleting resources

```
[9]: wr.timestream.delete_table("sampleDB", "sampleTable")
wr.timestream.delete_database("sampleDB")
```



AWS SDK for pandas

## 1.8.28 28 - Amazon DynamoDB

### Writing Data

```
[23]: from datetime import datetime
from decimal import Decimal
from pathlib import Path

import awswrangler as wr
import pandas as pd
from boto3.dynamodb.conditions import Attr, Key
```

### Writing DataFrame

```
[27]: table_name = "movies"

df = pd.DataFrame({
    "title": ["Titanic", "Snatch", "The Godfather"],
    "year": [1997, 2000, 1972],
    "genre": ["drama", "caper story", "crime"],
})
wr.dynamodb.put_df(df=df, table_name=table_name)
```

## Writing CSV file

```
[3]: filepath = Path("items.csv")
df.to_csv(filepath, index=False)
wr.dynamodb.put_csv(path=filepath, table_name=table_name)
filepath.unlink()
```

## Writing JSON files

```
[4]: filepath = Path("items.json")
df.to_json(filepath, orient="records")
wr.dynamodb.put_json(path="items.json", table_name=table_name)
filepath.unlink()
```

## Writing list of items

```
[5]: items = df.to_dict(orient="records")
wr.dynamodb.put_items(items=items, table_name=table_name)
```

## Reading Data

### Read Items

```
[ ]: # Limit Read to 5 items
wr.dynamodb.read_items(table_name=table_name, max_items_evaluated=5)

# Limit Read to Key expression
wr.dynamodb.read_items(
    table_name=table_name,
    key_condition_expression=(Key("title").eq("Snatch") & Key("year").eq(2000))
)
```

### Read PartiQL


```
[29]: wr.dynamodb.read_partiql_query(
    query=f"SELECT * FROM {table_name} WHERE title=? AND year=?",
    parameters=["Snatch", 2000],
)
[29]:   year      genre     title
  0  2000  caper story  Snatch
```

## Executing statements

```
[29]: title = "The Lord of the Rings: The Fellowship of the Ring"
year = datetime.now().year
genre = "epic"
rating = Decimal('9.9')
plot = "The fate of Middle-earth hangs in the balance as Frodo and eight companions begin their journey to Mount Doom in the land of Mordor."
# Insert items
wr.dynamodb.execute_statement(
    statement=f"INSERT INTO {table_name} VALUE {{'title': ?, 'year': ?, 'genre': ?, 'info': ?}}",
    parameters=[title, year, genre, {"plot": plot, "rating": rating}],
)
# Select items
wr.dynamodb.execute_statement(
    statement=f"SELECT * FROM \\"{table_name}\\" WHERE title=? AND year=?",
    parameters=[title, year],
)
# Update items
wr.dynamodb.execute_statement(
    statement=f"UPDATE \\"{table_name}\\" SET info.rating=? WHERE title=? AND year=?",
    parameters=[Decimal(10), title, year],
)
# Delete items
wr.dynamodb.execute_statement(
    statement=f"DELETE FROM \\"{table_name}\\" WHERE title=? AND year=?",
    parameters=[title, year],
)
[29]: []
```

## Deleting items

```
[6]: wr.dynamodb.delete_items(items=items, table_name="table")
```



AWS SDK for pandas

## 1.8.29 29 - S3 Select

AWS SDK for pandas supports [Amazon S3 Select](#), enabling applications to use SQL statements in order to query and filter the contents of a single S3 object. It works on objects stored in CSV, JSON or Apache Parquet, including compressed and large files of several TBs.

With S3 Select, the query workload is delegated to Amazon S3, leading to lower latency and cost, and to higher performance (up to 400% improvement). This is in comparison with other awswrangler operations such as `read_parquet` where the S3 object is downloaded and filtered on the client-side.

This feature has a number of limitations however:

- The maximum length of a record in the input or result is 1 MB
- The maximum uncompressed row group size is 256 MB (Parquet only)
- It can only emit nested data in JSON format
- Certain SQL operations are not supported (e.g. ORDER BY)

### Read multiple Parquet files from an S3 prefix

```
[1]: import awswrangler as wr

df = wr.s3.select_query(
    sql="SELECT * FROM s3object s where s.\"star_rating\" >= 5",
    path="s3://amazon-reviews-pds/parquet/product_category=Gift_Card/",
    input_serialization="Parquet",
    input_serialization_params={},
)
df.loc[:, df.columns != "product_title"].head()

[1]:   marketplace customer_id      review_id product_id product_parent \
0          US      52670295  RGPOFKORD8RTU  B0002CZPPG      867256265
1          US      29964102  R2U8X8V5KPB4J3  B00H5BMF00      373287760
2          US      25173351  R15XV3LXUMLTXL  B00PG40C04      137115061
3          US      12516181  R3G6G7H8TX4H0T  B0002CZPPG      867256265
4          US      38355314  R2NJ7WNBU16YTQ  B00B2TFS06      89375983

      star_rating  helpful_votes  total_votes vine verified_purchase \
0            5          105         107      N             N
1            5            0           0      N             Y
2            5            0           0      N             Y
3            5            6           6      N             N
4            5            0           0      N             Y

      review_headline                                review_body \
0  Excellent Gift Idea  I wonder if the other reviewer actually read t...
1        Five Stars  convenience is the name of the game.
2  Birthday Gift  This gift card was handled with accuracy in de...
3        Love 'em.  Gotta love these iTunes Prepaid Card thingys. ...
4        Five Stars                               perfect

  review_date  year
0  2005-02-08  2005
1  2015-05-03  2015
```

(continues on next page)

(continued from previous page)

```
2 2015-05-03 2015
3 2005-10-15 2005
4 2015-05-03 2015
```

## Read full CSV file

```
[5]: df = wr.s3.select_query(
    sql="SELECT * FROM s3object",
    path="s3://humor-detection-pds/Humorous.csv",
    input_serialization="CSV",
    input_serialization_params={
        "FileHeaderInfo": "Use",
        "RecordDelimiter": "\r\n",
    },
    scan_range_chunk_size=1024*1024*32, # override range of bytes to query, by default ↵
→ 1Mb
    use_threads=True,
)
df.head()

[5]: question \
0 Will the volca sample get me a girlfriend?
1 Can u communicate with spirits even on Saturday?
2 I won't get hunted right?
3 I have a few questions.. Can you get possessed...
4 Has anyone asked where the treasure is? What w...

product_description \
0 Korg Amplifier Part VOLCASAMPLE
1 Winning Moves Games Classic Ouija
2 Winning Moves Games Classic Ouija
3 Winning Moves Games Classic Ouija
4 Winning Moves Games Classic Ouija

image_url label
0 http://ecx.images-amazon.com/images/I/81I1XZea... 1
1 http://ecx.images-amazon.com/images/I/81kcYEG5... 1
2 http://ecx.images-amazon.com/images/I/81kcYEG5... 1
3 http://ecx.images-amazon.com/images/I/81kcYEG5... 1
4 http://ecx.images-amazon.com/images/I/81kcYEG5... 1
```

## Filter JSON file

```
[3]: wr.s3.select_query(
    sql="SELECT * FROM s3object[*] s where s.\"family_name\" = \'Biden\'",
    path="s3://awsglue-datasets/examples/us-legislators/all/persons.json",
    input_serialization="JSON",
    input_serialization_params={
        "Type": "Document",
    },
)
[3]: family_name                               contact_details           name \
0      Biden   [ {'type': 'twitter', 'value': 'joebiden'}]  Joseph Biden, Jr.

                                         links gender \
0  [{ 'note': 'Wikipedia (ace)', 'url': 'https://a...  male


                                         image \
0  https://theunitedstates.io/images/congress/ori...

                                         identifiers \
0  [{ 'identifier': 'B000444', 'scheme': 'bioguide...  ...

                                         other_names      sort_name \
0  [{ 'lang': None, 'name': 'Joe Biden', 'note': '... Biden, Joseph

                                         images given_name birth_date \
0  [{ 'url': 'https://theunitedstates.io/images/co...  Joseph 1942-11-20

                                         id
0  64239edf-8e06-4d2d-acc0-33d96bc79774
```



AWS SDK for pandas

## 1.8.30 30 - Data Api

The Data API simplifies access to Amazon Redshift and RDS by removing the need to manage database connections and credentials. Instead, you can execute SQL commands to an Amazon Redshift cluster or Amazon Aurora cluster by simply invoking an HTTPS API endpoint provided by the Data API. It takes care of managing database connections and returning data. Since the Data API leverages IAM user credentials or database credentials stored in AWS Secrets Manager, you don't need to pass credentials in API calls.

### Connect to the cluster

- `wr.data_api.redshift.connect()`
- `wr.data_api.rds.connect()`

```
[ ]: con_redshift = wr.data_api.redshift.connect(
    cluster_id="aws-sdk-pandas-1xn5lqxrdxrv3",
    database="test_redshift",
    secret_arn="arn:aws:secretsmanager:us-east-1:111111111111:secret:aws-sdk-pandas/
    ↪redshift-ewn43d"
)

con_redshift_serverless = wr.data_api.redshift.connect(
    workgroup_name="aws-sdk-pandas",
    database="test_redshift",
    secret_arn="arn:aws:secretsmanager:us-east-1:111111111111:secret:aws-sdk-pandas/
    ↪redshift-f3en4w"
)


con_mysql = wr.data_api.rds.connect(
    resource_arn="arn:aws:rds:us-east-1:111111111111:cluster:mysql-serverless-cluster-
    ↪wrangler",
    database="test_rds",
    secret_arn="arn:aws:secretsmanager:us-east-1:111111111111:secret:aws-sdk-pandas/
    ↪mysql-23df3"
)
```

### Read from database

- `wr.data_api.redshift.read_sql_query()`
- `wr.data_api.rds.read_sql_query()`

```
[ ]: df = wr.data_api.redshift.read_sql_query(
    sql="SELECT * FROM public.test_table",
    con=con_redshift,
)

df = wr.data_api.rds.read_sql_query(
    sql="SELECT * FROM test.test_table",
    con=con_rds,
)
```



AWS SDK for pandas

## 1.8.31 31 - OpenSearch

### Table of Contents

- 1. *Initialize*
  - Connect to your Amazon OpenSearch domain
  - Enter your bucket name
  - Initialize sample data
- 2. *Indexing (load)*
  - Index documents (no Pandas)
  - Index json file
  - Index CSV
- 3. *Search*
  - 3.1 Search by DSL
  - 3.2 Search by SQL
- 4. *Delete Indices*
- 5. *Bonus - Prepare data and index from DataFrame*
  - Prepare the data for indexing
  - Create index with mapping
  - Index dataframe
  - Execute geo query

## 1. Initialize

```
[ ]: # Install the optional modules first  
!pip install 'awswrangler[opensearch]'
```

```
[1]: import awswrangler as wr
```

### Connect to your Amazon OpenSearch domain

```
[2]: client = wr.opensearch.connect(  
    host='OPENSEARCH-ENDPOINT',  
    #     username='FGAC-USERNAME(OPTIONAL)',  
    #     password='FGAC-PASSWORD(OPTIONAL)'  
)  
client.info()
```

### Enter your bucket name

```
[3]: bucket = 'BUCKET'
```

### Initialize sample data

```
[4]: sf_restaurants_inspections = [  
    {  
        "inspection_id": "24936_20160609",  
        "business_address": "315 California St",  
        "business_city": "San Francisco",  
        "business_id": "24936",  
        "business_location": {"lon": -122.400152, "lat": 37.793199},  
        "business_name": "San Francisco Soup Company",  
        "business_postal_code": "94104",  
        "business_state": "CA",  
        "inspection_date": "2016-06-09T00:00:00.000",  
        "inspection_score": 77,  
        "inspection_type": "Routine - Unscheduled",  
        "risk_category": "Low Risk",  
        "violation_description": "Improper food labeling or menu misrepresentation",  
        "violation_id": "24936_20160609_103141",  
    },  
    {  
        "inspection_id": "60354_20161123",  
        "business_address": "10 Mason St",  
        "business_city": "San Francisco",  
        "business_id": "60354",  
        "business_location": {"lon": -122.409061, "lat": 37.783527},  
        "business_name": "Soup Unlimited",  
        "business_postal_code": "94102",  
    }]
```

(continues on next page)

(continued from previous page)

```

"business_state": "CA",
"inspection_date": "2016-11-23T00:00:00.000",
"inspection_type": "Routine",
"inspection_score": 95,
},
{
"inspection_id": "1797_20160705",
"business_address": "2872 24th St",
"business_city": "San Francisco",
"business_id": "1797",
"business_location": {"lon": -122.409752, "lat": 37.752807},
"business_name": "TIO CHILOS GRILL",
"business_postal_code": "94110",
"business_state": "CA",
"inspection_date": "2016-07-05T00:00:00.000",
"inspection_score": 90,
"inspection_type": "Routine - Unscheduled",
"risk_category": "Low Risk",
"violation_description": "Unclean nonfood contact surfaces",
"violation_id": "1797_20160705_103142",
},
{
"inspection_id": "66198_20160527",
"business_address": "1661 Tennessee St Suite 3B",
"business_city": "San Francisco Whard Restaurant",
"business_id": "66198",
"business_location": {"lon": -122.388478, "lat": 37.75072},
"business_name": "San Francisco Restaurant",
"business_postal_code": "94107",
"business_state": "CA",
"inspection_date": "2016-05-27T00:00:00.000",
"inspection_type": "Routine",
"inspection_score": 56,
},
{
"inspection_id": "5794_20160907",
"business_address": "2162 24th Ave",
"business_city": "San Francisco",
"business_id": "5794",
"business_location": {"lon": -122.481299, "lat": 37.747228},
"business_name": "Soup House",
"business_phone_number": "+14155752700",
"business_postal_code": "94116",
"business_state": "CA",
"inspection_date": "2016-09-07T00:00:00.000",
"inspection_score": 96,
"inspection_type": "Routine - Unscheduled",
"risk_category": "Low Risk",
"violation_description": "Unapproved or unmaintained equipment or utensils",
"violation_id": "5794_20160907_103144",
}
,
```

(continues on next page)

(continued from previous page)

```
# duplicate record
{
    "inspection_id": "5794_20160907",
    "business_address": "2162 24th Ave",
    "business_city": "San Francisco",
    "business_id": "5794",
    "business_location": {"lon": -122.481299, "lat": 37.747228},
    "business_name": "Soup-or-Salad",
    "business_phone_number": "+14155752700",
    "business_postal_code": "94116",
    "business_state": "CA",
    "inspection_date": "2016-09-07T00:00:00.000",
    "inspection_score": 96,
    "inspection_type": "Routine - Unscheduled",
    "risk_category": "Low Risk",
    "violation_description": "Unapproved or unmaintained equipment or utensils",
    "violation_id": "5794_20160907_103144",
}
]
```

## 2. Indexing (load)

### Index documents (no Pandas)

```
[5]: # index documents w/o providing keys (_id is auto-generated)
wr.opensearch.index_documents(
    client,
    documents=sf_restaurants_inspections,
    index="sf_restaurants_inspections"
)
Indexing: 100% (6/6) | #####| Elapsed Time: 0:00:01
```

[5]: {'success': 6, 'errors': []}

```
[6]: # read all documents. There are total 6 documents
wr.opensearch.search(
    client,
    index="sf_restaurants_inspections",
    _source=["inspection_id", "business_name", "business_location"]
)
[6]:          _id          business_name \
0  663dd72d-0da4-495b-b0ae-ed000105ae73      TIO CHILOS GRILL
1  ff2f50f6-5415-4706-9bcb-af7c5eb0afa3      Soup House
2  b9e8f6a2-8fd1-4660-b041-2997a1a80984  San Francisco Soup Company
3  56b352e6-102b-4eff-8296-7e1fb2459bab      Soup Unlimited
4  6fec5411-f79a-48e4-be7b-e0e44d5ebab  San Francisco Restaurant
5  7ba4fb17-f9a9-49da-b90e-8b3553d6d97c      Soup-or-Salad
           inspection_id  business_location.lon  business_location.lat
```

(continues on next page)

(continued from previous page)

0	1797_20160705	-122.409752	37.752807
1	5794_20160907	-122.481299	37.747228
2	24936_20160609	-122.400152	37.793199
3	60354_20161123	-122.409061	37.783527
4	66198_20160527	-122.388478	37.750720
5	5794_20160907	-122.481299	37.747228

## Index json file

```
[ ]: import pandas as pd
df = pd.DataFrame(sf_restaurants_inspections)
path = f"s3://{bucket}/json/sf_restaurants_inspections.json"
wr.s3.to_json(df, path, orient='records', lines=True)
```

```
[8]: # index json w/ providing keys
wr.opensearch.index_json(
    client,
    path=path, # path can be s3 or local
    index="sf_restaurants_inspections_dedup",
    id_keys=["inspection_id"] # can be multiple fields. arg applicable to all index_
    ↵ * functions
)
Indexing: 100% (6/6)|#####
Elapsed Time: 0:00:00
[8]: {'success': 6, 'errors': []}
```

```
[9]: # now there are no duplicates. There are total 5 documents
wr.opensearch.search(
    client,
    index="sf_restaurants_inspections_dedup",
    _source=["inspection_id", "business_name", "business_location"]
)
```

```
[9]: _id          business_name  inspection_id \
0  24936_20160609  San Francisco Soup Company  24936_20160609
1  66198_20160527  San Francisco Restaurant  66198_20160527
2  5794_20160907    Soup-or-Salad      5794_20160907
3  60354_20161123    Soup Unlimited    60354_20161123
4  1797_20160705    TIO CHILOS GRILL   1797_20160705

business_location.lon  business_location.lat
0                  -122.400152        37.793199
1                  -122.388478        37.750720
2                  -122.481299        37.747228
3                  -122.409061        37.783527
4                  -122.409752        37.752807
```

## Index CSV

```
[11]: wr.opensearch.index_csv(
    client,
    index="nyc_restaurants_inspections_sample",
    path='https://data.cityofnewyork.us/api/views/43nn-pn8j/rows.csv?'
    ↪accessType=DOWNLOAD', # index_csv supports local, s3 and url path
    id_keys=['CAMIS'],
    pandas_kwarg={'na_filter': True, 'nrows': 1000}, # pandas.read_csv() args
    ↪https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read_csv.html
    bulk_size=500 # modify based on your cluster size
)
```

Indexing: 100% (1000/1000) | #####| Elapsed Time: 0:00:00

```
[11]: {'success': 1000, 'errors': []}
```

```
[12]: wr.opensearch.search(
    client,
    index="nyc_restaurants_inspections_sample",
    size=5
)
```

	_id	CAMIS	DBA	BORO	BUILDING	\
0	41610426	41610426	GLOW THAI RESTAURANT	Brooklyn	7107	
1	40811162	40811162	CARMINE'S	Manhattan	2450	
2	50012113	50012113	TANG	Queens	196-50	
3	50014618	50014618	TOTTO RAMEN	Manhattan	248	
4	50045782	50045782	OLLIE'S CHINESE RESTAURANT	Manhattan	2705	

	STREET	ZIPCODE	PHONE	CUISINE	DESCRIPTION	\
0	3 AVENUE	11209.0	7187481920		Thai	
1	BROADWAY	10024.0	2123622200		Italian	
2	NORTHERN BOULEVARD	11358.0	7182797080		Korean	
3	EAST 52 STREET	10022.0	2124210052		Japanese	
4	BROADWAY	10025.0	2129323300		Chinese	

	INSPECTION DATE	... RECORD DATE		INSPECTION TYPE	\
0	02/26/2020	... 10/04/2021		Cycle Inspection / Re-inspection	
1	05/28/2019	... 10/04/2021		Cycle Inspection / Initial Inspection	
2	08/16/2018	... 10/04/2021		Cycle Inspection / Initial Inspection	
3	08/20/2018	... 10/04/2021		Cycle Inspection / Re-inspection	
4	10/21/2019	... 10/04/2021		Cycle Inspection / Re-inspection	

	Latitude	Longitude	Community Board	Council District	Census Tract	\
0	40.633865	-74.026798		310.0	43.0	6800.0
1	40.791168	-73.974308		107.0	6.0	17900.0
2	40.757850	-73.784593		411.0	19.0	145101.0
3	40.756596	-73.968749		106.0	4.0	9800.0
4	40.799318	-73.968440		107.0	6.0	19100.0

	BIN	BBL	NTA	
0	3146519.0	3.05891e+09	BK31	
1	1033560.0	1.012380e+09	MN12	

(continues on next page)

(continued from previous page)

```
2 4124565.0 4.055200e+09 QN48
3 1038490.0 1.013250e+09 MN19
4 1056562.0 1.018750e+09 MN12
```

[5 rows x 27 columns]

### 3. Search

Search results are returned as Pandas DataFrame

#### 3.1 Search by DSL

```
[13]: # add a search query. search all soup businesses
wr.opensearch.search(
    client,
    index="sf_restaurants_inspections",
    _source=["inspection_id", "business_name", "business_location"],
    filter_path=["hits.hits._id", "hits.hits._source"],
    search_body={
        "query": {
            "match": {
                "business_name": "soup"
            }
        }
    }
)
```

	_id	business_name \
0	ff2f50f6-5415-4706-9bcb-af7c5eb0afa3	Soup House
1	7ba4fb17-f9a9-49da-b90e-8b3553d6d97c	Soup-or-Salad
2	b9e8f6a2-8fd1-4660-b041-2997a1a80984	San Francisco Soup Company
3	56b352e6-102b-4eff-8296-7e1fb2459bab	Soup Unlimited

	inspection_id	business_location.lon	business_location.lat
0	5794_20160907	-122.481299	37.747228
1	5794_20160907	-122.481299	37.747228
2	24936_20160609	-122.400152	37.793199
3	60354_20161123	-122.409061	37.783527

#### 3.1 Search by SQL

```
[14]: wr.opensearch.search_by_sql(
    client,
    sql_query="""SELECT business_name, inspection_score
                 FROM sf_restaurants_inspections_dedup
                 WHERE business_name LIKE '%soup%'
                 ORDER BY inspection_score DESC LIMIT 5"""
)
```

```
[14]:
```

	_index	_type	_id	_score	\
0	sf_restaurants_inspections_dedup	_doc	5794_20160907	None	
1	sf_restaurants_inspections_dedup	_doc	60354_20161123	None	
2	sf_restaurants_inspections_dedup	_doc	24936_20160609	None	

	business_name	inspection_score
0	Soup-or-Salad	96
1	Soup Unlimited	95
2	San Francisco Soup Company	77

#### 4. Delete Indices

```
[15]: wr.opensearch.delete_index(  
    client=client,  
    index="sf_restaurants_inspections"  
)  
[15]: {'acknowledged': True}
```

#### 5. Bonus - Prepare data and index from DataFrame

For this exercise we'll use DOHMH New York City Restaurant Inspection Results dataset

```
[16]: import pandas as pd  
[17]: df = pd.read_csv('https://data.cityofnewyork.us/api/views/43nn-pn8j/rows.csv?  
    ↪accessType=DOWNLOAD')
```

#### Prepare the data for indexing

```
[18]: # fields names underscore casing  
df.columns = [col.lower().replace(' ', '_') for col in df.columns]  
  
# convert lon/lat to OpenSearch geo_point  
df['business_location'] = "POINT (" + df.longitude.fillna('0').astype(str) + " " + df.  
    ↪latitude.fillna('0').astype(str) + ")"
```

#### Create index with mapping

```
[19]: # delete index if exists  
wr.opensearch.delete_index(  
    client=client,  
    index="nyc_restaurants"  
  
)  
  
# use dynamic_template to map date fields
```

(continues on next page)

(continued from previous page)

```
# define business_location as geo_point
wr.opensearch.create_index(
    client=client,
    index="nyc_restaurants_inspections",
    mappings={
        "dynamic_templates" : [
            {
                "dates" : {
                    "match" : "*date",
                    "mapping" : {
                        "type" : "date",
                        "format" : 'MM/dd/yyyy'
                    }
                }
            }
        ],
        "properties": {
            "business_location": {
                "type": "geo_point"
            }
        }
    }
)
[19]: {'acknowledged': True,
       'shards_acknowledged': True,
       'index': 'nyc_restaurants_inspections'}
```

## Index dataframe

```
[20]: wr.opensearch.index_df(
    client,
    df=df,
    index="nyc_restaurants_inspections",
    id_keys=["camis"],
    bulk_size=1000
)
Indexing: 100% (382655/382655)#####
Elapsed Time: 0:04:15
[20]: {'success': 382655, 'errors': []}
```

## Execute geo query

### Sort restaurants by distance from Times-Square

```
[21]: wr.opensearch.search(
    client,
    index="nyc_restaurants_inspections",
    filter_path=["hits.hits._source"],
    size=100,
    search_body={
        "query": {
            "match_all": {}
        },
        "sort": [
            {
                "_geo_distance": {
                    "business_location": { # Times-Square - https://geojson.io/#map=16/40.
                        ↵7563/-73.9862
                        "lat": 40.75613228383523,
                        "lon": -73.9865791797638
                    },
                    "order": "asc"
                }
            }
        ]
    }
)

[21]:   camis          dba      boro building      street \
0  41551304  THE COUNTER  Manhattan       7  TIMES SQUARE
1  50055665  ANN INC CAFE  Manhattan       7  TIMES SQUARE
2  50049552  ERNST AND YOUNG  Manhattan       5  TIMES SQ
3  50014078  RED LOBSTER  Manhattan       5  TIMES SQ
4  50015171  NEW AMSTERDAM THEATER  Manhattan    214  WEST  42 STREET
..   ...
95 41552060  PROSKAUER ROSE  Manhattan      11  TIMES SQUARE
96 41242148  GABBY O'HARA'S  Manhattan     123  WEST  39 STREET
97 50095860  THE TIMES EATERY  Manhattan     680      8 AVENUE
98 50072861           ITSU  Manhattan      530      7 AVENUE
99 50068109  LUKE'S LOBSTER  Manhattan    1407      BROADWAY

      zipcode      phone cuisine_description inspection_date \
0  10036.0  2129976801      American  12/22/2016
1  10036.0  2125413287      American  12/11/2019
2  10036.0  2127739994  Coffee/Tea  11/30/2018
3  10036.0  2127306706      Seafood  10/03/2017
4  10036.0  2125825472      American  06/26/2018
..   ...
95 10036.0  2129695493      American  08/11/2017
96 10018.0  2122788984      Irish   07/30/2019
97 10036.0  6463867787      American  02/28/2020
98 10018.0  9176393645  Asian/Asian Fusion  09/10/2018
99 10018.0  9174759192      Seafood  09/06/2017
```

(continues on next page)

(continued from previous page)

```

                action  ... \
0  Violations were cited in the following area(s). ...
1  Violations were cited in the following area(s). ...
2  Violations were cited in the following area(s). ...
3  Violations were cited in the following area(s). ...
4  Violations were cited in the following area(s). ...
..          ...
95 Violations were cited in the following area(s). ...
96 Violations were cited in the following area(s). ...
97 Violations were cited in the following area(s). ...
98 Violations were cited in the following area(s). ...
99 Violations were cited in the following area(s). ...

            inspection_type  latitude  longitude \
0      Cycle Inspection / Initial Inspection  40.755908 -73.986681
1      Cycle Inspection / Initial Inspection  40.755908 -73.986681
2      Cycle Inspection / Initial Inspection  40.755702 -73.987208
3      Cycle Inspection / Initial Inspection  40.755702 -73.987208
4      Cycle Inspection / Re-inspection   40.756317 -73.987652
..          ...
95 Administrative Miscellaneous / Initial Inspection  40.756891 -73.990023
96             Cycle Inspection / Re-inspection  40.753405 -73.986602
97 Pre-permit (Operational) / Initial Inspection  40.757991 -73.989218
98 Pre-permit (Operational) / Initial Inspection  40.753844 -73.988551
99 Pre-permit (Operational) / Initial Inspection  40.753432 -73.987151

community_board  council_district  census_tract  bin  bbl \
0           105.0            3.0    11300.0  1086069.0  1.009940e+09
1           105.0            3.0    11300.0  1086069.0  1.009940e+09
2           105.0            3.0    11300.0  1024656.0  1.010130e+09
3           105.0            3.0    11300.0  1024656.0  1.010130e+09
4           105.0            3.0    11300.0  1024660.0  1.010130e+09
..          ...
95           105.0            3.0    11300.0  1087978.0  1.010138e+09
96           105.0            4.0    11300.0  1080611.0  1.008150e+09
97           105.0            3.0    11900.0  1024703.0  1.010150e+09
98           105.0            3.0    11300.0  1014485.0  1.007880e+09
99           105.0            3.0    11300.0  1015265.0  1.008140e+09


       nta  business_location
0  MN17  POINT (-73.986680953809 40.755907817312)
1  MN17  POINT (-73.986680953809 40.755907817312)
2  MN17  POINT (-73.987207980138 40.755702020307)
3  MN17  POINT (-73.987207980138 40.755702020307)
4  MN17  POINT (-73.987651832547 40.756316895053)
..          ...
95  MN17  POINT (-73.990023200823 40.756890780426)
96  MN17  POINT (-73.986602050292 40.753404587174)
97  MN17  POINT (-73.989218092096 40.757991356019)
98  MN17  POINT (-73.988551029682 40.753843959794)
99  MN17  POINT (-73.98715066791 40.753432097521)

```

(continues on next page)

(continued from previous page)

[100 rows x 27 columns]



AWS SDK for pandas

### 1.8.32 32 - AWS Lake Formation - Glue Governed tables

This tutorial assumes that your IAM user/role has the required Lake Formation permissions to create and read AWS Glue Governed tables

#### Table of Contents

- 1. *Read Governed table*
  - 1.1 *Read PartiQL query*
    - \* 1.1.1 *Read within transaction*
    - \* 1.1.2 *Read within query as of time*
  - 1.2 *Read full table*
- 2. *Write Governed table*
  - 2.1 *Create new Governed table*
    - \* 2.1.1 *CSV table*
    - \* 2.1.2 *Parquet table*
  - 2.2 *Overwrite operations*
    - \* 2.2.1 *Overwrite*
    - \* 2.2.2 *Append*
    - \* 2.2.3 *Create partitioned Governed table*
    - \* 2.2.4 *Overwrite partitions*
- 3. *Multiple read/write operations within a transaction*

## 1. Read Governed table

### 1.1 Read PartiQL query

```
[ ]: import awswrangler as wr

database = "gov_db" # Assumes a Glue database registered with Lake Formation exists in the account
table = "gov_table" # Assumes a Governed table exists in the account
catalog_id = "111111111111" # AWS Account Id

# Note 1: If a transaction_id is not specified, a new transaction is started
df = wr.lakeformation.read_sql_query(
    sql=f"SELECT * FROM {table};",
    database=database,
    catalog_id=catalog_id
)
```

#### 1.1.1 Read within transaction

```
[ ]: transaction_id = wr.lakeformation.start_transaction(read_only=True)
df = wr.lakeformation.read_sql_query(
    sql=f"SELECT * FROM {table};",
    database=database,
    transaction_id=transaction_id
)
```

#### 1.1.2 Read within query as of time

```
[ ]: import calendar
import time

query_as_of_time = query_as_of_time = calendar.timegm(time.gmtime())
df = wr.lakeformation.read_sql_query(
    sql=f"SELECT * FROM {table} WHERE id=:id; AND name=:name;",
    database=database,
    query_as_of_time=query_as_of_time,
    params={"id": 1, "name": "Ayoub"}
)
```

## 1.2 Read full table

```
[ ]: df = wr.lakeformation.read_sql_table(  
    table=table,  
    database=database  
)
```

## 2. Write Governed table

### 2.1 Create a new Governed table

Enter your bucket name:

```
[ ]: import getpass  
  
bucket = getpass.getpass()
```

If a governed table does not exist, it can be created by passing an S3 path argument. Make sure your IAM user/role has enough permissions in the Lake Formation database

#### 2.1.1 CSV table

```
[ ]: import pandas as pd  
  
table = "gov_table_csv"  
  
df=pd.DataFrame({  
    "col": [1, 2, 3],  
    "col2": ["A", "A", "B"],  
    "col3": [None, "test", None]  
})  
# Note 1: If a transaction_id is not specified, a new transaction is started  
# Note 2: When creating a new Governed table, `table_type="GOVERNED"` must be specified.  
# Otherwise the default is to create an EXTERNAL_TABLE  
wr.s3.to_csv(  
    df=df,  
    path=f"s3://{bucket}/{database}/{table}/", # S3 path  
    dataset=True,  
    database=database,  
    table=table,  
    glue_table_settings={  
        "table_type": "GOVERNED",  
    },  
)
```

## 2.1.2 Parquet table

```
[ ]: table = "gov_table_parquet"

df = pd.DataFrame({"c0": [0, None]}, dtype="Int64")
wr.s3.to_parquet(
    df=df,
    path=f"s3://{bucket}/{database}/{table}/",
    dataset=True,
    database=database,
    table=table,
    glue_table_settings=wr.typing.GlueTableSettings(
        table_type="GOVERNED",
        description="c0",
        parameters={"num_cols": str(len(df.columns)), "num_rows": str(len(df.index))},
        columns_comments={"c0": "0"},
    )
)
```

## 2.2 Overwrite operations

### 2.2.1 Overwrite

```
[ ]: df = pd.DataFrame({"c1": [None, 1, None]}, dtype="Int16")
wr.s3.to_parquet(
    df=df,
    dataset=True,
    mode="overwrite",
    database=database,
    table=table,
    glue_table_settings=wr.typing.GlueTableSettings(
        description="c1",
        parameters={"num_cols": str(len(df.columns)), "num_rows": str(len(df.index))},
        columns_comments={"c1": "1"}
),
```

### 2.2.2 Append

```
[ ]: df = pd.DataFrame({"c1": [None, 2, None]}, dtype="Int8")
wr.s3.to_parquet(
    df=df,
    dataset=True,
    mode="append",
    database=database,
    table=table,
    description="c1",
    parameters={"num_cols": str(len(df.columns)), "num_rows": str(len(df.index) * 2)},
    columns_comments={"c1": "1"}
)
```

## 2.2.3 Create partitioned Governed table

```
[ ]: table = "gov_table_parquet_partitioned"

df = pd.DataFrame({"c0": ["foo", None], "c1": [0, 1]})

wr.s3.to_parquet(
    df=df,
    path=f"s3://{bucket}/{database}/{table}/",
    dataset=True,
    database=database,
    table=table,
    glue_table_settings=wr.typing.GlueTableSettings(
        table_type="GOVERNED",
        partition_cols=["c1"],
        description="c0+c1",
        parameters={"num_cols": "2", "num_rows": "2"},
        columns_comments={"c0": "zero", "c1": "one"},
    ),
)
```

## 2.2.4 Overwrite partitions

```
[ ]: df = pd.DataFrame({"c0": [None, None], "c1": [0, 2]})

wr.s3.to_parquet(
    df=df,
    dataset=True,
    mode="overwrite_partitions",
    database=database,
    table=table,
    partition_cols=["c1"],
    description="c0+c1",
    parameters={"num_cols": "2", "num_rows": "3"},
    columns_comments={"c0": "zero", "c1": "one"}
)
```

## 3. Multiple read/write operations within a transaction

```
[ ]: read_table = "gov_table_parquet"
write_table = "gov_table_multi_parquet"

transaction_id = wr.lakeformation.start_transaction(read_only=False)

df = pd.DataFrame({"c0": [0, None]}, dtype="Int64")
wr.s3.to_parquet(
    df=df,
    path=f"s3://{bucket}/{database}/{write_table}_1",
    dataset=True,
    database=database,
    table=f"{write_table}_1",
    glue_table_settings={
```


(continues on next page)

(continued from previous page)

```
        "table_type": "GOVERNED",
        "transaction_id": transaction_id,
    },
)

df2 = wr.lakeformation.read_sql_table(
    table=read_table,
    database=database,
    transaction_id=transaction_id,
    use_threads=True
)

df3 = pd.DataFrame({"c1": [None, 1, None]}, dtype="Int16")
wr.s3.to_parquet(
    df=df2,
    path=f"s3://{bucket}/{database}/{write_table}_2",
    dataset=True,
    mode="append",
    database=database,
    table=f"{write_table}_2",
    glue_table_settings={
        "table_type": "GOVERNED",
        "transaction_id": transaction_id,
    },
)
wr.lakeformation.commit_transaction(transaction_id=transaction_id)
```



AWS SDK for pandas

## 1.8.33 33 - Amazon Neptune

Note: to be able to use SPARQL you must either install SPARQLWrapper or install AWS SDK for pandas with sparql extra:

```
[ ]: !pip install 'awsrangler[gremlin, openCypher, sparql]'
```

### Initialize

The first step to using AWS SDK for pandas with Amazon Neptune is to import the library and create a client connection.

Note: Connecting to Amazon Neptune requires that the application you are running has access to the Private VPC where Neptune is located. Without this access you will not be able to connect using AWS SDK for pandas.

```
[ ]: import awsWrangler as wr
import pandas as pd

url='<INSERT CLUSTER ENDPOINT>' # The Neptune Cluster endpoint
iam_enabled = False # Set to True/False based on the configuration of your cluster
neptune_port = 8182 # Set to the Neptune Cluster Port, Default is 8182
client = wr.neptune.connect(url, neptune_port, iam_enabled=iam_enabled)
```

### Return the status of the cluster

```
[ ]: print(client.status())
```

### Retrieve Data from Neptune using AWS SDK for pandas

AWS SDK for pandas supports querying Amazon Neptune using TinkerPop Gremlin and openCypher for property graph data or SPARQL for RDF data.

#### Gremlin

```
[ ]: query = "g.E().project('source', 'target').by(outV().id()).by(inV().id()).limit(5)"
df = wr.neptune.execute_gremlin(client, query)
display(df.head(5))
```

#### SPARQL

```
[ ]: query = """
PREFIX foaf: <https://xmlns.com/foaf/0.1/>
PREFIX ex: <https://www.example.com/>
SELECT ?firstName WHERE { ex:JaneDoe foaf:knows ?person . ?person foaf:firstName
?firstName }"""
df = wr.neptune.execute_sparql(client, query)
display(df.head(5))
```

## openCypher

```
[ ]: query = "MATCH (n)-[r]-(d) RETURN id(n) as source, id(d) as target LIMIT 5"
df = wr.neptune.execute_opencypher(client, query)
display(df.head(5))
```

## Saving Data using AWS SDK for pandas

AWS SDK for pandas supports saving Pandas DataFrames into Amazon Neptune using either a property graph or RDF data model.

### Property Graph

If writing to a property graph then DataFrames for vertices and edges must be written separately. DataFrames for vertices must have a `~label` column with the label and a `~id` column for the vertex id.

If the `~id` column does not exist, the specified id does not exists, or is empty then a new vertex will be added.

If no `~label` column exists then writing to the graph will be treated as an update of the element with the specified `~id` value.

DataFrames for edges must have a `~id`, `~label`, `~to`, and `~from` column. If the `~id` column does not exist the specified id does not exists, or is empty then a new edge will be added. If no `~label`, `~to`, or `~from` column exists an exception will be thrown.

### Add Vertices/Nodes

```
[ ]: import uuid
import random
import string
def _create_dummy_vertex():
    data = dict()
    data["~id"] = uuid.uuid4()
    data["~label"] = "foo"
    data["int"] = random.randint(0, 1000)
    data["str"] = ''.join(random.choice(string.ascii_lowercase) for i in range(10))
    data["list"] = [random.randint(0, 1000), random.randint(0, 1000)]
    return data

data = [_create_dummy_vertex(), _create_dummy_vertex(), _create_dummy_vertex()]
df = pd.DataFrame(data)
res = wr.neptune.to_property_graph(client, df)
query = f"MATCH (s) WHERE id(s)={data[0]['~id']} RETURN s"
df = wr.neptune.execute_opencypher(client, query)
display(df)
```

## Add Edges

```
[ ]: import uuid
import random
import string
def _create_dummy_edge():
    data = dict()
    data["~id"] = uuid.uuid4()
    data["~label"] = "bar"
    data["~to"] = uuid.uuid4()
    data["~from"] = uuid.uuid4()
    data["int"] = random.randint(0, 1000)
    data["str"] = ''.join(random.choice(string.ascii_lowercase) for i in range(10))
    return data

data = [_create_dummy_edge(), _create_dummy_edge(), _create_dummy_edge()]
df = pd.DataFrame(data)
res = wr.neptune.to_property_graph(client, df)
query = f"MATCH (s)-[r]-(d) WHERE id(r)='{data[0]['~id']}' RETURN r"
df = wr.neptune.execute_opencypher(client, query)
display(df)
```

## Update Existing Nodes

```
[ ]: idval=uuid.uuid4()
wr.neptune.execute_gremlin(client, f"g.addV().property(T.id, '{str(idval)}')")
query = f"MATCH (s) WHERE id(s)='{idval}' RETURN s"
df = wr.neptune.execute_opencypher(client, query)
print("Before")
display(df)
data = [{"~id": idval, "age": 50}]
df = pd.DataFrame(data)
res = wr.neptune.to_property_graph(client, df)
df = wr.neptune.execute_opencypher(client, query)
print("After")
display(df)
```

## Setting cardinality based on the header

If you would like to save data using `single` cardinality then you can postfix `(single)` to the column header and set `use_header_cardinality=True` (default). e.g. A column named `name(single)` will save the `name` property as single cardinality. You can disable this by setting `use_header_cardinality=False`.

```
[ ]: data = [_create_dummy_vertex()]
df = pd.DataFrame(data)
# Adding (single) to the column name in the DataFrame will cause it to write that
# property as `single` cardinality
df.rename(columns={"int": "int(single)"}, inplace=True)
res = wr.neptune.to_property_graph(client, df, use_header_cardinality=True)
```

(continues on next page)

(continued from previous page)

```
# This can be disabled by setting `use_header_cardinality = False`
df.rename(columns={"int": "int(single)"}, inplace=True)
res = wr.neptune.to_property_graph(client, df, use_header_cardinality=False)
```

## RDF

The DataFrame must consist of triples with column names for the subject, predicate, and object specified. If none are provided then s, p, and o are the default.

If you want to add data into a named graph then you will also need the graph column, default is g.

### Write Triples

```
[ ]: def _create_dummy_triple():
    data = dict()
    data["s"] = "http://example.com/resources/foo"
    data["p"] = uuid.uuid4()
    data["o"] = random.randint(0, 1000)
    return data

data = [_create_dummy_triple(), _create_dummy_triple(), _create_dummy_triple()]
df = pd.DataFrame(data)
res = wr.neptune.to_rdf_graph(client, df)
query = """
    PREFIX foo: <http://example.com/resources/>
    SELECT ?o WHERE { <foo:foo> <" + str(data[0]['p']) + "> ?o .}"""
df = wr.neptune.execute_sparql(client, query)
display(df)
```

### Write Quads

```
[ ]: def _create_dummy_quad():
    data = _create_dummy_triple()
    data["g"] = "bar"
    return data

data = [_create_dummy_quad(), _create_dummy_quad(), _create_dummy_quad()]
df = pd.DataFrame(data)
res = wr.neptune.to_rdf_graph(client, df)
query = """
    PREFIX foo: <http://example.com/resources/>
    SELECT ?o WHERE { <foo:foo> <" + str(data[0]['p']) + "> ?o .}"""
df = wr.neptune.execute_sparql(client, query)
display(df)
```

## Flatten DataFrames

One of the complexities of working with a row/columns paradigm, such as Pandas, with graph results set is that it is very common for graph results to return complex and nested objects. To help simplify using the results returned from a graph within a more tabular format we have added a method to flatten the returned Pandas DataFrame.

### Flattening the DataFrame

```
[ ]: client = wr.neptune.connect(url, 8182, iam_enabled=False)
query = "MATCH (n) RETURN n LIMIT 1"
df = wr.neptune.execute_opencypher(client, query)
print("Original")
display(df)
df_new=wr.neptune.flatten_nested_df(df)
print("Flattened")
display(df_new)
```

#### Removing the prefixing of the parent column name

```
[ ]: df_new=wr.neptune.flatten_nested_df(df, include_prefix=False)
display(df_new)
```

#### Specifying the column header separator

```
[ ]: df_new=wr.neptune.flatten_nested_df(df, separator='|')
display(df_new)
```

#### Putting it into a workflow

```
[ ]: pip install igraph networkx
```

#### Running PageRank using NetworkX

```
[ ]: import networkx as nx

# Retrieve Data from neptune
client = wr.neptune.connect(url, 8182, iam_enabled=False)
query = "MATCH (n)-[r]->(d) RETURN id(n) as source, id(d) as target LIMIT 100"
df = wr.neptune.execute_opencypher(client, query)

# Run PageRank
G=nx.from_pandas_edgelist(df, edge_attr=True)
pg = nx.pagerank(G)

# Save values back into Neptune
```

(continues on next page)

(continued from previous page)

```

rows=[]
for k in pg.keys():
    rows.append({'~id': k, 'pageRank_nx(single)': pg[k]})
pg_df=pd.DataFrame(rows, columns=['~id','pageRank_nx(single)'])
res = wr.neptune.to_property_graph(client, pg_df, use_header_cardinality=True)

# Retrieve newly saved data
query = "MATCH (n:airport) WHERE n.pageRank_nx IS NOT NULL RETURN n.code, n.pageRank_nx"
    ORDER BY n.pageRank_nx DESC LIMIT 5
df = wr.neptune.execute_opencypher(client, query)
display(df)

```

## Running PageRank using iGraph

```

[ ]: import igraph as ig


# Retrieve Data from neptune
client = wr.neptune.connect(url, 8182, iam_enabled=False)
query = "MATCH (n)-[r]->(d) RETURN id(n) as source, id(d) as target LIMIT 100"
df = wr.neptune.execute_opencypher(client, query)

# Run PageRank
g = ig.Graph.TupleList(df.itertuples(index=False), directed=True, weights=False)
pg = g.pagerank()

# Save values back into Neptune
rows=[]
for idx, v in enumerate(g.vs):
    rows.append({'~id': v['name'], 'pageRank_ig(single)': pg[idx]})
pg_df=pd.DataFrame(rows, columns=['~id','pageRank_ig(single)'])
res = wr.neptune.to_property_graph(client, pg_df, use_header_cardinality=True)

# Retrieve newly saved data
query = "MATCH (n:airport) WHERE n.pageRank_ig IS NOT NULL RETURN n.code, n.pageRank_ig"
    ORDER BY n.pageRank_ig DESC LIMIT 5
df = wr.neptune.execute_opencypher(client, query)
display(df)

```



AWS SDK for pandas

## 1.8.34 34 - Distributing Calls Using Ray

AWS SDK for pandas supports distribution of specific calls using `ray` and `modin`.

When enabled, data loading methods return modin dataframes instead of pandas dataframes. Modin provides seamless integration and compatibility with existing pandas code, with the benefit of distributing operations across your Ray instance and operating at a much larger scale.

```
[1]: !pip install "awswrangler[modin,ray,redshift]"
```

Importing awswrangler when `ray` and `modin` are installed will automatically initialize a local Ray instance.

```
[2]: import awswrangler as wr
import modin.pandas as pd

print(f"Execution Engine: {wr.engine.get()}")
print(f"Memory Format: {wr.memory_format.get()}")

2022-10-24 14:59:36,287 INFO worker.py:1518 -- Started a local Ray instance.

Execution Engine: EngineEnum.RAY
Memory Format: MemoryFormatEnum.MODIN
```

### Read data at scale

Data is read using all cores on a single machine or multiple nodes on a cluster

```
[3]: df = wr.s3.read_parquet(path="s3://amazon-reviews-pds/parquet/product_category=Furniture/
      ")
df.head(5)

Read progress: 100%| 10/10 [01:10<00:00,  7.03s/it]
UserWarning: When using a pre-initialized Ray cluster, please ensure that the runtime_
env sets environment variable __MODIN_AUTOIMPORT_PANDAS__ to 1

   marketplace customer_id      review_id product_id product_parent \
0           US    35680291    R3401VWWYVAU9A    B000MWFEV6        406798096
1           US    21000590    RU1I9NHALXPW5    B004C1RULU        239421036
2           US    12140069    R208R9CLCUQTB8    B000GFWQDI        297104356
3           US    23755701    R12FOIKUXPHBZ    B0055DOI50        39731200
4           US    50735969    RK0XU07P40TK9    B0026RH3X2        751769063

                           product_title  star_rating \
0  Baxton Studio Full Leather Storage Bench Ottom...          5
1  Alera Fraze Series Leather High-Back Swivel/Ti...          3
2  Matching Cherry Printer Stand with Casters and...          5
3                      Marquette Bed          5
4  Cape Craftsman Shutter 2-Door Cabinet          3

   helpful_votes  total_votes vine verified_purchase \
0            1           1     N                  Y
1            8           9     N                  Y
2            4           4     N                  Y
3            6           6     N                  Y
4           12          12     N                 N
```

(continues on next page)

(continued from previous page)

```

review_headline \
0      High quality and roomy
1 Do not judge the chair on the first day alone.
2     Printer stand made into printer / PC stand
3             Excellent Value!!
4           Nice, but not best quality

review_body review_date year
0 I bought this bench as a storage necessity as ... 2009-05-17 2009
1 Received this chair really fast because I had ... 2012-06-29 2012
2 I wanted to get my pc's off the floor and off ... 2009-05-17 2009
3 Great quality for the price. This bed is easy ... 2012-06-29 2012
4 I love the design of this cabinet! It's a very... 2009-05-17 2009

```

The data type is a modin DataFrame

```
[4]: type(df)
[4]: modin.pandas.DataFrame
```

However, this type is interoperable with standard pandas calls:

```
[5]: filtered_df = df[df.helpful_votes > 10]
excluded_columns = ["product_title", "review_headline", "review_body"]
filtered_df = filtered_df.loc[:, ~filtered_df.columns.isin(excluded_columns)]
```

Enter your bucket name:

```
[6]: bucket = "BUCKET_NAME"
```

## Write data at scale

The write operation is parallelized, leading to significant speed-ups

```
[7]: result = wr.s3.to_parquet(
    filtered_df,
    path=f"s3://'{bucket}'/amazon-reviews/",
    dataset=True,
    dtype={"review_date": "timestamp"},
)
print(f'Data has been written to {len(result['paths'])} files')

Write Progress: 100%| 10/10 [00:21<00:00,  2.14s/it]

Data has been written to 10 files
```

## Copy to Redshift at scale...

Data is first staged in S3 then a `COPY` command is executed against the Redshift cluster to load it. Both operations are distributed: S3 write with Ray and `COPY` in the Redshift cluster

```
[8]: # Connect to the Redshift instance
con = wr.redshift.connect("aws-sdk-pandas-redshift")

path = f"s3://{bucket}/stage/"
iam_role = "IAM_ROLE"
schema = "public"
table = "amazon_reviews"

wr.redshift.copy(
    df=filtered_df,
    path=path,
    con=con,
    schema=schema,
    table=table,
    mode="overwrite",
    iam_role=iam_role,
    max_rows_by_file=None,
)
Repartition: 100%|| 1/1 [00:00<00:00, 1.42it/s]
Write Progress: 100%|| 1/1 [00:06<00:00, 6.19s/it]
```

## ... and UNLOAD it back

Parallel calls can also be leveraged when reading from the cluster. The `UNLOAD` command distributes query processing in Redshift to dump files in S3 which are then read in parallel into a dataframe

```
[9]: wr.redshift.unload(
    sql=f"SELECT * FROM {schema}.{table} where star_rating = 5",
    con=con,
    iam_role=iam_role,
    path=path,
    keep_files=True,
)
2022-10-20 11:20:02,369 WARNING read_api.py:291 -- The number of blocks in this
↳ dataset (2) limits its parallelism to 2 concurrent tasks. This is much less than the
↳ number of available CPU slots in the cluster. Use `repartition(n)` to increase the
↳ number of dataset blocks.
Read progress: 100%|| 2/2 [00:01<00:00, 1.41it/s]
```

```
[9]:   marketplace  customer_id      review_id  product_id product_parent \
0          US     23875938    RC5BC3HYUV324  B000EPKLFA      878266274
1          US     22174246    R3MFRIKP6HMH0W  B001NJ4J6I      394928248
2          US     52886745    R1T9C0QELFI939  B0012ZNNR4      364197484
3          US     14527742    R2CIP31E02GXDK  B000M5Z98G      199037166
4          US     41393002    R29IOXB832QR6L  B0071HBVYE      956030824
...
16022      ...       ...       ...       ...
           US     20481704    R2KV325KBKDKL8  B00G701H5E      703622282
```

(continues on next page)

(continued from previous page)

16023	US	37023256	R1FJT6UF7KM8GV	B005VY8U8Y	220718418
16024	US	24286944	R1RSIZBY4Z3PF2	B00LNCDGKU	934098561
16025	US	15276457	R31YFDIUQ2HI2X	B005KFHWPG	310427061
16026	US	52215985	R11U6K10IDEUKH	B00NEJ4Y4M	22567782
<hr/>					
0	star_rating	helpful_votes	total_votes	vine	verified_purchase \
1	5	15	17	N	Y
2	5	20	23	N	Y
3	5	32	33	N	N
4	5	12	12	N	Y
...	...	...	...	...	...
16022	5	16	16	N	N
16023	5	23	25	N	Y
16024	5	47	49	N	Y
16025	5	19	20	N	Y
16026	5	62	67	Y	N
<hr/>					
0	review_date	year			
1	2009-07-12	2009			
2	2009-07-19	2009			
3	2009-07-24	2009			
4	2009-08-23	2009			
5	2012-07-12	2012			
...	...	...			
16022	2014-11-06	2014			
16023	2014-11-08	2014			
16024	2014-11-14	2014			
16025	2014-11-15	2014			
16026	2014-11-16	2014			

[16027 rows x 12 columns]

### Find a needle in a hay stack with S3 Select

```
[10]: # Run S3 Select query against all objects in the category for a given customer ID
wr.s3.select_query(
    sql="SELECT * FROM s3object s where s.\"customer_id\" = '51624146'", 
    path="s3://amazon-reviews-pds/parquet/product_category=Office_Products/*.parquet",
    input_serialization="Parquet",
    input_serialization_params={},
    scan_range_chunk_size=32*1024*1024,
)
```

UserWarning: When using a pre-initialized Ray cluster, please ensure that the runtime env sets environment variable \_\_MODIN\_AUTOIMPORT\_PANDAS\_\_ to 1

```
[10]: marketplace customer_id      review_id product_id product_parent \
0          US      51624146     RU9SWH8SHOBBS  B001ERDENS      658861629
1          US      51624146     RA09QADXC9TUH  B00GJQA4TG      184072656
2          US      51624146     R1D94CA7TKY9DU  B000MK647G      396184528
```

(continues on next page)


(continued from previous page)

```
product_title  star_rating  \
0 LINKYO Compatible Toner Cartridge Replacement ...      5
1 SuperChalks White Liquid Chalk Marker Pens 4-P...      4
2 Fax Toner Cartridge for Brother IntelliFax 575...      5

helpful_votes  total_votes vine verified_purchase  \
0          0            0    N             Y
1          0            0    N             Y
2          0            0    N             Y

review_headline  \
0      Perfect fit for my HP LaserJet M1522 nf
1  Smooth flowing "ink, " but these markers left ...
2                  Came quickly, works great

review_body review_date  year
0 I will never buy &#34;official&#34; toner cart... 2013-07-12 2013
1 Smooth flowing &#34;ink,&#34; but these marker... 2014-10-06 2014
2 I bought four of these for my office. Just kno... 2014-03-26 2014
```



AWS SDK for pandas

### 1.8.35 35 - Distributing Calls on Ray Remote Cluster

AWS SDK for pandas supports distribution of specific calls on a cluster of EC2s using [ray](#).

Note that this tutorial creates a cluster of EC2 nodes which will incur a charge in your account. Please make sure to delete the cluster at the end.

#### Install the library

```
[ ]: !pip install "awswrangler[modin,ray]"
```

## Configure and Build Ray Cluster on AWS

### Build Prerequisite Infrastructure

Click on the link below to provision an AWS CloudFormation stack. It builds a security group and IAM instance profile for the Ray Cluster to use. A valid CIDR range (encompassing your local machine IP) and a VPC ID are required.

[|a72aea4144b54f6a973d72f9a4dc536b|](#)

### Configure Ray Cluster Configuration

Start with a cluster configuration file (YAML).

```
[ ]: !touch config.yml
```

Replace all values to match your desired region, account number and name of resources deployed by the above CloudFormation Stack.

A limited set of AWS regions is currently supported (Python 3.8 and above). Find the corresponding Ray AMI IDs [here](#). The example configuration below uses the AMI for us-east-1.

Then edit config.yml file with your custom configuration.

```
[ ]: cluster_name: pandas-sdk-cluster

min_workers: 2
max_workers: 2

provider:
    type: aws
    region: us-east-1 # Change AWS region as necessary
    availability_zone: us-east-1a,us-east-1b,us-east-1c # Change as necessary
    security_group:
        GroupName: ray-cluster
        cache_stopped_nodes: False

available_node_types:
    ray.head.default:
        node_config:
            InstanceType: m4.xlarge
            IamInstanceProfile:
                # Replace with your account id and profile name if you did not use the default
                ↵value
                    Arn: arn:aws:iam::{ACCOUNT ID}:instance-profile/ray-cluster
                    # Replace ImageId if using a different region / python version
                    ImageId: ami-0ea510fc67686b48
                    TagSpecifications: # Optional tags
                        - ResourceType: "instance"
                            Tags:
                                - Key: Platform
                                    Value: "ray"

    ray.worker.default:
        min_workers: 2
```

(continues on next page)

(continued from previous page)

```
max_workers: 2
node_config:
    InstanceType: m4.xlarge
    IamInstanceProfile:
        # Replace with your account id and profile name if you did not use the default
        ↪value
        Arn: arn:aws:iam::{ACCOUNT ID}:instance-profile/ray-cluster
        # Replace ImageId if using a different region / python version
        ImageId: ami-0ea510fcb67686b48
        TagSpecifications: # Optional tags
            - ResourceType: "instance"
            Tags:
                - Key: Platform
                  Value: "ray"

setup_commands:
- pip install "awswrangler[modin,ray]==3.0.0"
```

## Provision Ray Cluster

The command below creates a Ray cluster in your account based on the aforementioned config file. It consists of one head node and 2 workers (m4xlarge EC2s). The command takes a few minutes to complete.

```
[ ]: !ray up -y config.yml
```

Once the cluster is up and running, we set the RAY\_ADDRESS environment variable to the head node Ray Cluster Address

```
[ ]: import os, subprocess

head_node_ip = subprocess.check_output(['ray', 'get-head-ip', 'config.yml']).decode("utf-8").split("\n")[-2]
os.environ['RAY_ADDRESS'] = f"ray://{head_node_ip}:10001"
```

As a result, awswrangler API calls now run on the cluster, not on your local machine. The SDK detects the required dependencies for its distributed mode and parallelizes supported methods on the cluster.

```
[ ]: import awswrangler as wr
import modin.pandas as pd

print(f"Execution engine: {wr.engine.get()}")
print(f"Memory format: {wr.memory_format.get()}")
```

Enter bucket Name

```
[ ]: bucket = "BUCKET_NAME"
```

## Read & write some data at scale on the cluster

```
[ ]: # Read last 3 months of Taxi parquet compressed data (400 Mb)
df = wr.s3.read_parquet(path="s3://ursa-labs-taxi-data/2018/1*.parquet")
df["month"] = df["pickup_at"].dt.month

# Write it back to S3 partitioned by month
path=f"s3://{{bucket}}/taxi-data/"
database = "ray_test"
wr.catalog.create_database(name=database, exist_ok=True)
table = "nyc_taxi"

wr.s3.to_parquet(
    df=df,
    path=path,
    dataset=True,
    database=database,
    table=table,
    partition_cols=["month"],
)
```

## Read it back via Athena UNLOAD

The `UNLOAD` command distributes query processing in Athena to dump results in S3 which are then read in parallel into a dataframe

```
[ ]: unload_path = f"s3://{{bucket}}/unload/nyc_taxi/"


# Athena UNLOAD requires that the S3 path is empty
# Note that s3.delete_objects is also a distributed call
wr.s3.delete_objects(unload_path)

wr.athena.read_sql_query(
    f"SELECT * FROM {table}",
    database=database,
    ctas_approach=False,
    unload_approach=True,
    s3_output=unload_path,
)
```

The EC2 cluster must be terminated or it will incur a charge.

```
[ ]: !ray down -y ./config.yml
```

More Info on Ray Clusters on AWS



AWS SDK for pandas

### 1.8.36 36 - Distributing Calls on Glue Interactive sessions

AWS SDK for pandas is pre-loaded into AWS Glue interactive sessions with Ray kernel, making it by far the easiest way to experiment with the library at scale.

In AWS Glue Studio, choose Jupyter Notebook to create an AWS Glue interactive session:

AWS Glue Studio > Jobs

Jobs [Info](#)

Create job [Info](#)

Visual with a source and target  
Start with a source, ApplyMapping transform, and target.

Visual with a blank canvas  
Author using an interactive visual interface.

Spark script editor  
Write or upload your own Spark code.

Python Shell script editor  
Write or upload your own Python shell script.

Jupyter Notebook  
Write your own code in a Jupyter Notebook for interactive development.

Ray script editor [New](#)  
Write your own code to run on Ray.


Options

Create a new notebook from scratch

Upload and edit an existing notebook  
Choose a local file.

[Create](#)

Then select Ray as the kernel. The IAM role must trust the AWS Glue service principal.

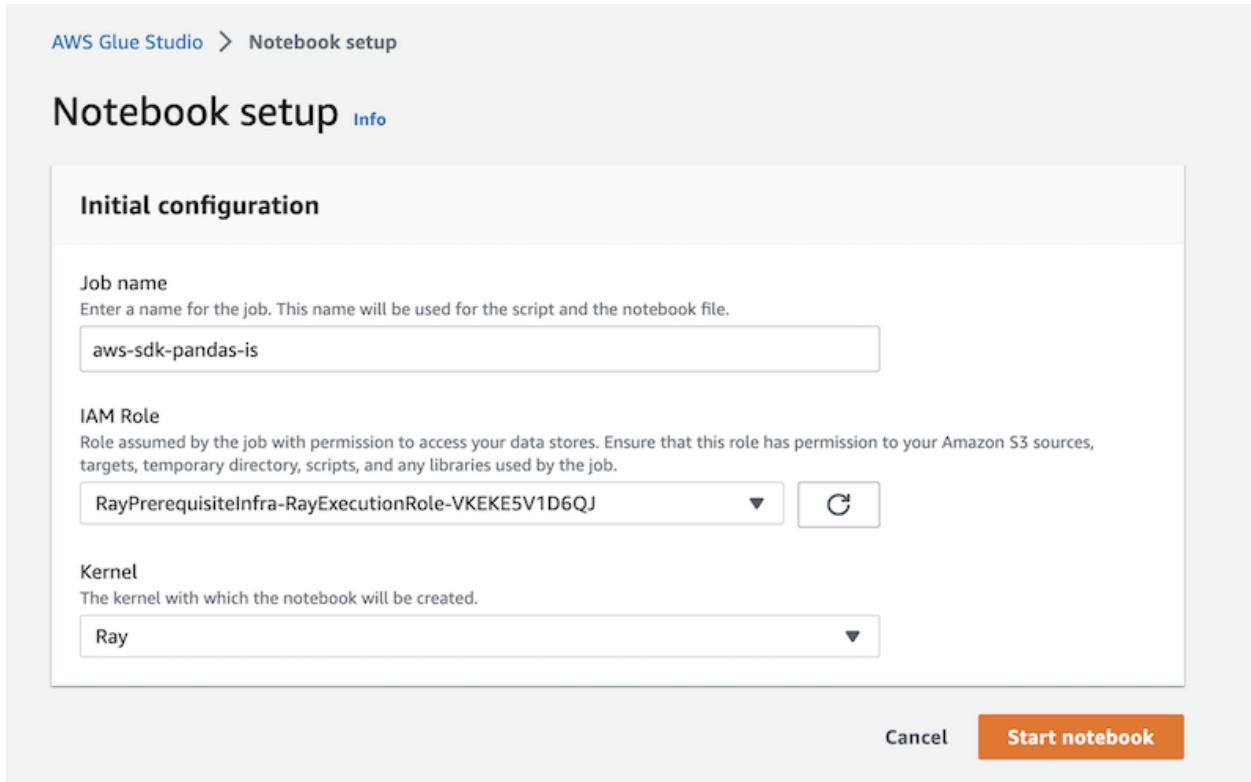

Once the notebook is up and running you can import the library. Since we are running on AWS Glue with Ray, AWS SDK for pandas will automatically use the existing Ray cluster with no extra configuration needed.

## Install the library

```
[ ]: !pip install "awswrangler[modin]"
```

```
[1]: import awswrangler as wr

Welcome to the Glue Interactive Sessions Kernel
For more information on available magic commands, please type %help in any new cell.

Please view our Getting Started page to access the most up-to-date information on the
↳Interactive Sessions kernel: https://docs.aws.amazon.com/glue/latest/dg/interactive-
↳sessions.html
Installed kernel version: 0.37.0
Authenticating with environment variables and user-defined glue_role_arn: arn:aws:iam::  
↳977422593089:role/AWSGlueMantaTests
Trying to create a Glue session for the kernel.
Worker Type: Z.2X
Number of Workers: 5
Session ID: 309824f0-bad7-49d0-a2b4-e1b8c7368c5f
Job Type: glueray
Applying the following default arguments:
--glue_kernel_version 0.37.0
--enable-glue-datacatalog true
Waiting for session 309824f0-bad7-49d0-a2b4-e1b8c7368c5f to get into ready status...
Session 309824f0-bad7-49d0-a2b4-e1b8c7368c5f has been created.
```

```
2022-11-21 16:24:03,136 INFO worker.py:1329 -- Connecting to existing Ray cluster at ...
  ↵address: 2600:1f10:4674:6822:5b63:3324:984:3152:6379...
2022-11-21 16:24:03,144 INFO worker.py:1511 -- Connected to Ray cluster. View the ...
  ↵dashboard at 127.0.0.1:8265
```

```
[3]: df = wr.s3.read_csv(path="s3://nyc-tlc/csv_backup/yellow_tripdata_2021-0*.csv")  
Read progress: 100%|#####| 9/9 [00:10<00:00, 1.15s/it]  
UserWarning: When using a pre-initialized Ray cluster, please ensure that the runtime ...  
  ↵env sets environment variable __MODIN_AUTOIMPORT_PANDAS__ to 1
```

```
[4]: df.head()  



|   | VendorID | tpep_pickup_datetime | ... | total_amount | congestion_surcharge |
|---|----------|----------------------|-----|--------------|----------------------|
| 0 | 1.0      | 2021-01-01 00:30:10  | ... | 11.80        | 2.5                  |
| 1 | 1.0      | 2021-01-01 00:51:20  | ... | 4.30         | 0.0                  |
| 2 | 1.0      | 2021-01-01 00:43:30  | ... | 51.95        | 0.0                  |
| 3 | 1.0      | 2021-01-01 00:15:48  | ... | 36.35        | 0.0                  |
| 4 | 2.0      | 2021-01-01 00:31:49  | ... | 24.36        | 2.5                  |



[5 rows x 18 columns]


```

To avoid incurring a charge, make sure to delete the Jupyter Notebook when you are done experimenting.



AWS SDK for pandas

### 1.8.37 37 - Glue Data Quality

AWS Glue Data Quality helps you evaluate and monitor the quality of your data.

#### Create test data

First, let's start by creating test data, writing it to S3, and registering it in the Glue Data Catalog.

```
[ ]: import awswrangler as wr  
import pandas as pd  
  
glue_database = "aws_sdk_pandas"  
glue_table = "my_glue_table"  
path = "s3://BUCKET_NAME/my_glue_table/"
```

(continues on next page)

(continued from previous page)

```
df = pd.DataFrame([{"c0": [0, 1, 2], "c1": [0, 1, 2], "c2": [0, 0, 0]}])
wr.s3.to_parquet(df, path, dataset=True, database=glue_database, table=glue_table,
                  partition_cols=["c2"])
```

## Start with recommended data quality rules

AWS Glue Data Quality can recommend a set of data quality rules so you can get started quickly.

Note: Running Glue Data Quality recommendation and evaluation tasks requires an IAM role. This role must trust the Glue principal and allow permissions to various resources including the Glue table and the S3 bucket where your data is stored. Moreover, data quality IAM actions must be granted. To find out more, check Authorization.

```
[7]: first_ruleset = "ruleset_1"
iam_role_arn = "arn:aws:iam::..." # IAM role assumed by the Glue Data Quality job to
                                 # access resources

df_recommended_ruleset = wr.data_quality.create_recommendation_ruleset( # Creates a
                        # recommended ruleset
                        name=first_ruleset,
                        database=glue_database,
                        table=glue_table,
                        iam_role_arn=iam_role_arn,
                        number_of_workers=2,
)
df_recommended_ruleset
```

	rule_type	parameter	expression
0	RowCount	None	between 1 and 6
1	IsComplete	"c0"	None
2	Uniqueness	"c0"	> 0.95
3	ColumnValues	"c0"	<= 2
4	IsComplete	"c1"	None
5	Uniqueness	"c1"	> 0.95
6	ColumnValues	"c1"	<= 2
7	IsComplete	"c2"	None
8	ColumnValues	"c2"	in [0]

## Update the recommended rules

Recommended rulesets are not perfect and you are likely to modify them or create your own.

```
[17]: # Append and update rules
df_updated_ruleset = df_recommended_ruleset.append(
    {"rule_type": "Uniqueness", "parameter": "'c2'", "expression": "> 0.95"}, ignore_
    index=True
)

df_updated_ruleset.at[8, "expression"] = "in [0, 1, 2]"

# Update the existing ruleset (upsert)
```

(continues on next page)

(continued from previous page)

```
wr.data_quality.update_ruleset(
    name=first_ruleset,
    df_rules=df_updated_ruleset,
    mode="upsert", # update existing or insert new rules to the ruleset
)
```

```
wr.data_quality.get_ruleset(name=first_ruleset)
```

[17]:

	rule_type	parameter	expression
0	RowCount	None	between 1 and 6
1	IsComplete	"c0"	None
2	Uniqueness	"c0"	> 0.95
3	ColumnValues	"c0"	<= 2
4	IsComplete	"c1"	None
5	Uniqueness	"c1"	> 0.95
6	ColumnValues	"c1"	<= 2
7	IsComplete	"c2"	None
8	ColumnValues	"c2"	in [0, 1, 2]
9	Uniqueness	"c2"	> 0.95

## Run a data quality task

The ruleset can now be evaluated against the data. A cluster with 2 workers is used for the run. It returns a report with PASS/FAIL results for each rule.

[20]:

```
wr.data_quality.evaluate_ruleset(
    name=first_ruleset,
    iam_role_arn=iam_role_arn,
    number_of_workers=2,
```

[20]:

	Name	Description	Result	\
0	Rule_1	RowCount	between 1 and 6	PASS
1	Rule_2	IsComplete	"c0"	PASS
2	Rule_3	Uniqueness	"c0" > 0.95	PASS
3	Rule_4	ColumnValues	"c0" <= 2	PASS
4	Rule_5	IsComplete	"c1"	PASS
5	Rule_6	Uniqueness	"c1" > 0.95	PASS
6	Rule_7	ColumnValues	"c1" <= 2	PASS
7	Rule_8	IsComplete	"c2"	PASS
8	Rule_9	ColumnValues	"c2" in [0,1,2]	PASS
9	Rule_10	Uniqueness	"c2" > 0.95	FAIL

	ResultId	\
0	dqresult-be413b527c0e5520ad843323fec9cf2e2edb5	
1	dqresult-be413b527c0e5520ad843323fec9cf2e2edb5	
2	dqresult-be413b527c0e5520ad843323fec9cf2e2edb5	
3	dqresult-be413b527c0e5520ad843323fec9cf2e2edb5	
4	dqresult-be413b527c0e5520ad843323fec9cf2e2edb5	
5	dqresult-be413b527c0e5520ad843323fec9cf2e2edb5	
6	dqresult-be413b527c0e5520ad843323fec9cf2e2edb5	
7	dqresult-be413b527c0e5520ad843323fec9cf2e2edb5	

(continues on next page)

(continued from previous page)

```
8 dqresult-be413b527c0e5520ad843323fec9cf2e2edb6d5
9 dqresult-be413b527c0e5520ad843323fec9cf2e2edb6d5

                           EvaluationMessage
0                               NaN
1                               NaN
2                               NaN
3                               NaN
4                               NaN
5                               NaN
6                               NaN
7                               NaN
8                               NaN
9 Value: 0.0 does not meet the constraint requir...
```

## Create ruleset from Data Quality Definition Language definition

The Data Quality Definition Language (DQDL) is a domain specific language that you can use to define Data Quality rules. For the full syntax reference, see [DQDL](#).

```
[21]: second_ruleset = "ruleset_2"

dqdl_rules = (
    "Rules = ["
    "RowCount between 1 and 6,"
    'IsComplete "c0",'
    'Uniqueness "c0" > 0.95,'  

    'ColumnValues "c0" <= 2,'
    'IsComplete "c1",'
    'Uniqueness "c1" > 0.95,'  

    'ColumnValues "c1" <= 2,'
    'IsComplete "c2",'
    'ColumnValues "c2" <= 1'
    "]"
)

wr.data_quality.create_ruleset(
    name=second_ruleset,
    database=glue_database,
    table=glue_table,
    dqdl_rules=dqdl_rules,
)
```

## Create or update a ruleset from a data frame

AWS SDK for pandas also enables you to create or update a ruleset from a pandas data frame.

```
[24]: third_ruleset = "ruleset_3"

df_rules = pd.DataFrame({
    "rule_type": ["RowCount", "ColumnCorrelation", "Uniqueness"],
    "parameter": [None, "'c0' 'c1'", "'c0'"],
    "expression": ["between 2 and 8", "> 0.8", "> 0.95"],
})
wr.data_quality.create_ruleset(
    name=third_ruleset,
    df_rules=df_rules,
    database=glue_database,
    table=glue_table,
)

wr.data_quality.get_ruleset(name=third_ruleset)
```

	rule_type	parameter	expression	ruleset
0	RowCount	None	between 2 and 8	ruleset_3
1	ColumnCorrelation	"c0" "c1"	> 0.8	
2	Uniqueness	"c0"	> 0.95	

## Get multiple rulesets

```
[25]: wr.data_quality.get_ruleset(name=[first_ruleset, second_ruleset, third_ruleset])
```

	rule_type	parameter	expression	ruleset
0	RowCount	None	between 1 and 6	ruleset_1
1	IsComplete	"c0"	None	ruleset_1
2	Uniqueness	"c0"	> 0.95	ruleset_1
3	ColumnValues	"c0"	<= 2	ruleset_1
4	IsComplete	"c1"	None	ruleset_1
5	Uniqueness	"c1"	> 0.95	ruleset_1
6	ColumnValues	"c1"	<= 2	ruleset_1
7	IsComplete	"c2"	None	ruleset_1
8	ColumnValues	"c2"	in [0, 1, 2]	ruleset_1
9	Uniqueness	"c2"	> 0.95	ruleset_1
0	RowCount	None	between 1 and 6	ruleset_2
1	IsComplete	"c0"	None	ruleset_2
2	Uniqueness	"c0"	> 0.95	ruleset_2
3	ColumnValues	"c0"	<= 2	ruleset_2
4	IsComplete	"c1"	None	ruleset_2
5	Uniqueness	"c1"	> 0.95	ruleset_2
6	ColumnValues	"c1"	<= 2	ruleset_2
7	IsComplete	"c2"	None	ruleset_2
8	ColumnValues	"c2"	<= 1	ruleset_2
0	RowCount	None	between 2 and 8	ruleset_3
1	ColumnCorrelation	"c0" "c1"	> 0.8	ruleset_3
2	Uniqueness	"c0"	> 0.95	ruleset_3

## Evaluate Data Quality for a given partition

A data quality evaluation run can be limited to specific partition(s) by leveraging the `pushDownPredicate` expression in the `additional_options` argument

```
[26]: df = pd.DataFrame({"c0": [2, 0, 1], "c1": [1, 0, 2], "c2": [1, 1, 1]})


wr.s3.to_parquet(df, path, dataset=True, database=glue_database, table=glue_table, ↴
    partition_cols=["c2"])

wr.data_quality.evaluate_ruleset(
    name=third_ruleset,
    iam_role_arn=iam_role_arn,
    number_of_workers=2,
    additional_options={
        "pushDownPredicate": "(c2 == '1')",
    },
)

[26]:      Name          Description Result \
0  Rule_1  RowCount between 2 and 8   PASS
1  Rule_2  ColumnCorrelation "c0" "c1" > 0.8   FAIL
2  Rule_3       Uniqueness "c0" > 0.95   PASS

                                         ResultId \
0  dqresult-f676cf0345aa93f492e3e3c3d6cf1ad99b84dc6
1  dqresult-f676cf0345aa93f492e3e3c3d6cf1ad99b84dc6
2  dqresult-f676cf0345aa93f492e3e3c3d6cf1ad99b84dc6

                                         EvaluationMessage
0                               NaN
1  Value: 0.5 does not meet the constraint requir...
2                               NaN
```



AWS SDK for pandas

## 1.8.38 38 - OpenSearch Serverless

Amazon OpenSearch Serverless is an on-demand serverless configuration for Amazon OpenSearch Service.

### Create collection

A collection in Amazon OpenSearch Serverless is a logical grouping of one or more indexes that represent an analytics workload.

Collections must have an assigned encryption policy, network policy, and a matching data access policy that grants permission to its resources.

```
[ ]: # Install the optional modules first  
!pip install 'awswrangler[opensearch]'
```

```
[1]: import awswrangler as wr
```

```
[8]: data_access_policy = [  
    {  
        "Rules": [  
            {  
                "ResourceType": "index",  
                "Resource": [  
                    "index/my-collection/*",  
                ],  
                "Permission": [  
                    "aoss:*",  
                ],  
            },  
            {  
                "ResourceType": "collection",  
                "Resource": [  
                    "collection/my-collection",  
                ],  
                "Permission": [  
                    "aoss:*",  
                ],  
            },  
        ],  
        "Principal": [  
            wr.sts.get_current_identity_arn(),  
        ],  
    }  
]
```

AWS SDK for pandas can create default network and encryption policies based on the user input.

By default, the network policy allows public access to the collection, and the encryption policy encrypts the collection using AWS-managed KMS key.

Create a collection, and a corresponding data, network, and access policies:

```
[10]: collection = wr.opensearch.create_collection(  
        name="my-collection",
```

(continues on next page)

(continued from previous page)

```

        data_policy=data_access_policy,
    )

collection_endpoint = collection["collectionEndpoint"]

```

The call will wait and exit when the collection and corresponding policies are created and active.

To create a collection encrypted with customer KMS key, and attached to a VPC, provide KMS Key ARN and / or VPC endpoints:

```

[ ]: kms_key_arn = "arn:aws:kms:..."
vpc_endpoint = "vpce-..."

collection = wr.opensearch.create_collection(
    name="my-secure-collection",
    data_policy=data_access_policy,
    kms_key_arn=kms_key_arn,
    vpc_endpoints=[vpc_endpoint],
)

```

## Connect

Connect to the collection endpoint:

```
[12]: client = wr.opensearch.connect(host=collection_endpoint)
```

## Create index

To create an index, run:

```

[13]: index="my-index-1"

wr.opensearch.create_index(
    client=client,
    index=index,
)

[13]: {'acknowledged': True, 'shards_acknowledged': True, 'index': 'my-index-1'}

```

## Index documents

To index documents:

```

[25]: wr.opensearch.index_documents(
    client,
    documents=[{"_id": "1", "name": "John"}, {"_id": "2", "name": "George"}, {"_id": "3",
    ↪ "name": "Julia"}],
    index=index,
)

```

```
Indexing: 100% (3/3) | #####|Elapsed Time: 0:00:12
```

```
[25]: {'success': 3, 'errors': []}
```

It is also possible to index Pandas data frames:

```
[26]: import pandas as pd

df = pd.DataFrame(
    [{"_id": "1", "name": "John", "tags": ["foo", "bar"]}, {"_id": "2", "name": "George",
     ↪ "tags": ["foo"]}]
)

wr.opensearch.index_df(
    client,
    df=df,
    index="index-df",
)
```

```
Indexing: 100% (2/2) | #####|Elapsed Time: 0:00:12
```

```
[26]: {'success': 2, 'errors': []}
```

AWS SDK for pandas also supports indexing JSON and CSV documents.

For more examples, refer to the [031 - OpenSearch tutorial](#)

## Search

Search using search DSL:


```
[27]: wr.opensearch.search(
    client,
    index=index,
    search_body={
        "query": {
            "match": {
                "name": "Julia"
            }
        }
    }
)
```

```
[27]: _id   name
0    3    Julia
```

## Delete index

To delete an index, run:

```
[ ]: wr.opensearch.delete_index(
    client=client,
    index=index
)
```



AWS SDK for pandas

## 1.8.39 39 - Athena Iceberg

Athena supports read, time travel, write, and DDL queries for Apache Iceberg tables that use the Apache Parquet format for data and the AWS Glue catalog for their metastore. More in [User Guide](#).

### Create Iceberg table

```
[50]: import getpass
bucket_name = getpass.getpass()

[52]: import awswrangler as wr

glue_database = "aws_sdk_pandas"
glue_table = "iceberg_test"
path = f"s3://{bucket_name}/iceberg_test/"

# Cleanup table before create
wr.catalog.delete_table_if_exists(database=glue_database, table=glue_table)

create_sql = (
    f"CREATE TABLE {glue_table} (id int, name string) "
    f"LOCATION '{path}' "
    f"TBLPROPERTIES ('table_type'='ICEBERG', 'format'='parquet')"
)

wr.athena.start_query_execution(
    sql=create_sql,
    database=glue_database,
```

(continues on next page)

(continued from previous page)

```

    wait=True,
)

[52]: {'QueryExecutionId': '679240c6-020b-4226-a72f-11db54b8598b',
       'Query': "CREATE TABLE iceberg_test (id int, name string) LOCATION 's3://.../iceberg_"
       ↪_test/' TBLPROPERTIES ('table_type' = 'ICEBERG', 'format'='parquet')",
       'StatementType': 'DDL',
       'ResultConfiguration': {'OutputLocation': 's3://aws-athena-query-results-...-us-east-1/'
       ↪_679240c6-020b-4226-a72f-11db54b8598b.txt'},
       'ResultReuseConfiguration': {'ResultReuseByAgeConfiguration': {'Enabled': False}},
       'QueryExecutionContext': {'Database': 'aws_sdk_pandas'},
       'Status': {'State': 'SUCCEEDED',
                  'SubmissionDateTime': datetime.datetime(2023, 3, 16, 10, 39, 46, 276000, tzinfo=tzlocal()),
                  'CompletionDateTime': datetime.datetime(2023, 3, 16, 10, 39, 46, 913000, tzinfo=tzlocal())},
       'Statistics': {'EngineExecutionTimeInMillis': 490,
                      'DataScannedInBytes': 0,
                      'TotalExecutionTimeInMillis': 637,
                      'QueryQueueTimeInMillis': 122,
                      'ServiceProcessingTimeInMillis': 25,
                      'ResultReuseInformation': {'ReusedPreviousResult': False}},
       'WorkGroup': 'primary',
       'EngineVersion': {'SelectedEngineVersion': 'Athena engine version 3',
                         'EffectiveEngineVersion': 'Athena engine version 3'}}}

```

## Insert data

```

[53]: wr.athena.start_query_execution(
    sql=f"INSERT INTO {glue_table} VALUES (1,'John'), (2, 'Lily'), (3, 'Richard')",
    database=glue_database,
    wait=True,
)

[53]: {'QueryExecutionId': 'e339fc2-9db1-43ac-bb9e-9730e6395b51',
       'Query': "INSERT INTO iceberg_test VALUES (1,'John'), (2, 'Lily'), (3, 'Richard')",
       'StatementType': 'DML',
       'ResultConfiguration': {'OutputLocation': 's3://aws-athena-query-results-...-us-east-1/'
       ↪_e339fc2-9db1-43ac-bb9e-9730e6395b51'},
       'ResultReuseConfiguration': {'ResultReuseByAgeConfiguration': {'Enabled': False}},
       'QueryExecutionContext': {'Database': 'aws_sdk_pandas'},
       'Status': {'State': 'SUCCEEDED',
                  'SubmissionDateTime': datetime.datetime(2023, 3, 16, 10, 40, 8, 612000, tzinfo=tzlocal()),
                  'CompletionDateTime': datetime.datetime(2023, 3, 16, 10, 40, 11, 143000, tzinfo=tzlocal())},
       'Statistics': {'EngineExecutionTimeInMillis': 2242,
                      'DataScannedInBytes': 0,
                      'DataManifestLocation': 's3://aws-athena-query-results-...-us-east-1/e339fc2-9db1-'
       ↪_43ac-bb9e-9730e6395b51-manifest.csv',
                      'TotalExecutionTimeInMillis': 2531,

```

(continues on next page)

(continued from previous page)

```
'QueryQueueTimeInMillis': 241,
'QueryPlanningTimeInMillis': 179,
'ServiceProcessingTimeInMillis': 48,
'ResultReuseInformation': {'ReusedPreviousResult': False}},
'WorkGroup': 'primary',
'EngineVersion': {'SelectedEngineVersion': 'Athena engine version 3',
'EffectiveEngineVersion': 'Athena engine version 3'}}}
```

```
[54]: wr.athena.start_query_execution(
    sql=f"INSERT INTO {glue_table} VALUES (4, 'Anne'), (5, 'Jacob'), (6, 'Leon')",
    database=glue_database,
    wait=True,
)
[54]: {'QueryExecutionId': '922c8f02-4c00-4050-b4a7-7016809efa2b',
'Query': "INSERT INTO iceberg_test VALUES (4, 'Anne'), (5, 'Jacob'), (6, 'Leon')",
'StatementType': 'DML',
'ResultConfiguration': {'OutputLocation': 's3://aws-athena-query-results-...-us-east-1/922c8f02-4c00-4050-b4a7-7016809efa2b'},
'ResultReuseConfiguration': {'ResultReuseByAgeConfiguration': {'Enabled': False}},
'QueryExecutionContext': {'Database': 'aws_sdk_pandas'},
'Status': {'State': 'SUCCEEDED',
'SubmissionDateTime': datetime.datetime(2023, 3, 16, 10, 40, 24, 582000, tzinfo=tzlocal()),
'CompletionDateTime': datetime.datetime(2023, 3, 16, 10, 40, 27, 352000, tzinfo=tzlocal())},
'Statistics': {'EngineExecutionTimeInMillis': 2414,
'DataScannedInBytes': 0,
'DataManifestLocation': 's3://aws-athena-query-results-...-us-east-1/922c8f02-4c00-4050-b4a7-7016809efa2b-manifest.csv',
'TotalExecutionTimeInMillis': 2770,
'QueryQueueTimeInMillis': 329,
'QueryPlanningTimeInMillis': 189,
'ServiceProcessingTimeInMillis': 27,
'ResultReuseInformation': {'ReusedPreviousResult': False}},
'WorkGroup': 'primary',
'EngineVersion': {'SelectedEngineVersion': 'Athena engine version 3',
'EffectiveEngineVersion': 'Athena engine version 3'}}}
```

## Query

```
[65]: wr.athena.read_sql_query(
    sql=f'SELECT * FROM "{glue_table}"',
    database=glue_database,
    ctas_approach=False,
    unload_approach=False,
)
[65]:   id      name
  0   1      John
  1   4      Anne
```

(continues on next page)

(continued from previous page)

```

2 2     Lily
3 3   Richard
4 5     Jacob
5 6     Leon

```

## Read query metadata

In a SELECT query, you can use the following properties after `table_name` to query Iceberg table metadata:

- `$files` Shows a table's current data files
- `$manifests` Shows a table's current file manifests
- `$history` Shows a table's history
- `$partitions` Shows a table's current partitions

```
[55]: wr.athena.read_sql_query(
    sql=f'SELECT * FROM "{glue_table}$$files"',
    database=glue_database,
    ctas_approach=False,
    unload_approach=False,
)
[55]: content                               file_path file_format \
0      0 s3://.../iceberg_test/data/089a...    PARQUET
1      0 s3://.../iceberg_test/data/5736...    PARQUET

record_count  file_size_in_bytes  column_sizes value_counts \
0            3                 360  {1=48, 2=63}  {1=3, 2=3}
1            3                 355  {1=48, 2=61}  {1=3, 2=3}

null_value_counts  nan_value_counts  lower_bounds  upper_bounds \
0  {1=0, 2=0}          {}  {1=1, 2=John}  {1=3, 2=Richard}
1  {1=0, 2=0}          {}  {1=4, 2=Anne}  {1=6, 2=Leon}

key_metadata  split_offsets  equality_ids
0      <NA>           NaN           NaN
1      <NA>           NaN           NaN
```

```
[56]: wr.athena.read_sql_query(
    sql=f'SELECT * FROM "{glue_table}$$manifests"',
    database=glue_database,
    ctas_approach=False,
    unload_approach=False,
)
[56]: path  length \
0 s3://.../iceberg_test/metadata/...    6538
1 s3://.../iceberg_test/metadata/...    6548

partition_spec_id  added_snapshot_id  added_data_files_count \
0          0  4379263637983206651             1
1          0  2934717851675145063             1
```

(continues on next page)

(continued from previous page)

```

  added_rows_count  existing_data_files_count  existing_rows_count  \
0                  3                      0                      0
1                  3                      0                      0

  deleted_data_files_count  deleted_rows_count partitions
0                      0                      0          []
1                      0                      0          []

```

[58]: df = wr.athena.read\_sql\_query(  
   sql=f'SELECT \* FROM "{glue\_table}\$.history"',  
   database=glue\_database,  
   ctas\_approach=False,  
   unload\_approach=False,  
   )  
  
 # Save snapshot id

```
snapshot_id = df.snapshot_id[0]
```

```
df
```

[58]:

	made_current_at	snapshot_id	parent_id
0	2023-03-16 09:40:10.438000+00:00	2934717851675145063	<NA>
1	2023-03-16 09:40:26.754000+00:00	4379263637983206651	2934717851675144704

```
is_current_ancestor
```

	is_current_ancestor
0	True
1	True

[59]: wr.athena.read\_sql\_query(  
   sql=f'SELECT \* FROM "{glue\_table}\$.partitions"',

```
database=glue_database,  

  ctas_approach=False,  

  unload_approach=False,  

  )
```

[59]:

	record_count	file_count	total_size
0	6	2	715

```
data  
0 {id={min=1, max=6, null_count=0, nan_count=nul...}
```

## Time travel

[60]: wr.athena.read\_sql\_query(  
   sql=f"SELECT \* FROM {glue\_table} FOR TIMESTAMP AS OF (current\_timestamp - interval '5  
   ˓→ ' second)",  
   database=glue\_database,  
   )

[60]:

	id	name
0	1	John

(continues on next page)

(continued from previous page)

```

1  4      Anne
2  2      Lily
3  3  Richard
4  5      Jacob
5  6      Leon

```

## Version travel

```
[61]: wr.athena.read_sql_query(
    sql=f"SELECT * FROM {glue_table} FOR VERSION AS OF {snapshot_id}",
    database=glue_database,
)
[61]:   id      name
  0  1      John
  1  2      Lily
  2  3  Richard
```

## Optimize

The `OPTIMIZE table REWRITE DATA` compaction action rewrites data files into a more optimized layout based on their size and number of associated delete files. For syntax and table property details, see [OPTIMIZE](#).

```
[62]: wr.athena.start_query_execution(
    sql=f"OPTIMIZE {glue_table} REWRITE DATA USING BIN_PACK",
    database=glue_database,
    wait=True,
)
[62]: {'QueryExecutionId': '94666790-03ae-42d7-850a-fae99fa79a68',
  'Query': 'OPTIMIZE iceberg_test REWRITE DATA USING BIN_PACK',
  'StatementType': 'DDL',
  'ResultConfiguration': {'OutputLocation': 's3://aws-athena-query-results-...-us-east-1/tables/94666790-03ae-42d7-850a-fae99fa79a68'},
  'ResultReuseConfiguration': {'ResultReuseByAgeConfiguration': {'Enabled': False}},
  'QueryExecutionContext': {'Database': 'aws_sdk_pandas'},
  'Status': {'State': 'SUCCEEDED'},
  'SubmissionDateTime': datetime.datetime(2023, 3, 16, 10, 49, 42, 857000, tzinfo=tzlocal()),
  'CompletionDateTime': datetime.datetime(2023, 3, 16, 10, 49, 45, 655000, tzinfo=tzlocal()),
  'Statistics': {'EngineExecutionTimeInMillis': 2622,
    'DataScannedInBytes': 220,
    'DataManifestLocation': 's3://aws-athena-query-results-...-us-east-1/tables/94666790-03ae-42d7-850a-fae99fa79a68-manifest.csv',
    'TotalExecutionTimeInMillis': 2798,
    'QueryQueueTimeInMillis': 124,
    'QueryPlanningTimeInMillis': 252,
    'ServiceProcessingTimeInMillis': 52,
    'ResultReuseInformation': {'ReusedPreviousResult': False}},
```

(continues on next page)

(continued from previous page)

```
'WorkGroup': 'primary',
'EngineVersion': {'SelectedEngineVersion': 'Athena engine version 3',
  'EffectiveEngineVersion': 'Athena engine version 3'}}
```

## Vacuum

VACUUM performs [snapshot expiration](#) and [orphan file removal](#). These actions reduce metadata size and remove files not in the current table state that are also older than the retention period specified for the table. For syntax details, see [VACUUM](#).

```
[64]: wr.athena.start_query_execution(
    sql=f"VACUUM {glue_table}",
    database=glue_database,
    wait=True,
)
[64]: {'QueryExecutionId': '717a7de6-b873-49c7-b744-1b0b402f24c9',
  'Query': 'VACUUM iceberg_test',
  'StatementType': 'DML',
  'ResultConfiguration': {'OutputLocation': 's3://aws-athena-query-results-...-us-east-1/717a7de6-b873-49c7-b744-1b0b402f24c9.csv'},
  'ResultReuseConfiguration': {'ResultReuseByAgeConfiguration': {'Enabled': False}},
  'QueryExecutionContext': {'Database': 'aws_sdk_pandas'},
  'Status': {'State': 'SUCCEEDED'},
  'SubmissionDateTime': datetime.datetime(2023, 3, 16, 10, 50, 41, 14000, tzinfo=tzlocal()),
  'CompletionDateTime': datetime.datetime(2023, 3, 16, 10, 50, 43, 441000, tzinfo=tzlocal()),
  'Statistics': {'EngineExecutionTimeInMillis': 2229,
    'DataScannedInBytes': 0,
    'TotalExecutionTimeInMillis': 2427,
    'QueryQueueTimeInMillis': 153,
    'QueryPlanningTimeInMillis': 30,
    'ServiceProcessingTimeInMillis': 45,
    'ResultReuseInformation': {'ReusedPreviousResult': False}},
  'WorkGroup': 'primary',
  'EngineVersion': {'SelectedEngineVersion': 'Athena engine version 3',
    'EffectiveEngineVersion': 'Athena engine version 3'}}
```

## 1.9 API Reference

- [Amazon S3](#)
- [AWS Glue Catalog](#)
- [Amazon Athena](#)
- [AWS Lake Formation](#)
- [Amazon Redshift](#)
- [PostgreSQL](#)

- *MySQL*
- *Microsoft SQL Server*
- *Oracle*
- *Data API Redshift*
- *Data API RDS*
- *AWS Glue Data Quality*
- *OpenSearch*
- *Amazon Neptune*
- *DynamoDB*
- *Amazon Timestream*
- *Amazon EMR*
- *Amazon CloudWatch Logs*
- *Amazon QuickSight*
- *AWS STS*
- *AWS Secrets Manager*
- *Amazon Chime*
- *Typing*
- *Global Configurations*
- *Distributed - Ray*

### 1.9.1 Amazon S3

<code>copy_objects(paths, source_path, target_path)</code>	Copy a list of S3 objects to another S3 directory.
<code>delete_objects(path[, use_threads, ...])</code>	Delete Amazon S3 objects from a received S3 prefix or list of S3 objects paths.
<code>describe_objects(path[, version_id, ...])</code>	Describe Amazon S3 objects from a received S3 prefix or list of S3 objects paths.
<code>does_object_exist(path[, ...])</code>	Check if object exists on S3.
<code>download(path, local_file[, version_id, ...])</code>	Download file from a received S3 path to local file.
<code>get_bucket_region(bucket[, boto3_session])</code>	Get bucket region name.
<code>list_buckets([boto3_session])</code>	List Amazon S3 buckets.
<code>list_directories(path[, chunked, ...])</code>	List Amazon S3 objects from a prefix.
<code>list_objects(path[, suffix, ignore_suffix, ...])</code>	List Amazon S3 objects from a prefix.
<code>merge_datasets(source_path, target_path[, ...])</code>	Merge a source dataset into a target dataset.
<code>read_csv()</code>	Read CSV file(s) from a received S3 prefix or list of S3 objects paths.
<code>read_deltalake([path, version, partitions, ...])</code>	Load a Deltalake table data from an S3 path.
<code>read_excel(path[, version_id, use_threads, ...])</code>	Read EXCEL file(s) from a received S3 path.
<code>read_fwf()</code>	Read fixed-width formatted file(s) from a received S3 prefix or list of S3 objects paths.
<code>read_json()</code>	Read JSON file(s) from a received S3 prefix or list of S3 objects paths.
<code>read_parquet()</code>	Read Parquet file(s) from an S3 prefix or list of S3 objects paths.
<code>read_parquet_metadata(path[, dataset, ...])</code>	Read Apache Parquet file(s) metadata from an S3 prefix or list of S3 objects paths.
<code>read_parquet_table()</code>	Read Apache Parquet table registered in the AWS Glue Catalog.
<code>select_query(sql, path, input_serialization, ...)</code>	Filter contents of Amazon S3 objects based on SQL statement.
<code>size_objects(path[, version_id, ...])</code>	Get the size (ContentLength) in bytes of Amazon S3 objects from a received S3 prefix or list of S3 objects paths.
<code>store_parquet_metadata(path, database, table)</code>	Infer and store parquet metadata on AWS Glue Catalog.
<code>to_csv(df[, path, sep, index, columns, ...])</code>	Write CSV file or dataset on Amazon S3.
<code>to_excel(df, path[, boto3_session, ...])</code>	Write EXCEL file on Amazon S3.
<code>to_json(dff[, path, index, columns, ...])</code>	Write JSON file on Amazon S3.
<code>to_parquet(df[, path, index, compression, ...])</code>	Write Parquet file or dataset on Amazon S3.
<code>upload(local_file, path[, use_threads, ...])</code>	Upload file from a local file to received S3 path.
<code>wait_objects_exist(paths[, delay, ...])</code>	Wait Amazon S3 objects exist.
<code>wait_objects_not_exist(paths[, delay, ...])</code>	Wait Amazon S3 objects not exist.

#### awswrangler.s3.copy\_objects

```
awswrangler.s3.copy_objects(paths: List[str], source_path: str, target_path: str, replace_filenames: Dict[str, str] | None = None, use_threads: bool | int = True, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None) → List[str]
```

Copy a list of S3 objects to another S3 directory.

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

---

**Note:** Following arguments are not supported in distributed mode with engine *EngineEnum.RAY*:

- boto3\_session
- 

### Parameters

- **paths** (*List[str]*) – List of S3 objects paths (e.g. [s3://bucket/dir0/key0, s3://bucket/dir0/key1]).
- **source\_path** (*str*,) – S3 Path for the source directory.
- **target\_path** (*str*,) – S3 Path for the target directory.
- **replace\_filenames** (*Dict[str, str], optional*) – e.g. {"old\_name.csv": "new\_name.csv", "old\_name2.csv": "new\_name2.csv"}
- **use\_threads** (*bool, int*) – True to enable concurrent requests, False to disable multiple threads. If enabled os.cpu\_count() will be used as the max number of threads. If integer is provided, specified number is used.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to botocore requests. e.g. s3\_additional\_kwargs={‘ServerSideEncryption’: ‘aws:kms’, ‘SSEKMSKeyId’: ‘YOUR\_KMS\_KEY\_ARN’}

### Returns

List of new objects paths.

### Return type

*List[str]*

## Examples

### Copying

```
>>> import awswrangler as wr
>>> wr.s3.copy_objects(
...     paths=["s3://bucket0/dir0/key0", "s3://bucket0/dir0/key1"],
...     source_path="s3://bucket0/dir0/",
...     target_path="s3://bucket1/dir1/"
... )
["s3://bucket1/dir1/key0", "s3://bucket1/dir1/key1"]
```

### Copying with a KMS key

```
>>> import awswrangler as wr
>>> wr.s3.copy_objects(
...     paths=["s3://bucket0/dir0/key0", "s3://bucket0/dir0/key1"],
...     source_path="s3://bucket0/dir0/",
...     target_path="s3://bucket1/dir1/",
...     s3_additional_kwargs={
...         'ServerSideEncryption': 'aws:kms',
...         'SSEKMSKeyId': 'YOUR_KMS_KEY_ARN'
...     }
... )
```

(continues on next page)

(continued from previous page)

```
... )
["s3://bucket1/dir1/key0", "s3://bucket1/dir1/key1"]
```

## awswrangler.s3.delete\_objects

`awswrangler.s3.delete_objects(path: str | List[str], use_threads: bool | int = True, last_modified_begin: datetime | None = None, last_modified_end: datetime | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, boto3_session: Session | None = None) → None`

Delete Amazon S3 objects from a received S3 prefix or list of S3 objects paths.

This function accepts Unix shell-style wildcards in the path argument. \* (matches everything), ? (matches any single character), [seq] (matches any character in seq), [!seq] (matches any character not in seq). If you want to use a path which includes Unix shell-style wildcard characters (\*, ?, []), you can use `glob.escape(path)` before passing the path to this function.

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

**Note:** The filter by `last_modified begin` `last_modified end` is applied after list all S3 files

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
- 

### Parameters

- **path** (`Union[str, List[str]]`) – S3 prefix (accepts Unix shell-style wildcards) (e.g. `s3://bucket/prefix`) or list of S3 objects paths (e.g. `[s3://bucket/key0, s3://bucket/key1]`).
- **use\_threads** (`bool, int`) – True to enable concurrent requests, False to disable multiple threads. If enabled `os.cpu_count()` will be used as the max number of threads. If integer is provided, specified number is used.
- **last\_modified\_begin** – Filter the s3 files by the Last modified date of the object. The filter is applied only after list all s3 files.
- **last\_modified\_end** (`datetime, optional`) – Filter the s3 files by the Last modified date of the object. The filter is applied only after list all s3 files.
- **s3\_additional\_kwargs** (`Optional[Dict[str, Any]]`) – Forwarded to botocore requests. e.g. `s3_additional_kwargs={'RequestPayer': 'requester'}`
- **boto3\_session** (`boto3.Session(), optional`) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

### Returns

None.

### Return type

None

## Examples

```
>>> import awswrangler as wr
>>> wr.s3.delete_objects(['s3://bucket/key0', 's3://bucket/key1']) # Delete both objects
>>> wr.s3.delete_objects('s3://bucket/prefix') # Delete all objects under the received prefix
```

### awswrangler.s3.describe\_objects

```
awswrangler.s3.describe_objects(path: str | List[str], version_id: str | Dict[str, str] | None = None, use_threads: bool | int = True, last_modified_begin: datetime | None = None, last_modified_end: datetime | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, boto3_session: Session | None = None) → Dict[str, Dict[str, Any]]
```

Describe Amazon S3 objects from a received S3 prefix or list of S3 objects paths.

Fetch attributes like ContentLength, DeleteMarker, last\_modified, ContentType, etc. The full list of attributes can be explored under the boto3 head\_object documentation: [https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/s3.html#S3.Client.head\\_object](https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/s3.html#S3.Client.head_object)

This function accepts Unix shell-style wildcards in the path argument. \* (matches everything), ? (matches any single character), [seq] (matches any character in seq), [!seq] (matches any character not in seq). If you want to use a path which includes Unix shell-style wildcard characters (\*, ?, /), you can use `glob.escape(path)` before passing the path to this function.

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

**Note:** The filter by `last_modified begin` `last_modified end` is applied after list all S3 files

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
  - `s3_additional_kwargs`
- 

## Parameters

- **path** (`Union[str, List[str]]`) – S3 prefix (accepts Unix shell-style wildcards) (e.g. `s3://bucket/prefix`) or list of S3 objects paths (e.g. `[s3://bucket/key0, s3://bucket/key1]`).
- **version\_id** (`Optional[Union[str, Dict[str, str]]]`) – Version id of the object or mapping of object path to version id. (e.g. `{'s3://bucket/key0': '121212', 's3://bucket/key1': '343434'}`)
- **use\_threads** (`bool, int`) – True to enable concurrent requests, False to disable multiple threads. If enabled `os.cpu_count()` will be used as the max number of threads. If integer is provided, specified number is used.
- **last\_modified\_begin** – Filter the s3 files by the Last modified date of the object. The filter is applied only after list all s3 files.

- **last\_modified\_end** (*datetime, optional*) – Filter the s3 files by the Last modified date of the object. The filter is applied only after list all s3 files.
- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to botocore requests. e.g. `s3_additional_kwargs={‘RequestPayer’: ‘requester’}`
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

**Returns**

Return a dictionary of objects returned from `head_objects` where the key is the object path. The response object can be explored here: [https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/s3.html#S3.Client.head\\_object](https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/s3.html#S3.Client.head_object)

**Return type**

`Dict[str, Dict[str, Any]]`

**Examples**

```
>>> import awswrangler as wr
>>> descs0 = wr.s3.describe_objects(['s3://bucket/key0', 's3://bucket/key1']) # Describe both objects
>>> descs1 = wr.s3.describe_objects('s3://bucket/prefix') # Describe all objects under the prefix
```

**awswrangler.s3.does\_object\_exist**

`awswrangler.s3.does_object_exist(path: str, s3_additional_kwargs: Dict[str, Any] | None = None, boto3_session: Session | None = None, version_id: str | None = None) → bool`

Check if object exists on S3.

**Parameters**

- **path** (*str*) – S3 path (e.g. `s3://bucket/key`).
- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to botocore requests. e.g. `s3_additional_kwargs={‘RequestPayer’: ‘requester’}`
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.
- **version\_id** (*str, optional*) – Specific version of the object that should exist.

**Returns**

True if exists, False otherwise.

**Return type**

`bool`

## Examples

Using the default boto3 session

```
>>> import awswrangler as wr
>>> wr.s3.does_object_exist('s3://bucket/key_real')
True
>>> wr.s3.does_object_exist('s3://bucket/key_unreal')
False
```

Using a custom boto3 session

```
>>> import boto3
>>> import awswrangler as wr
>>> wr.s3.does_object_exist('s3://bucket/key_real', boto3_session=boto3.Session())
True
>>> wr.s3.does_object_exist('s3://bucket/key_unreal', boto3_session=boto3.Session())
False
```

## awswrangler.s3.download

`awswrangler.s3.download(path: str, local_file: str | Any, version_id: str | None = None, use_threads: bool | int = True, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None) → None`

Download file from a received S3 path to local file.

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

### Parameters

- **path** (`str`) – S3 path (e.g. `s3://bucket/key0`).
- **local\_file** (`Union[str, Any]`) – A file-like object in binary mode or a path to local file (e.g. `./local/path/to/key0`).
- **version\_id** (`Optional[str]`) – Version id of the object.
- **use\_threads** (`bool, int`) – True to enable concurrent requests, False to disable multiple threads. If enabled `os.cpu_count()` will be used as the max number of threads. If integer is provided, specified number is used.
- **boto3\_session** (`boto3.Session(), optional`) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.
- **s3\_additional\_kwargs** (`Optional[Dict[str, Any]]`) – Forward to botocore requests, only “SSECustomerAlgorithm”, “SSECustomerKey” and “RequestPayer” arguments will be considered.

### Return type

`None`

## Examples

Downloading a file using a path to local file

```
>>> import awswrangler as wr
>>> wr.s3.download(path='s3://bucket/key', local_file='./key')
```

Downloading a file using a file-like object

```
>>> import awswrangler as wr
>>> with open(file='./key', mode='wb') as local_f:
>>>     wr.s3.download(path='s3://bucket/key', local_file=local_f)
```

## awswrangler.s3.get\_bucket\_region

`awswrangler.s3.get_bucket_region(bucket: str, boto3_session: Session | None = None) → str`

Get bucket region name.

### Parameters

- **bucket (str)** – Bucket name.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Region code (e.g. ‘us-east-1’).

### Return type

str

## Examples

Using the default boto3 session

```
>>> import awswrangler as wr
>>> region = wr.s3.get_bucket_region('bucket-name')
```

Using a custom boto3 session

```
>>> import boto3
>>> import awswrangler as wr
>>> region = wr.s3.get_bucket_region('bucket-name', boto3_session=boto3.Session())
```

## awswrangler.s3.list\_buckets

`awswrangler.s3.list_buckets(boto3_session: Session | None = None) → List[str]`

List Amazon S3 buckets.

### Parameters

**boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session to use, default to None.

### Returns

List of bucket names.

**Return type**

List[str]

**awswrangler.s3.list\_directories**

```
awswrangler.s3.list_directories(path: str, chunked: bool = False, s3_additional_kwargs: Dict[str, Any] | None = None, boto3_session: Session | None = None) → List[str] | Iterator[List[str]]
```

List Amazon S3 objects from a prefix.

This function accepts Unix shell-style wildcards in the path argument. \* (matches everything), ? (matches any single character), [seq] (matches any character in seq), [!seq] (matches any character not in seq). If you want to use a path which includes Unix shell-style wildcard characters (\*, ?, []), you can use *glob.escape(path)* before passing the path to this function.

---

**Note:** Following arguments are not supported in distributed mode with engine *EngineEnum.RAY*:

- `boto3_session`
  - `s3_additional_kwargs`
- 

**Parameters**

- `path (str)` – S3 path (e.g. `s3://bucket/prefix`).
- `chunked (bool)` – If True returns iterator, and a single list otherwise. False by default.
- `s3_additional_kwargs (Optional[Dict[str, Any]])` – Forwarded to botocore requests. e.g. `s3_additional_kwargs={‘RequestPayer’: ‘requester’}`
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

**Returns**

List of objects paths.

**Return type**

Union[List[str], Iterator[List[str]]]

**Examples**

Using the default boto3 session

```
>>> import awswrangler as wr
>>> wr.s3.list_directories('s3://bucket/prefix/')
['s3://bucket/prefix/dir0/', 's3://bucket/prefix/dir1/', 's3://bucket/prefix/dir2/']
```

Using a custom boto3 session

```
>>> import boto3
>>> import awswrangler as wr
>>> wr.s3.list_directories('s3://bucket/prefix/', boto3_session=boto3.Session())
['s3://bucket/prefix/dir0/', 's3://bucket/prefix/dir1/', 's3://bucket/prefix/dir2/']
```

## awswrangler.s3.list\_objects

```
awswrangler.s3.list_objects(path: str, suffix: str | List[str] | None = None, ignore_suffix: str | List[str] | None = None, last_modified_begin: datetime | None = None, last_modified_end: datetime | None = None, ignore_empty: bool = False, chunked: bool = False, s3_additional_kwargs: Dict[str, Any] | None = None, boto3_session: Session | None = None) → List[str] | Iterator[List[str]]
```

List Amazon S3 objects from a prefix.

This function accepts Unix shell-style wildcards in the path argument. \* (matches everything), ? (matches any single character), [seq] (matches any character in seq), [!seq] (matches any character not in seq). If you want to use a path which includes Unix shell-style wildcard characters (\*, ?, []), you can use `glob.escape(path)` before passing the path to this function.

---

**Note:** The filter by last\_modified begin last\_modified end is applied after list all S3 files

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
  - `s3_additional_kwargs`
- 

### Parameters

- **path** (`str`) – S3 path (e.g. `s3://bucket/prefix`).
- **suffix** (`Union[str, List[str], None]`) – Suffix or List of suffixes for filtering S3 keys.
- **ignore\_suffix** (`Union[str, List[str], None]`) – Suffix or List of suffixes for S3 keys to be ignored.
- **last\_modified\_begin** – Filter the s3 files by the Last modified date of the object. The filter is applied only after list all s3 files.
- **last\_modified\_end** (`datetime, optional`) – Filter the s3 files by the Last modified date of the object. The filter is applied only after list all s3 files.
- **ignore\_empty** (`bool`) – Ignore files with 0 bytes.
- **chunked** (`bool`) – If True returns iterator, and a single list otherwise. False by default.
- **s3\_additional\_kwargs** (`Optional[Dict[str, Any]]`) – Forwarded to botocore requests. e.g. `s3_additional_kwargs={‘RequestPayer’: ‘requester’}`
- **boto3\_session** (`boto3.Session(), optional`) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

### Returns

List of objects paths.

### Return type

`Union[List[str], Iterator[List[str]]]`

## Examples

Using the default boto3 session

```
>>> import awswrangler as wr
>>> wr.s3.list_objects('s3://bucket/prefix')
['s3://bucket/prefix0', 's3://bucket/prefix1', 's3://bucket/prefix2']
```

Using a custom boto3 session

```
>>> import boto3
>>> import awswrangler as wr
>>> wr.s3.list_objects('s3://bucket/prefix', boto3_session=boto3.Session())
['s3://bucket/prefix0', 's3://bucket/prefix1', 's3://bucket/prefix2']
```

## awswrangler.s3.merge\_datasets

```
awswrangler.s3.merge_datasets(source_path: str, target_path: str, mode: Literal['append', 'overwrite', 'overwrite_partitions'] = 'append', ignore_empty: bool = False, use_threads: bool | int = True, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None) → List[str]
```

Merge a source dataset into a target dataset.

This function accepts Unix shell-style wildcards in the source\_path argument. \* (matches everything), ? (matches any single character), [seq] (matches any character in seq), [!seq] (matches any character not in seq). If you want to use a path which includes Unix shell-style wildcard characters (\*, ?, []), you can use `glob.escape(source_path)` before passing the path to this function.

---

**Note:** If you are merging tables (S3 datasets + Glue Catalog metadata), remember that you will also need to update your partitions metadata in some cases. (e.g. `wr.athena.repair_table(table='...', database='...')`)

---

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
- 

### Parameters

- `source_path(str, )` – S3 Path for the source directory.
- `target_path(str, )` – S3 Path for the target directory.
- `mode(str, optional)` – append (Default), `overwrite`, `overwrite_partitions`.
- `ignore_empty(bool)` – Ignore files with 0 bytes.
- `use_threads(bool, int)` – True to enable concurrent requests, False to disable multiple threads. If enabled `os.cpu_count()` will be used as the max number of threads. If integer is provided, specified number is used.

- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **s3\_additional\_kwargs** (`Optional[Dict[str, Any]]`) – Forwarded to botocore requests. e.g. `s3_additional_kwargs={‘ServerSideEncryption’: ‘aws:kms’, ‘SSEKMSKeyId’: ‘YOUR_KMS_KEY_ARN’}`

**Returns**

List of new objects paths.

**Return type**

`List[str]`

**Examples**

Merging

```
>>> import awswrangler as wr
>>> wr.s3.merge_datasets(
...     source_path="s3://bucket0/dir0/",
...     target_path="s3://bucket1/dir1/",
...     mode="append"
... )
["s3://bucket1/dir1/key0", "s3://bucket1/dir1/key1"]
```

Merging with a KMS key

```
>>> import awswrangler as wr
>>> wr.s3.merge_datasets(
...     source_path="s3://bucket0/dir0/",
...     target_path="s3://bucket1/dir1/",
...     mode="append",
...     s3_additional_kwargs={
...         'ServerSideEncryption': 'aws:kms',
...         'SSEKMSKeyId': 'YOUR_KMS_KEY_ARN'
...     }
... )
["s3://bucket1/dir1/key0", "s3://bucket1/dir1/key1"]
```

**awswrangler.s3.read\_csv**

```
awswrangler.s3.read_csv(path: str | List[str], *, path_suffix: str | List[str] | None = None, path_ignore_suffix:
                        str | List[str] | None = None, version_id: str | Dict[str, str] | None = None,
                        ignore_empty: bool = True, use_threads: bool | int = True, last_modified_begin:
                        datetime.datetime | None = None, last_modified_end: datetime.datetime | None =
                        None, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] |
                        None = None, chunksize: None = None, dataset: bool = False, partition_filter:
                        Callable[[Dict[str, str]], bool] | None = None, ray_args: RaySettings | None = None,
                        **pandas_kwargs: Any) → DataFrame
```

```
awsrangler.s3.read_csv(path: str | List[str], *, path_suffix: str | List[str] | None = None, path_ignore_suffix: str | List[str] | None = None, version_id: str | Dict[str, str] | None = None, ignore_empty: bool = True, use_threads: bool | int = True, last_modified_begin: datetime.datetime | None = None, last_modified_end: datetime.datetime | None = None, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, chunksize: int, dataset: bool = False, partition_filter: Callable[[Dict[str, str]], bool] | None = None, ray_args: RaySettings | None = None, **pandas_kwargs: Any) → Iterator[pd.DataFrame]

awsrangler.s3.read_csv(path: str | List[str], *, path_suffix: str | List[str] | None = None, path_ignore_suffix: str | List[str] | None = None, version_id: str | Dict[str, str] | None = None, ignore_empty: bool = True, use_threads: bool | int = True, last_modified_begin: datetime.datetime | None = None, last_modified_end: datetime.datetime | None = None, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, chunksize: int | None, dataset: bool = False, partition_filter: Callable[[Dict[str, str]], bool] | None = None, ray_args: RaySettings | None = None, **pandas_kwargs: Any) → pd.DataFrame | Iterator[pd.DataFrame]
```

Read CSV file(s) from a received S3 prefix or list of S3 objects paths.

This function accepts Unix shell-style wildcards in the path argument. \* (matches everything), ? (matches any single character), [seq] (matches any character in seq), [!seq] (matches any character not in seq). If you want to use a path which includes Unix shell-style wildcard characters (\*, ?, []), you can use `glob.escape(path)` before passing the path to this function.

---

**Note:** For partial and gradual reading use the argument `chunksize` instead of `iterator`.

---

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

---

**Note:** The filter by `last_modified begin` `last_modified end` is applied after list all S3 files

---

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
- 

### Parameters

- **path** (`Union[str, List[str]]`) – S3 prefix (accepts Unix shell-style wildcards) (e.g. `s3://bucket/prefix`) or list of S3 objects paths (e.g. `[s3://bucket/key0, s3://bucket/key1]`).
- **path\_suffix** (`Union[str, List[str], None]`) – Suffix or List of suffixes to be read (e.g. `[“.csv”]`). If `None`, will try to read all files. (default)
- **path\_ignore\_suffix** (`Union[str, List[str], None]`) – Suffix or List of suffixes for S3 keys to be ignored.(e.g. `[“_SUCCESS”]`). If `None`, will try to read all files. (default)
- **version\_id** (`Optional[Union[str, Dict[str, str]]]`) – Version id of the object or mapping of object path to version id. (e.g. `{‘s3://bucket/key0’: ‘121212’, ‘s3://bucket/key1’: ‘343434’}`)
- **ignore\_empty** (`bool`) – Ignore files with 0 bytes.

- **use\_threads** (*Union[bool, int]*) – True to enable concurrent requests, False to disable multiple threads. If enabled `os.cpu_count()` will be used as the max number of threads. If integer is provided, specified number is used.
- **last\_modified\_begin** – Filter the s3 files by the Last modified date of the object. The filter is applied only after list all s3 files.
- **last\_modified\_end** (*datetime, optional*) – Filter the s3 files by the Last modified date of the object. The filter is applied only after list all s3 files.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.
- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forward to botocore requests, only “SSECustomerAlgorithm” and “SSECustomerKey” arguments will be considered.
- **chunksize** (*int, optional*) – If specified, return an generator where chunksize is the number of rows to include in each chunk.
- **dataset** (*bool*) – If *True* read a CSV dataset instead of simple file(s) loading all the related partitions as columns.
- **partition\_filter** (*Optional[Callable[[Dict[str, str]], bool]]*) – Callback Function filters to apply on PARTITION columns (PUSH-DOWN filter). This function MUST receive a single argument (`Dict[str, str]`) where keys are partitions names and values are partitions values. Partitions values will be always strings extracted from S3. This function MUST return a bool, True to read the partition or False to ignore it. Ignored if `dataset=False`. E.g `lambda x: True if x["year"] == "2020" and x["month"] == "1" else False` <https://aws-sdk-pandas.readthedocs.io/en/3.0.0/tutorials/023%20-%20Flexible%20Partitions%20Filter.html>
- **ray\_args** (*RaySettings, optional*) – Parameters of the Ray Modin settings. Only used when distributed computing is used with Ray and Modin installed.
- **pandas\_kwargs** – KEYWORD arguments forwarded to `pandas.read_csv()`. You can NOT pass `pandas_kwargs` explicitly, just add valid Pandas arguments in the function call and `awswrangler` will accept it. e.g. `wr.s3.read_csv('s3://bucket/prefix/', sep='|', na_values=['null', 'none'], skip_blank_lines=True)` [https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read\\_csv.html](https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read_csv.html)

#### Returns

Pandas DataFrame or a Generator in case of `chunksize != None`.

#### Return type

`Union[pandas.DataFrame, Generator[pandas.DataFrame, None, None]]`

## Examples

Reading all CSV files under a prefix

```
>>> import awswrangler as wr
>>> df = wr.s3.read_csv(path='s3://bucket/prefix/')
```

Reading all CSV files under a prefix and using `pandas_kwargs`

```
>>> import awswrangler as wr
>>> df = wr.s3.read_csv('s3://bucket/prefix/', sep='|', na_values=['null', 'none'],
   ↴skip_blank_lines=True)
```

Reading all CSV files from a list

```
>>> import awswrangler as wr
>>> df = wr.s3.read_csv(path=['s3://bucket/filename0.csv', 's3://bucket/filename1.
->csv'])
```

Reading in chunks of 100 lines

```
>>> import awswrangler as wr
>>> dfs = wr.s3.read_csv(path=['s3://bucket/filename0.csv', 's3://bucket/filename1.
->csv'], chunksize=100)
>>> for df in dfs:
>>>     print(df) # 100 lines Pandas DataFrame
```

Reading CSV Dataset with PUSH-DOWN filter over partitions

```
>>> import awswrangler as wr
>>> my_filter = lambda x: True if x["city"].startswith("new") else False
>>> df = wr.s3.read_csv(path, dataset=True, partition_filter=my_filter)
```

## awswrangler.s3.read\_deltalake

`awswrangler.s3.read_deltalake(path: str | None = None, version: int | None = None, partitions:
List[Tuple[str, str, Any]] | None = None, columns: List[str] | None = None,
without_files: bool = False, use_threads: bool = True, boto3_session:
Session | None = None, s3_additional_kwargs: Dict[str, str] | None = None,
pyarrow_additional_kwargs: Dict[str, Any] | None = None) → DataFrame`

Load a Deltalake table data from an S3 path.

This function requires the [deltalake package](#). See the [How to load a Delta table](#) guide for loading instructions.

### Parameters

- **path** (*Optional[str]*) – The path of the DeltaTable.
- **version** (*Optional[int]*) – The version of the DeltaTable.
- **partitions** (*Optional[List[Tuple[str, str, Any]]]*) – A list of partition filters, see `help(DeltaTable.files_by_partitions)` for filter syntax.
- **columns** (*Optional[List[str]]*) – The columns to project. This can be a list of column names to include (order and duplicates are preserved).
- **without\_files** (*bool*) – If True, load the table without tracking files (memory-friendly). Some append-only applications might not need to track files.
- **use\_threads** (*bool*) – True to enable concurrent requests, False to disable multiple threads. When enabled, `os.cpu_count()` is used as the max number of threads.
- **boto3\_session** (*Optional[boto3.Session()]*) – Boto3 Session. If None, the default boto3 session is used.
- **s3\_additional\_kwargs** (*Optional[Dict[str, str]]*) – Forwarded to the Delta Table class for the storage options of the S3 backend.
- **pyarrow\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to the PyArrow to\_pandas method.

**Returns**

**df** – DataFrame with the results.

**Return type**

pd.DataFrame

See also:

**deltalake.DeltaTable**

Create a DeltaTable instance with the deltalake library.

**awswrangler.s3.read\_excel**

```
awswrangler.s3.read_excel(path: str, version_id: str | None = None, use_threads: bool | int = True,
                           boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] |
                           None = None, **pandas_kwargs: Any) → DataFrame
```

Read EXCEL file(s) from a received S3 path.

**Note:** This function accepts any Pandas's read\_excel() argument. [https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read\\_excel.html](https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read_excel.html)

**Note:** Depending on the file extension ('xlsx', 'xls', 'odf'...), an additional library might have to be installed first.

**Note:** In case of *use\_threads=True* the number of threads that will be spawned will be gotten from os.cpu\_count().

**Parameters**

- **path (str)** – S3 path (e.g. s3://bucket/key.xlsx).
- **version\_id (Optional[str])** – Version id of the object.
- **use\_threads (Union[bool, int])** – True to enable concurrent requests, False to disable multiple threads. If enabled os.cpu\_count() will be used as the max number of threads. If given an int will use the given amount of threads. If integer is provided, specified number is used.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **s3\_additional\_kwargs (Optional[Dict[str, Any]])** – Forward to botocore requests, only "SSECustomerAlgorithm" and "SSECustomerKey" arguments will be considered.
- **pandas\_kwargs** – KEYWORD arguments forwarded to pandas.read\_excel(). You can NOT pass *pandas\_kwargs* explicit, just add valid Pandas arguments in the function call and awswrangler will accept it. e.g. wr.s3.read\_excel("s3://bucket/key.xlsx", na\_rep="", verbose=True) [https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read\\_excel.html](https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read_excel.html)

**Returns**

Pandas DataFrame.

**Return type**  
pandas.DataFrame

## Examples

Reading an EXCEL file

```
>>> import awswrangler as wr
>>> df = wr.s3.read_excel('s3://bucket/key.xlsx')
```

## awswrangler.s3.read\_fwf

```
awswrangler.s3.read_fwf(path: str | List[str], path_suffix: str | List[str] | None = None, path_ignore_suffix: str | List[str] | None = None, version_id: str | Dict[str, str] | None = None, ignore_empty: bool = True, use_threads: bool | int = True, last_modified_begin: datetime.datetime | None = None, last_modified_end: datetime.datetime | None = None, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, chunksize: None = None, dataset: bool = False, partition_filter: Callable[[Dict[str, str]], bool] | None = None, ray_args: RaySettings | None = None, **pandas_kwargs: Any) → DataFrame

awswrangler.s3.read_fwf(path: str | List[str], *, path_suffix: str | List[str] | None = None, path_ignore_suffix: str | List[str] | None = None, version_id: str | Dict[str, str] | None = None, ignore_empty: bool = True, use_threads: bool | int = True, last_modified_begin: datetime.datetime | None = None, last_modified_end: datetime.datetime | None = None, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, chunkszie: int, dataset: bool = False, partition_filter: Callable[[Dict[str, str]], bool] | None = None, ray_args: RaySettings | None = None, **pandas_kwargs: Any) → Iterator[pd.DataFrame]

awswrangler.s3.read_fwf(path: str | List[str], *, path_suffix: str | List[str] | None = None, path_ignore_suffix: str | List[str] | None = None, version_id: str | Dict[str, str] | None = None, ignore_empty: bool = True, use_threads: bool | int = True, last_modified_begin: datetime.datetime | None = None, last_modified_end: datetime.datetime | None = None, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, chunkszie: int | None, dataset: bool = False, partition_filter: Callable[[Dict[str, str]], bool] | None = None, ray_args: RaySettings | None = None, **pandas_kwargs: Any) → pd.DataFrame | Iterator[pd.DataFrame]
```

Read fixed-width formatted file(s) from a received S3 prefix or list of S3 objects paths.

This function accepts Unix shell-style wildcards in the path argument. \* (matches everything), ? (matches any single character), [seq] (matches any character in seq), [!seq] (matches any character not in seq). If you want to use a path which includes Unix shell-style wildcard characters (\*, ?, /), you can use `glob.escape(path)` before passing the path to this function.

---

**Note:** For partial and gradual reading use the argument `chunksize` instead of `iterator`.

---

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

---

**Note:** The filter by last\_modified begin last\_modified end is applied after list all S3 files

---



---

**Note:** Following arguments are not supported in distributed mode with engine *EngineEnum.RAY*:

- boto3\_session
- 

### Parameters

- **path** (*Union[str, List[str]]*) – S3 prefix (accepts Unix shell-style wildcards) (e.g. s3://bucket/prefix) or list of S3 objects paths (e.g. [s3://bucket/key0, s3://bucket/key1]).
- **path\_suffix** (*Union[str, List[str], None]*) – Suffix or List of suffixes to be read (e.g. [“.txt”]). If None, will try to read all files. (default)
- **path\_ignore\_suffix** (*Union[str, List[str], None]*) – Suffix or List of suffixes for S3 keys to be ignored.(e.g. [“\_SUCCESS”]). If None, will try to read all files. (default)
- **version\_id** (*Optional[Union[str, Dict[str, str]]]*) – Version id of the object or mapping of object path to version id. (e.g. {‘s3://bucket/key0’: ‘121212’, ‘s3://bucket/key1’: ‘343434’})
- **ignore\_empty** (*bool*) – Ignore files with 0 bytes.
- **use\_threads** (*Union[bool, int]*) – True to enable concurrent requests, False to disable multiple threads. If enabled os.cpu\_count() will be used as the max number of threads. If integer is provided, specified number is used.
- **last\_modified\_begin** – Filter the s3 files by the Last modified date of the object. The filter is applied only after list all s3 files.
- **last\_modified\_end** (*datetime, optional*) – Filter the s3 files by the Last modified date of the object. The filter is applied only after list all s3 files.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forward to botocore requests, only “SSECustomerAlgorithm” and “SSECustomerKey” arguments will be considered.
- **chunksize** (*int, optional*) – If specified, return an generator where chunksize is the number of rows to include in each chunk.
- **dataset** (*bool*) – If *True* read a FWF dataset instead of simple file(s) loading all the related partitions as columns.
- **partition\_filter** (*Optional[Callable[[Dict[str, str]], bool]]*) – Callback Function filters to apply on PARTITION columns (PUSH-DOWN filter). This function MUST receive a single argument (Dict[str, str]) where keys are partitions names and values are partitions values. Partitions values will be always strings extracted from S3. This function MUST return a bool, True to read the partition or False to ignore it. Ignored if *dataset=False*. E.g lambda x: True if x[“year”] == “2020” and x[“month”] == “1” else False <https://aws-sdk-pandas.readthedocs.io/en/3.0.0/tutorials/023%20-%20Flexible%20Partitions%20Filter.html>
- **ray\_args** (*RaySettings, optional*) – Parameters of the Ray Modin settings. Only used when distributed computing is used with Ray and Modin installed.

- **pandas\_kwargs** – KEYWORD arguments forwarded to pandas.read\_fwf(). You can NOT pass *pandas\_kwargs* explicit, just add valid Pandas arguments in the function call and awswrangler will accept it. e.g. wr.s3.read\_fwf(path='s3://bucket/prefix/', widths=[1, 3], names=['c0', 'c1']) [https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read\\_fwf.html](https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read_fwf.html)

**Returns**

Pandas DataFrame or a Generator in case of *chunksize* != *None*.

**Return type**

Union[pandas.DataFrame, Generator[pandas.DataFrame, None, None]]

## Examples

Reading all fixed-width formatted (FWF) files under a prefix

```
>>> import awswrangler as wr
>>> df = wr.s3.read_fwf(path='s3://bucket/prefix/', widths=[1, 3], names=['c0', 'c1'])
```

Reading all fixed-width formatted (FWF) files from a list

```
>>> import awswrangler as wr
>>> df = wr.s3.read_fwf(path=['s3://bucket/0.txt', 's3://bucket/1.txt'], widths=[1, 3], names=['c0', 'c1'])
```

Reading in chunks of 100 lines

```
>>> import awswrangler as wr
>>> dfs = wr.s3.read_fwf(
...     path=['s3://bucket/0.txt', 's3://bucket/1.txt'],
...     chunksize=100,
...     widths=[1, 3],
...     names=["c0", "c1"]
... )
>>> for df in dfs:
>>>     print(df) # 100 lines Pandas DataFrame
```

Reading FWF Dataset with PUSH-DOWN filter over partitions

```
>>> import awswrangler as wr
>>> my_filter = lambda x: True if x["city"].startswith("new") else False
>>> df = wr.s3.read_fwf(path, dataset=True, partition_filter=my_filter, widths=[1, 3], names=["c0", "c1"])
```

**awswrangler.s3.read\_json**

```
awswrangler.s3.read_json(path: str | List[str], path_suffix: str | List[str] | None = None, path_ignore_suffix:
                           str | List[str] | None = None, version_id: str | Dict[str, str] | None = None,
                           ignore_empty: bool = True, orient: str = 'columns', use_threads: bool | int = True,
                           last_modified_begin: datetime.datetime | None = None, last_modified_end:
                           datetime.datetime | None = None, boto3_session: Session | None = None,
                           s3_additional_kwargs: Dict[str, Any] | None = None, chunksize: None = None,
                           dataset: bool = False, partition_filter: Callable[[Dict[str, str]], bool] | None =
                           None, ray_args: RaySettings | None = None, **pandas_kwargs: Any) →
                           DataFrame

awswrangler.s3.read_json(path: str | List[str], *, path_suffix: str | List[str] | None = None, path_ignore_suffix:
                           str | List[str] | None = None, version_id: str | Dict[str, str] | None = None,
                           ignore_empty: bool = True, orient: str = 'columns', use_threads: bool | int = True,
                           last_modified_begin: datetime.datetime | None = None, last_modified_end:
                           datetime.datetime | None = None, boto3_session: Session | None = None,
                           s3_additional_kwargs: Dict[str, Any] | None = None, chunksize: int, dataset: bool =
                           False, partition_filter: Callable[[Dict[str, str]], bool] | None = None, ray_args:
                           RaySettings | None = None, **pandas_kwargs: Any) → Iterator[pd.DataFrame]

awswrangler.s3.read_json(path: str | List[str], *, path_suffix: str | List[str] | None = None, path_ignore_suffix:
                           str | List[str] | None = None, version_id: str | Dict[str, str] | None = None,
                           ignore_empty: bool = True, orient: str = 'columns', use_threads: bool | int = True,
                           last_modified_begin: datetime.datetime | None = None, last_modified_end:
                           datetime.datetime | None = None, boto3_session: Session | None = None,
                           s3_additional_kwargs: Dict[str, Any] | None = None, chunksize: int | None, dataset:
                           bool = False, partition_filter: Callable[[Dict[str, str]], bool] | None = None,
                           ray_args: RaySettings | None = None, **pandas_kwargs: Any) → pd.DataFrame |
                           Iterator[pd.DataFrame]
```

Read JSON file(s) from a received S3 prefix or list of S3 objects paths.

This function accepts Unix shell-style wildcards in the path argument. \* (matches everything), ? (matches any single character), [seq] (matches any character in seq), [!seq] (matches any character not in seq). If you want to use a path which includes Unix shell-style wildcard characters (\*, ?, /), you can use `glob.escape(path)` before passing the path to this function.

---

**Note:** For partial and gradual reading use the argument `chunksize` instead of `iterator`.

---



---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---



---

**Note:** The filter by `last_modified begin` `last_modified end` is applied after list all S3 files

---



---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

---

- `boto3_session`
- 

### Parameters

- **path** (*Union[str, List[str]]*) – S3 prefix (accepts Unix shell-style wildcards) (e.g. `s3://bucket/prefix`) or list of S3 objects paths (e.g. `[s3://bucket/key0, s3://bucket/key1]`).
- **path\_suffix** (*Union[str, List[str], None]*) – Suffix or List of suffixes to be read (e.g. `[".json"]`). If `None`, will try to read all files. (default)
- **path\_ignore\_suffix** (*Union[str, List[str], None]*) – Suffix or List of suffixes for S3 keys to be ignored.(e.g. `["_SUCCESS"]`). If `None`, will try to read all files. (default)
- **version\_id** (*Optional[Union[str, Dict[str, str]]]*) – Version id of the object or mapping of object path to version id. (e.g. `{'s3://bucket/key0': '121212', 's3://bucket/key1': '343434'}`)
- **ignore\_empty** (*bool*) – Ignore files with 0 bytes.
- **orient** (*str*) – Same as Pandas: [https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read\\_json.html](https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read_json.html)
- **use\_threads** (*Union[bool, int]*) – True to enable concurrent requests, False to disable multiple threads. If enabled `os.cpu_count()` will be used as the max number of threads. If integer is provided, specified number is used.
- **last\_modified\_begin** – Filter the s3 files by the Last modified date of the object. The filter is applied only after list all s3 files.
- **last\_modified\_end** (*datetime, optional*) – Filter the s3 files by the Last modified date of the object. The filter is applied only after list all s3 files.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive `None`.
- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forward to botocore requests, only “SSECustomerAlgorithm” and “SSECustomerKey” arguments will be considered.
- **chunksize** (*int, optional*) – If specified, return an generator where chunksize is the number of rows to include in each chunk.
- **dataset** (*bool*) – If `True` read a JSON dataset instead of simple file(s) loading all the related partitions as columns. If `True`, the `lines=True` will be assumed by default.
- **partition\_filter** (*Optional[Callable[[Dict[str, str]], bool]]*) – Callback Function filters to apply on PARTITION columns (PUSH-DOWN filter). This function MUST receive a single argument (`Dict[str, str]`) where keys are partitions names and values are partitions values. Partitions values will be always strings extracted from S3. This function MUST return a bool, `True` to read the partition or `False` to ignore it. Ignored if `dataset=False`. E.g `lambda x: True if x["year"] == "2020" and x["month"] == "1" else False` <https://aws-sdk-pandas.readthedocs.io/en/3.0.0/tutorials/023%20-%20Flexible%20Partitions%20Filter.html>
- **ray\_args** (*RaySettings, optional*) – Parameters of the Ray Modin settings. Only used when distributed computing is used with Ray and Modin installed.
- **pandas\_kwargs** – KEYWORD arguments forwarded to `pandas.read_json()`. You can NOT pass `pandas_kwargs` explicit, just add valid Pandas arguments in the function call and `awswrangler` will accept it. e.g. `wr.s3.read_json('s3://bucket/prefix/', lines=True, keep_default_dates=True)` [https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read\\_json.html](https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read_json.html)

## Returns

Pandas DataFrame or a Generator in case of `chunksize != None`.

**Return type**

Union[pandas.DataFrame, Generator[pandas.DataFrame, None, None]]

**Examples**

Reading all JSON files under a prefix

```
>>> import awswrangler as wr
>>> df = wr.s3.read_json(path='s3://bucket/prefix/')
```

Reading all CSV files under a prefix and using pandas\_kwarg

```
>>> import awswrangler as wr
>>> df = wr.s3.read_json('s3://bucket/prefix/', lines=True, keep_default_dates=True)
```

Reading all JSON files from a list

```
>>> import awswrangler as wr
>>> df = wr.s3.read_json(path=['s3://bucket/filename0.json', 's3://bucket/filename1.
    ↪json'])
```

Reading in chunks of 100 lines

```
>>> import awswrangler as wr
>>> dfs = wr.s3.read_json(path=['s3://bucket/0.json', 's3://bucket/1.json'], u
    ↪chunksize=100, lines=True)
>>> for df in dfs:
>>>     print(df) # 100 lines Pandas DataFrame
```

Reading JSON Dataset with PUSH-DOWN filter over partitions

```
>>> import awswrangler as wr
>>> my_filter = lambda x: True if x["city"].startswith("new") else False
>>> df = wr.s3.read_json(path, dataset=True, partition_filter=my_filter)
```

**awswrangler.s3.read\_parquet**

`awswrangler.s3.read_parquet(path: str | List[str], path_root: str | None = None, dataset: bool = False, path_suffix: str | List[str] | None = None, path_ignore_suffix: str | List[str] | None = None, ignore_empty: bool = True, partition_filter: Callable[[Dict[str, str]], bool] | None = None, columns: List[str] | None = None, validate_schema: bool = False, coerce_int96_timestamp_unit: str | None = None, last_modified_begin: datetime.datetime | None = None, last_modified_end: datetime.datetime | None = None, version_id: str | Dict[str, str] | None = None, chunked: Literal[False] = False, use_threads: bool | int = True, ray_args: RayReadParquetSettings | None = None, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → DataFrame`

```
awswrangler.s3.read_parquet(path: str | List[str], *, path_root: str | None = None, dataset: bool = False,
    path_suffix: str | List[str] | None = None, path_ignore_suffix: str | List[str] | None = None, ignore_empty: bool = True, partition_filter: Callable[[Dict[str, str]], bool] | None = None, columns: List[str] | None = None, validate_schema: bool = False, coerce_int96_timestamp_unit: str | None = None, last_modified_begin: datetime.datetime | None = None, last_modified_end: datetime.datetime | None = None, version_id: str | Dict[str, str] | None = None, chunked: Literal[True], use_threads: bool | int = True, ray_args: RayReadParquetSettings | None = None, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → Iterator[pd.DataFrame]

awswrangler.s3.read_parquet(path: str | List[str], *, path_root: str | None = None, dataset: bool = False,
    path_suffix: str | List[str] | None = None, path_ignore_suffix: str | List[str] | None = None, ignore_empty: bool = True, partition_filter: Callable[[Dict[str, str]], bool] | None = None, columns: List[str] | None = None, validate_schema: bool = False, coerce_int96_timestamp_unit: str | None = None, last_modified_begin: datetime.datetime | None = None, last_modified_end: datetime.datetime | None = None, version_id: str | Dict[str, str] | None = None, chunked: bool, use_threads: bool | int = True, ray_args: RayReadParquetSettings | None = None, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → pd.DataFrame | Iterator[pd.DataFrame]

awswrangler.s3.read_parquet(path: str | List[str], *, path_root: str | None = None, dataset: bool = False,
    path_suffix: str | List[str] | None = None, path_ignore_suffix: str | List[str] | None = None, ignore_empty: bool = True, partition_filter: Callable[[Dict[str, str]], bool] | None = None, columns: List[str] | None = None, validate_schema: bool = False, coerce_int96_timestamp_unit: str | None = None, last_modified_begin: datetime.datetime | None = None, last_modified_end: datetime.datetime | None = None, version_id: str | Dict[str, str] | None = None, chunked: int, use_threads: bool | int = True, ray_args: RayReadParquetSettings | None = None, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → Iterator[pd.DataFrame]
```

Read Parquet file(s) from an S3 prefix or list of S3 objects paths.

The concept of *dataset* enables more complex features like partitioning and catalog integration (AWS Glue Catalog).

This function accepts Unix shell-style wildcards in the path argument. \* (matches everything), ? (matches any single character), [seq] (matches any character in seq), [!seq] (matches any character not in seq). If you want to use a path which includes Unix shell-style wildcard characters (\*, ?, /), you can use *glob.escape(path)* before passing the argument to this function.

---

**Note:** Batching (*chunked* argument) (Memory Friendly):

Used to return an Iterable of DataFrames instead of a regular DataFrame.

Two batching strategies are available:

- If **chunked=True**, depending on the size of the data, one or more data frames are returned per file in the path/dataset. Unlike **chunked=INTEGER**, rows from different files are not mixed in the resulting data frames.

- If **chunked=INTEGER**, awswrangler iterates on the data by number of rows equal to the received INTEGER.

P.S. *chunked=True* is faster and uses less memory while *chunked=INTEGER* is more precise in the number of rows.

---

**Note:** If *use\_threads=True*, the number of threads is obtained from `os.cpu_count()`.

---

**Note:** Filtering by *last\_modified begin* and *last\_modified end* is applied after listing all S3 files

---

**Note:** Following arguments are not supported in distributed mode with engine *EngineEnum.RAY*:

- `boto3_session`
  - `version_id`
  - `s3_additional_kwargs`
- 

## Parameters

- **path** (`Union[str, List[str]]`) – S3 prefix (accepts Unix shell-style wildcards) (e.g. `s3://bucket/prefix`) or list of S3 objects paths (e.g. `[s3://bucket/key0, s3://bucket/key1]`).
- **path\_root** (`str, optional`) – Root path of the dataset. If `dataset=True`, it is used as a starting point to load partition columns.
- **dataset** (`bool, default False`) – If *True*, read a parquet dataset instead of individual file(s), loading all related partitions as columns.
- **path\_suffix** (`Union[str, List[str], None]`) – Suffix or List of suffixes to be read (e.g. `[“.gz.parquet”, “.snappy.parquet”]`). If `None`, reads all files. (default)
- **path\_ignore\_suffix** (`Union[str, List[str], None]`) – Suffix or List of suffixes to be ignored.(e.g. `[“.csv”, “_SUCCESS”]`). If `None`, reads all files. (default)
- **ignore\_empty** (`bool, default True`) – Ignore files with 0 bytes.
- **partition\_filter** (`Callable[[Dict[str, str]], bool], optional`) – Callback Function filters to apply on PARTITION columns (PUSH-DOWN filter). This function must receive a single argument (`Dict[str, str]`) where keys are partitions names and values are partitions values. Partitions values must be strings and the function must return a bool, `True` to read the partition or `False` to ignore it. Ignored if `dataset=False`. E.g `lambda x: True if x["year"] == "2020" and x["month"] == "1" else False` <https://aws-data-wrangler.readthedocs.io/en/3.0.0/tutorials/023%20-%20Flexible%20Partitions%20Filter.html>
- **columns** (`List[str], optional`) – List of columns to read from the file(s).
- **validate\_schema** (`bool, default False`) – Check that the schema is consistent across individual files.
- **coerce\_int96\_timestamp\_unit** (`str, optional`) – Cast timestamps that are stored in INT96 format to a particular resolution (e.g. “ms”). Setting to `None` is equivalent to “ns” and therefore INT96 timestamps are inferred as in nanoseconds.

- **last\_modified\_begin**(*datetime, optional*) – Filter S3 objects by Last modified date. Filter is only applied after listing all objects.
- **last\_modified\_end**(*datetime, optional*) – Filter S3 objects by Last modified date. Filter is only applied after listing all objects.
- **version\_id**(*Optional[Union[str, Dict[str, str]]]*) – Version id of the object or mapping of object path to version id. (e.g. {‘s3://bucket/key0’: ‘121212’, ‘s3://bucket/key1’: ‘343434’})
- **chunked**(*Union[int, bool]*) – If passed, the data is split into an iterable of DataFrames (Memory friendly). If *True* an iterable of DataFrames is returned without guarantee of chunk-size. If an *INTEGER* is passed, an iterable of DataFrames is returned with maximum rows equal to the received INTEGER.
- **use\_threads**(*Union[bool, int], default True*) – True to enable concurrent requests, False to disable multiple threads. If enabled, `os.cpu_count()` is used as the max number of threads. If integer is provided, specified number is used.
- **ray\_args**(*RayReadParquetSettings, optional*) – Parameters of the Ray Modin settings. Only used when distributed computing is used with Ray and Modin installed.
- **boto3\_session**(*boto3.Session(), optional*) – Boto3 Session. The default boto3 session is used if None is received.
- **s3\_additional\_kwargs**(*Optional[Dict[str, Any]]*) – Forward to S3 botocore requests.
- **pyarrow\_additional\_kwargs**(*Dict[str, Any], optional*) – Forwarded to `to_pandas` method converting from PyArrow tables to Pandas DataFrame. Valid values include “split\_blocks”, “self\_destruct”, “ignore\_metadata”. e.g. `pyarrow_additional_kwargs={‘split_blocks’: True}`.

#### Returns

Pandas DataFrame or a Generator in case of *chunked=True*.

#### Return type

`Union[pandas.DataFrame, Generator[pandas.DataFrame, None, None]]`

## Examples

Reading all Parquet files under a prefix

```
>>> import awswrangler as wr
>>> df = wr.s3.read_parquet(path='s3://bucket/prefix/')
```

Reading all Parquet files from a list

```
>>> import awswrangler as wr
>>> df = wr.s3.read_parquet(path=['s3://bucket/filename0.parquet', 's3://bucket/
    ↴filename1.parquet'])
```

Reading in chunks (Chunk by file)

```
>>> import awswrangler as wr
>>> dfs = wr.s3.read_parquet(path=['s3://bucket/filename0.parquet', 's3://bucket/
    ↴filename1.parquet'], chunked=True)
```

(continues on next page)

(continued from previous page)

```
>>> for df in dfs:
>>>     print(df) # Smaller Pandas DataFrame
```

Reading in chunks (Chunk by 1MM rows)

```
>>> import awswrangler as wr
>>> dfs = wr.s3.read_parquet(
...     path=['s3://bucket/filename0.parquet', 's3://bucket/filename1.parquet'],
...     chunked=1_000_000
... )
>>> for df in dfs:
>>>     print(df) # 1MM Pandas DataFrame
```

Reading Parquet Dataset with PUSH-DOWN filter over partitions

```
>>> import awswrangler as wr
>>> my_filter = lambda x: True if x["city"].startswith("new") else False
>>> df = wr.s3.read_parquet(path, dataset=True, partition_filter=my_filter)
```

## awswrangler.s3.read\_parquet\_metadata

`awswrangler.s3.read_parquet_metadata(path: str | List[str], dataset: bool = False, version_id: str | Dict[str, str] | None = None, path_suffix: str | None = None, path_ignore_suffix: str | None = None, ignore_empty: bool = True, ignore_null: bool = False, dtype: Dict[str, str] | None = None, sampling: float = 1.0, coerce_int96_timestamp_unit: str | None = None, use_threads: bool | int = True, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None) → Tuple[Dict[str, str], Dict[str, str] | None]`

Read Apache Parquet file(s) metadata from an S3 prefix or list of S3 objects paths.

The concept of *dataset* enables more complex features like partitioning and catalog integration (AWS Glue Catalog).

This function accepts Unix shell-style wildcards in the path argument. \* (matches everything), ? (matches any single character), [seq] (matches any character in seq), [!seq] (matches any character not in seq). If you want to use a path which includes Unix shell-style wildcard characters (\*, ?, /), you can use `glob.escape(path)` before passing the argument to this function.

---

**Note:** If `use_threads=True`, the number of threads is obtained from `os.cpu_count()`.

---



---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
- 

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

---

Check out the [Global Configurations Tutorial](#) for details.

## Parameters

- **path** (*Union[str, List[str]]*) – S3 prefix (accepts Unix shell-style wildcards) (e.g. s3://bucket/prefix) or list of S3 objects paths (e.g. [s3://bucket/key0, s3://bucket/key1]).
- **dataset** (*bool, default False*) – If *True*, read a parquet dataset instead of individual file(s), loading all related partitions as columns.
- **version\_id** (*Union[str, Dict[str, str]], optional*) – Version id of the object or mapping of object path to version id. (e.g. {‘s3://bucket/key0’: ‘121212’, ‘s3://bucket/key1’: ‘343434’})
- **path\_suffix** (*Union[str, List[str], None]*) – Suffix or List of suffixes to be read (e.g. [“.gz.parquet”, “.snappy.parquet”]). If *None*, reads all files. (default)
- **path\_ignore\_suffix** (*Union[str, List[str], None]*) – Suffix or List of suffixes to be ignored.(e.g. [“.csv”, “\_SUCCESS”]). If *None*, reads all files. (default)
- **ignore\_empty** (*bool, default True*) – Ignore files with 0 bytes.
- **ignore\_null** (*bool, default False*) – Ignore columns with null type.
- **dtype** (*Dict[str, str], optional*) – Dictionary of columns names and Athena/Glue types to cast. Use when you have columns with undetermined data types as partitions columns. (e.g. {‘col name’: ‘bigint’, ‘col2 name’: ‘int’})
- **sampling** (*float*) – Ratio of files metadata to inspect. Must be  $0.0 < sampling \leq 1.0$ . The higher, the more accurate. The lower, the faster.
- **use\_threads** (*bool, int*) – True to enable concurrent requests, False to disable multiple threads. If enabled os.cpu\_count() will be used as the max number of threads. If integer is provided, specified number is used.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive *None*.
- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forward to S3 botocore requests.

## Returns

columns\_types: Dictionary with keys as column names and values as data types (e.g. {‘col0’: ‘bigint’, ‘col1’: ‘double’}). / partitions\_types: Dictionary with keys as partition names and values as data types (e.g. {‘col2’: ‘date’}).

## Return type

`Tuple[Dict[str, str], Optional[Dict[str, str]]]`

## Examples

Reading all Parquet files (with partitions) metadata under a prefix

```
>>> import awswrangler as wr
>>> columns_types, partitions_types = wr.s3.read_parquet_metadata(path='s3://bucket/
->prefix/', dataset=True)
```

Reading all Parquet files metadata from a list

```
>>> import awswrangler as wr
>>> columns_types, partitions_types = wr.s3.read_parquet_metadata(path=[
...     's3://bucket/filename0.parquet',
```

(continues on next page)

(continued from previous page)

```

...     's3://bucket/filename1.parquet'
... ])

```

**awswrangler.s3.read\_parquet\_table**

```

awswrangler.s3.read_parquet_table(table: str, database: str, *, filename_suffix: str | List[str] | None = None,
    filename_ignore_suffix: str | List[str] | None = None, catalog_id: str | None = None, partition_filter: Callable[[Dict[str, str]], bool] | None = None, columns: List[str] | None = None, validate_schema: bool = True, coerce_int96_timestamp_unit: str | None = None, chunked: Literal[False] = False, use_threads: bool | int = True, ray_args: RayReadParquetSettings | None = None, boto3_session: boto3.Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → DataFrame

awswrangler.s3.read_parquet_table(table: str, database: str, *, filename_suffix: str | List[str] | None = None,
    filename_ignore_suffix: str | List[str] | None = None, catalog_id: str | None = None, partition_filter: Callable[[Dict[str, str]], bool] | None = None, columns: List[str] | None = None, validate_schema: bool = True, coerce_int96_timestamp_unit: str | None = None, chunked: Literal[True], use_threads: bool | int = True, ray_args: RayReadParquetSettings | None = None, boto3_session: boto3.Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → Iterator[pd.DataFrame]

awswrangler.s3.read_parquet_table(table: str, database: str, *, filename_suffix: str | List[str] | None = None,
    filename_ignore_suffix: str | List[str] | None = None, catalog_id: str | None = None, partition_filter: Callable[[Dict[str, str]], bool] | None = None, columns: List[str] | None = None, validate_schema: bool = True, coerce_int96_timestamp_unit: str | None = None, chunked: bool, use_threads: bool | int = True, ray_args: RayReadParquetSettings | None = None, boto3_session: boto3.Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → pd.DataFrame | Iterator[pd.DataFrame]

awswrangler.s3.read_parquet_table(table: str, database: str, *, filename_suffix: str | List[str] | None = None,
    filename_ignore_suffix: str | List[str] | None = None, catalog_id: str | None = None, partition_filter: Callable[[Dict[str, str]], bool] | None = None, columns: List[str] | None = None, validate_schema: bool = True, coerce_int96_timestamp_unit: str | None = None, chunked: int, use_threads: bool | int = True, ray_args: RayReadParquetSettings | None = None, boto3_session: boto3.Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → Iterator[pd.DataFrame]

```

Read Apache Parquet table registered in the AWS Glue Catalog.

---

**Note:** Batching (*chunked* argument) (Memory Friendly):

Used to return an Iterable of DataFrames instead of a regular DataFrame.

Two batching strategies are available:

- If **chunked=True**, depending on the size of the data, one or more data frames are returned per file in the path/dataset. Unlike **chunked=INTEGER**, rows from different files will not be mixed in the resulting data frames.
- If **chunked=INTEGER**, awswrangler will iterate on the data by number of rows equal the received INTEGER.

P.S. *chunked=True* is faster and uses less memory while *chunked=INTEGER* is more precise in the number of rows.

---

---

**Note:** If *use\_threads=True*, the number of threads is obtained from `os.cpu_count()`.

---

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
  - `s3_additional_kwargs`
- 

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

## Parameters

- **table (str)** – AWS Glue Catalog table name.
- **database (str)** – AWS Glue Catalog database name.
- **filename\_suffix (Union[str, List[str], None])** – Suffix or List of suffixes to be read (e.g. [“.gz.parquet”, “.snappy.parquet”]). If None, read all files. (default)
- **filename\_ignore\_suffix (Union[str, List[str], None])** – Suffix or List of suffixes for S3 keys to be ignored.(e.g. [“.csv”, “\_SUCCESS”]). If None, read all files. (default)
- **catalog\_id (str, optional)** – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **partition\_filter (Optional[Callable[[Dict[str, str]], bool]])** – Callback Function filters to apply on PARTITION columns (PUSH-DOWN filter). This function must receive a single argument (Dict[str, str]) where keys are partitions names and values are partitions values. Partitions values must be strings and the function must return a bool, True to read the partition or False to ignore it. Ignored if `dataset=False`. E.g `lambda x: True if x["year"] == "2020" and x["month"] == "1" else False` <https://aws-sdk-pandas.readthedocs.io/en/3.0.0/tutorials/023%20-%20Flexible%20Partitions%20Filter.html>
- **columns (List[str], optional)** – List of columns to read from the file(s).

- **validate\_schema** (*bool, default False*) – Check that the schema is consistent across individual files.
- **coerce\_int96\_timestamp\_unit** (*str, optional*) – Cast timestamps that are stored in INT96 format to a particular resolution (e.g. “ms”). Setting to None is equivalent to “ns” and therefore INT96 timestamps are inferred as in nanoseconds.
- **chunked** (*Union[int, bool]*) – If passed, the data is split into an iterable of DataFrames (Memory friendly). If *True* an iterable of DataFrames is returned without guarantee of chunk-size. If an *INTEGER* is passed, an iterable of DataFrames is returned with maximum rows equal to the received INTEGER.
- **use\_threads** (*Union[bool, int], default True*) – True to enable concurrent requests, False to disable multiple threads. If enabled, `os.cpu_count()` is used as the max number of threads. If integer is provided, specified number is used.
- **ray\_args** (*RayReadParquetSettings, optional*) – Parameters of the Ray Modin settings. Only used when distributed computing is used with Ray and Modin installed.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session is used if None is received.
- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forward to S3 botocore requests.
- **pyarrow\_additional\_kwargs** (*Dict[str, Any], optional*) – Forwarded to `to_pandas` method converting from PyArrow tables to Pandas DataFrame. Valid values include “split\_blocks”, “self\_destruct”, “ignore\_metadata”. e.g. `pyarrow_additional_kwargs={‘split_blocks’: True}`.

#### Returns

Pandas DataFrame or a Generator in case of `chunked=True`.

#### Return type

`Union[pandas.DataFrame, Generator[pandas.DataFrame, None, None]]`

## Examples

Reading Parquet Table

```
>>> import awswrangler as wr
>>> df = wr.s3.read_parquet_table(database='...', table='...')
```

Reading Parquet Table in chunks (Chunk by file)

```
>>> import awswrangler as wr
>>> dfs = wr.s3.read_parquet_table(database='...', table='...', chunked=True)
>>> for df in dfs:
>>>     print(df) # Smaller Pandas DataFrame
```

Reading Parquet Dataset with PUSH-DOWN filter over partitions

```
>>> import awswrangler as wr
>>> my_filter = lambda x: True if x["city"].startswith("new") else False
>>> df = wr.s3.read_parquet_table(path, dataset=True, partition_filter=my_filter)
```

## awswrangler.s3.select\_query

```
awswrangler.s3.select_query(sql: str, path: str | List[str], input_serialization: str,
                             input_serialization_params: Dict[str, bool | str], compression: str | None =
                             None, scan_range_chunk_size: int | None = None, path_suffix: str | List[str] |
                             None = None, path_ignore_suffix: str | List[str] | None = None, ignore_empty:
                             bool = True, use_threads: bool | int = True, last_modified_begin: datetime |
                             None = None, last_modified_end: datetime | None = None, boto3_session:
                             Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None,
                             pyarrow_additional_kwargs: Dict[str, Any] | None = None) → DataFrame
```

Filter contents of Amazon S3 objects based on SQL statement.

Note: Scan ranges are only supported for uncompressed CSV/JSON, CSV (without quoted delimiters) and JSON objects (in LINES mode only). It means scanning cannot be split across threads if the aforementioned conditions are not met, leading to lower performance.

---

**Note:** Following arguments are not supported in distributed mode with engine *EngineEnum.RAY*:

- `boto3_session`
- 

### Parameters

- **sql (str)** – SQL statement used to query the object.
- **path (Union[str, List[str]])** – S3 prefix (accepts Unix shell-style wildcards) (e.g. `s3://bucket/prefix`) or list of S3 objects paths (e.g. `[s3://bucket/key0, s3://bucket/key1]`).
- **input\_serialization (str,)** – Format of the S3 object queried. Valid values: “CSV”, “JSON”, or “Parquet”. Case sensitive.
- **input\_serialization\_params (Dict[str, Union[bool, str]])** – Dictionary describing the serialization of the S3 object.
- **compression (str, optional)** – Compression type of the S3 object. Valid values: `None`, “gzip”, or “bzip2”. gzip and bzip2 are only valid for CSV and JSON objects.
- **scan\_range\_chunk\_size (int, optional)** – Chunk size used to split the S3 object into scan ranges. 1,048,576 by default.
- **path\_suffix (Union[str, List[str], None])** – Suffix or List of suffixes to be read (e.g. `[“.csv”]`). If `None`, read all files. (default)
- **path\_ignore\_suffix (Union[str, List[str], None])** – Suffix or List of suffixes for S3 keys to be ignored. (e.g. `[“_SUCCESS”]`). If `None`, read all files. (default)
- **ignore\_empty (bool, default True)** – Ignore files with 0 bytes.
- **use\_threads (Union[bool, int])** – `True` (default) to enable concurrent requests, `False` to disable multiple threads. If enabled `os.cpu_count()` is used as the max number of threads. If integer is provided, specified number is used.
- **last\_modified\_begin (datetime, optional)** – Filter S3 objects by Last modified date. Filter is only applied after listing all objects.
- **last\_modified\_end (datetime, optional)** – Filter S3 objects by Last modified date. Filter is only applied after listing all objects.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session is used if none is provided.

- **s3\_additional\_kwargs** (*Dict[str, Any]*, *optional*) – Forwarded to botocore requests. Valid values: “SSECustomerAlgorithm”, “SSECustomerKey”, “ExpectedBucketOwner”. e.g. `s3_additional_kwargs={‘SSECustomerAlgorithm’: ‘md5’}`.
- **pyarrow\_additional\_kwargs** (*Dict[str, Any]*, *optional*) – Forwarded to `to_pandas` method converting from PyArrow tables to Pandas DataFrame. Valid values include “split\_blocks”, “self\_destruct”, “ignore\_metadata”. e.g. `pyarrow_additional_kwargs={‘split_blocks’: True}`.

**Returns**

Pandas DataFrame with results from query.

**Return type**

`pandas.DataFrame`

**Examples**

Reading a gzip compressed JSON document

```
>>> import awswrangler as wr
>>> df = wr.s3.select_query(
...     sql='SELECT * FROM s3object[*][*]',
...     path='s3://bucket/key.json.gzip',
...     input_serialization='JSON',
...     input_serialization_params={
...         'Type': 'Document',
...     },
...     compression="gzip",
... )
```

Reading multiple CSV objects from a prefix

```
>>> import awswrangler as wr
>>> df = wr.s3.select_query(
...     sql='SELECT * FROM s3object',
...     path='s3://bucket/prefix/',
...     input_serialization='CSV',
...     input_serialization_params={
...         'FileHeaderInfo': 'Use',
...         'RecordDelimiter': '\r\n'
...     },
... )
```

Reading a single column from Parquet object with pushdown filter

```
>>> import awswrangler as wr
>>> df = wr.s3.select_query(
...     sql='SELECT s.\\"id\\" FROM s3object s where s.\\"id\\" = 1.0',
...     path='s3://bucket/key.snappy.parquet',
...     input_serialization='Parquet',
... )
```

## awswrangler.s3.size\_objects

```
awswrangler.s3.size_objects(path: str | List[str], version_id: str | Dict[str, str] | None = None, use_threads: bool | int = True, s3_additional_kwargs: Dict[str, Any] | None = None, boto3_session: Session | None = None) → Dict[str, int | None]
```

Get the size (ContentLength) in bytes of Amazon S3 objects from a received S3 prefix or list of S3 objects paths.

This function accepts Unix shell-style wildcards in the path argument. \* (matches everything), ? (matches any single character), [seq] (matches any character in seq), [!seq] (matches any character not in seq). If you want to use a path which includes Unix shell-style wildcard characters (\*, ?, /), you can use `glob.escape(path)` before passing the path to this function.

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
  - `s3_additional_kwargs`
- 

### Parameters

- **path** (`Union[str, List[str]]`) – S3 prefix (accepts Unix shell-style wildcards) (e.g. `s3://bucket/prefix`) or list of S3 objects paths (e.g. `[s3://bucket/key0, s3://bucket/key1]`).
- **version\_id** (`Optional[Union[str, Dict[str, str]]]`) – Version id of the object or mapping of object path to version id. (e.g. `{'s3://bucket/key0': '121212', 's3://bucket/key1': '343434'}`)
- **use\_threads** (`bool, int`) – True to enable concurrent requests, False to disable multiple threads. If enabled `os.cpu_count()` will be used as the max number of threads. If integer is provided, specified number is used.
- **s3\_additional\_kwargs** (`Optional[Dict[str, Any]]`) – Forwarded to botocore requests. e.g. `s3_additional_kwargs={'RequestPayer': 'requester'}`
- **boto3\_session** (`boto3.Session()`, `optional`) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

### Returns

Dictionary where the key is the object path and the value is the object size.

### Return type

`Dict[str, Optional[int]]`

## Examples

```
>>> import awswrangler as wr
>>> sizes0 = wr.s3.size_objects(['s3://bucket/key0', 's3://bucket/key1']) # Get
   ↵the sizes of both objects
>>> sizes1 = wr.s3.size_objects('s3://bucket/prefix') # Get the sizes of all
   ↵objects under the received prefix
```

### `awswrangler.s3.store_parquet_metadata`

`awswrangler.s3.store_parquet_metadata`(*path*: str, *database*: str, *table*: str, *catalog\_id*: str | None = None, *path\_suffix*: str | None = None, *path\_ignore\_suffix*: str | None = None, *ignore\_empty*: bool = True, *dtype*: Dict[str, str] | None = None, *sampling*: float = 1.0, *dataset*: bool = False, *use\_threads*: bool | int = True, *description*: str | None = None, *parameters*: Dict[str, str] | None = None, *columns\_comments*: Dict[str, str] | None = None, *compression*: str | None = None, *mode*: Literal['append', 'overwrite'] = 'overwrite', *catalog\_versioning*: bool = False, *regular\_partitions*: bool = True, *athena\_partition\_projection\_settings*: AthenaPartitionProjectionSettings | None = None, *s3\_additional\_kwargs*: Dict[str, Any] | None = None, *boto3\_session*: Session | None = None) → Tuple[Dict[str, str], Dict[str, str] | None, Dict[str, List[str]] | None]

Infer and store parquet metadata on AWS Glue Catalog.

Infer Apache Parquet file(s) metadata from a received S3 prefix And then stores it on AWS Glue Catalog including all inferred partitions (No need for ‘MSCK REPAIR TABLE’)

The concept of Dataset goes beyond the simple idea of files and enables more complex features like partitioning and catalog integration (AWS Glue Catalog).

This function accepts Unix shell-style wildcards in the path argument. \* (matches everything), ? (matches any single character), [seq] (matches any character in seq), [!seq] (matches any character not in seq). If you want to use a path which includes Unix shell-style wildcard characters (\*, ?, /), you can use `glob.escape(path)` before passing the path to this function.

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
- 

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

## Parameters

- **path** (*str*) – S3 prefix (accepts Unix shell-style wildcards) (e.g. s3://bucket/prefix).
- **table** (*str*) – Glue/Athena catalog: Table name.
- **database** (*str*) – AWS Glue Catalog database name.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **path\_suffix** (*Union[str, List[str], None]*) – Suffix or List of suffixes for filtering S3 keys.
- **path\_ignore\_suffix** (*Union[str, List[str], None]*) – Suffix or List of suffixes for S3 keys to be ignored.
- **ignore\_empty** (*bool*) – Ignore files with 0 bytes.
- **dtype** (*Dict[str, str], optional*) – Dictionary of columns names and Athena/Glue types to be casted. Useful when you have columns with undetermined data types as partitions columns. (e.g. {‘col name’: ‘bigint’, ‘col2 name’: ‘int’})
- **sampling** (*float*) – Random sample ratio of files that will have the metadata inspected. Must be  $0.0 < sampling \leq 1.0$ . The higher, the more accurate. The lower, the faster.
- **dataset** (*bool*) – If True read a parquet dataset instead of simple file(s) loading all the related partitions as columns.
- **use\_threads** (*bool, int*) – True to enable concurrent requests, False to disable multiple threads. If enabled os.cpu\_count() will be used as the max number of threads. If integer is provided, specified number is used.
- **description** (*str, optional*) – Glue/Athena catalog: Table description
- **parameters** (*Dict[str, str], optional*) – Glue/Athena catalog: Key/value pairs to tag the table.
- **columns\_comments** (*Dict[str, str], optional*) – Glue/Athena catalog: Columns names and the related comments (e.g. {‘col0’: ‘Column 0.’, ‘col1’: ‘Column 1.’, ‘col2’: ‘Partition.’}).
- **compression** (*str, optional*) – Compression style (None, snappy, gzip, etc).
- **mode** (*str*) – ‘overwrite’ to recreate any possible existing table or ‘append’ to keep any possible existing table.
- **catalog\_versioning** (*bool*) – If True and *mode=“overwrite”*, creates an archived version of the table catalog before updating it.
- **regular\_partitions** (*bool*) – Create regular partitions (Non projected partitions) on Glue Catalog. Disable when you will work only with Partition Projection. Keep enabled even when working with projections is useful to keep Redshift Spectrum working with the regular partitions.
- **athena\_partition\_projection\_settings** (*AthenaPartitionProjectionSettings, optional*) – Parameters of the Athena Partition Projection (<https://docs.aws.amazon.com/athena/latest/ug/partition-projection.html>). *AthenaPartitionProjectionSettings* is a *TypedDict*, meaning the passed parameter can be instantiated either as an instance of *AthenaPartitionProjectionSettings* or as a regular Python dict.

Following projection parameters are supported:

Table 3: Projection Parameters

Name	Type	Description
projec- tion_types	Op- tional[ str]]	Dictionary of partitions names and Athena projections types. Valid types: “enum”, “integer”, “date”, “injected” <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘enum’, ‘col2_name’: ‘integer’})
projec- tion_range	Op- tional[ str]]	Dictionary of partitions names and Athena projections ranges. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘0,10’, ‘col2_name’: ‘-1,8675309’})
projec- tion_value	Op- tional[ str]]	Dictionary of partitions names and Athena projections values. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘A,B,Unknown’, ‘col2_name’: ‘foo,boo,bar’})
projec- tion_inter- vals	Op- tional[ str]]	Dictionary of partitions names and Athena projections intervals. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘1’, ‘col2_name’: ‘5’})
projec- tion_digits	Op- tional[ str]]	Dictionary of partitions names and Athena projections digits. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘1’, ‘col2_name’: ‘2’})
projec- tion_form:	Op- tional[ str]]	Dictionary of partitions names and Athena projections formats. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_date’: ‘yyyy-MM-dd’, ‘col2_timestamp’: ‘yyyy-MM-dd HH:mm:ss’})
projec- tion_stora- ge	Op- tional[ str]]	Value which allows Athena to properly map partition values if the S3 file locations do not follow a typical .../column=value/... pattern. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html</a> (e.g. s3://bucket/table_root/a=\${a}/\${b}/some_static_subdirectory/\${c}/)

- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to botocore requests. e.g. s3\_additional\_kwargs={‘ServerSideEncryption’: ‘aws:kms’, ‘SSEKMSKeyId’: ‘YOUR\_KMS\_KEY\_ARN’}
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

## Returns

The metadata used to create the Glue Table. columns\_types: Dictionary with keys as column names and values as data types (e.g. {‘col0’: ‘bigint’, ‘col1’: ‘double’}). / partitions\_types: Dictionary with keys as partition names and values as data types (e.g. {‘col2’: ‘date’}). / partitions\_values: Dictionary with keys as S3 path locations and values as a list of partitions values as str (e.g. {‘s3://bucket/prefix/y=2020/m=10’: [‘2020’, ‘10’]}).

## Return type

*Tuple[Dict[str, str], Optional[Dict[str, str]], Optional[Dict[str, List[str]]]]*

## Examples

Reading all Parquet files metadata under a prefix

```
>>> import awswrangler as wr
>>> columns_types, partitions_types, partitions_values = wr.s3.store_parquet_
    .metadata(
        ...
        path='s3://bucket/prefix/',
        ...
        database='...',
        ...
        table='...',
        ...
        dataset=True
    )
```

## awswrangler.s3.to\_csv

```
awswrangler.s3.to_csv(df: DataFrame, path: str | None = None, sep: str = ',', index: bool = True, columns:
    List[str] | None = None, use_threads: bool | int = True, boto3_session: Session | None =
    None, s3_additional_kwargs: Dict[str, Any] | None = None, sanitize_columns: bool =
    False, dataset: bool = False, filename_prefix: str | None = None, partition_cols:
    List[str] | None = None, bucketing_info: Tuple[List[str], int] | None = None,
    concurrent_partitioning: bool = False, mode: Literal['append', 'overwrite',
    'overwrite_partitions'] | None = None, catalog_versioning: bool = False,
    schema_evolution: bool = False, dtype: Dict[str, str] | None = None, database: str |
    None = None, table: str | None = None, glue_table_settings: GlueTableSettings | None
    = None, athena_partition_projection_settings: AthenaPartitionProjectionSettings |
    None = None, catalog_id: str | None = None, **pandas_kwargs: Any) →
    _S3WriteDataReturnValue
```

Write CSV file or dataset on Amazon S3.

The concept of Dataset goes beyond the simple idea of ordinary files and enable more complex features like partitioning and catalog integration (Amazon Athena/AWS Glue Catalog).

---

**Note:** If database` and *table* arguments are passed, the table name and all column names will be automatically sanitized using `wr.catalog.sanitize_table_name` and `wr.catalog.sanitize_column_name`. Please, pass `sanitize_columns=True` to enforce this behaviour always.

---

---

**Note:** If *table* and *database* arguments are passed, `pandas_kwargs` will be ignored due restrictive quoting, date\_format, escapechar and encoding required by Athena/Glue Catalog.

---

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
-

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `concurrent_partitioning`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- **`df` (`pandas.DataFrame`)** – Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>
- **`path` (`str, optional`)** – Amazon S3 path (e.g. `s3://bucket/prefix/filename.csv`) (for dataset e.g. `s3://bucket/prefix`). Required if `dataset=False` or when creating a new dataset
- **`sep` (`str`)** – String of length 1. Field delimiter for the output file.
- **`index` (`bool`)** – Write row names (index).
- **`columns` (`Optional[List[str]`])** – Columns to write.
- **`use_threads` (`bool, int`)** – True to enable concurrent requests, False to disable multiple threads. If enabled `os.cpu_count()` will be used as the max number of threads. If integer is provided, specified number is used.
- **`boto3_session` (`boto3.Session()`, `optional`)** – Boto3 Session. The default boto3 Session will be used if `boto3_session` receive None.
- **`s3_additional_kwargs` (`Optional[Dict[str, Any]`])** – Forwarded to botocore requests. e.g. `s3_additional_kwargs={‘ServerSideEncryption’: ‘aws:kms’, ‘SSEKMSKeyId’: ‘YOUR_KMS_KEY_ARN’}`
- **`sanitize_columns` (`bool`)** – True to sanitize columns names or False to keep it as is. True value is forced if `dataset=True`.
- **`dataset` (`bool`)** – If True store as a dataset instead of ordinary file(s) If True, enable all follow arguments: `partition_cols`, `mode`, `database`, `table`, `description`, `parameters`, `columns_comments`, `concurrent_partitioning`, `catalog_versioning`, `projection_params`, `catalog_id`, `schema_evolution`.
- **`filename_prefix` (`str, optional`)** – If `dataset=True`, add a filename prefix to the output files.
- **`partition_cols` (`List[str], optional`)** – List of column names that will be used to create partitions. Only takes effect if `dataset=True`.
- **`bucketing_info` (`Tuple[List[str], int], optional`)** – Tuple consisting of the column names used for bucketing as the first element and the number of buckets as the second element. Only `str, int` and `bool` are supported as column data types for bucketing.
- **`concurrent_partitioning` (`bool`)** – If True will increase the parallelism level during the partitions writing. It will decrease the writing time and increase the memory usage. <https://aws-sdk-pandas.readthedocs.io/en/3.0.0/tutorials/022%20-%20Writing%20Partitions%20Concurrently.html>

- **mode** (*str, optional*) – append (Default), `overwrite`, `overwrite_partitions`. Only takes effect if `dataset=True`. For details check the related tutorial: [https://aws-sdk-pandas.readthedocs.io/en/3.0.0/stubs/awswrangler.s3.to\\_parquet.html#awswrangler.s3.to\\_parquet](https://aws-sdk-pandas.readthedocs.io/en/3.0.0/stubs/awswrangler.s3.to_parquet.html#awswrangler.s3.to_parquet)
- **catalog\_versioning** (*bool*) – If True and `mode="overwrite"`, creates an archived version of the table catalog before updating it.
- **schema\_evolution** (*bool*) – If True allows schema evolution (new or missing columns), otherwise a exception will be raised. (Only considered if `dataset=True` and mode in (“append”, “`overwrite_partitions`”)). False by default. Related tutorial: <https://aws-sdk-pandas.readthedocs.io/en/3.0.0/tutorials/014%20-%20Schema%20Evolution.html>
- **database** (*str, optional*) – Glue/Athena catalog: Database name.
- **table** (*str, optional*) – Glue/Athena catalog: Table name.
- **glue\_table\_settings** (*dict (`GlueTableSettings`), optional*) – Settings for writing to the Glue table.
- **dtype** (*Dict[str, str], optional*) – Dictionary of columns names and Athena/Glue types to be casted. Useful when you have columns with undetermined or mixed data types. (e.g. {‘col name’: ‘bigint’, ‘col2 name’: ‘int’})
- **athena\_partition\_projection\_settings** (*AthenaPartitionProjectionSettings, optional*) – Parameters of the Athena Partition Projection (<https://docs.aws.amazon.com/athena/latest/ug/partition-projection.html>). `AthenaPartitionProjectionSettings` is a *TypedDict*, meaning the passed parameter can be instantiated either as an instance of `AthenaPartitionProjectionSettings` or as a regular Python dict.

Following projection parameters are supported:

Table 4: Projection Parameters

Name	Type	Description
projec- tion_types	Op- tional[ str]]	Dictionary of partitions names and Athena projections types. Valid types: “enum”, “integer”, “date”, “injected” <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘enum’, ‘col2_name’: ‘integer’})
projec- tion_range	Op- tional[ str]]	Dictionary of partitions names and Athena projections ranges. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘0,10’, ‘col2_name’: ‘-1,8675309’})
projec- tion_value	Op- tional[ str]]	Dictionary of partitions names and Athena projections values. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘A,B,Unknown’, ‘col2_name’: ‘foo,boo,bar’})
projec- tion_inter- vals	Op- tional[ str]]	Dictionary of partitions names and Athena projections intervals. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘1’, ‘col2_name’: ‘5’})
projec- tion_digits	Op- tional[ str]]	Dictionary of partitions names and Athena projections digits. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘1’, ‘col2_name’: ‘2’})
projec- tion_form-	Op- tional[ str]]	Dictionary of partitions names and Athena projections formats. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_date’: ‘yyyy-MM-dd’, ‘col2_timestamp’: ‘yyyy-MM-dd HH:mm:ss’})
projec- tion_stora- ge	Op- tional[ str]]	Value which allows Athena to properly map partition values if the S3 file locations do not follow a typical .../column=value/... pattern. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html</a> (e.g. s3://bucket/table_root/a=\${a}/\${b}/some_static_subdirectory/\${c}/)

- **catalog\_id (str, optional)** – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **pandas\_kwargs** – KEYWORD arguments forwarded to pandas.DataFrame.to\_csv(). You can NOT pass *pandas\_kwargs* explicit, just add valid Pandas arguments in the function call and awswrangler will accept it. e.g. wr.s3.to\_csv(df, path, sep=‘|’, na\_rep=‘NULL’, decimal=‘,’) [https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.to\\_csv.html](https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.to_csv.html)

### Returns

Dictionary with: ‘paths’: List of all stored files paths on S3. ‘partitions\_values’: Dictionary of partitions added with keys as S3 path locations and values as a list of partitions values as str.

### Return type

wr.typing.\_S3WriteDataReturnValue

## Examples

Writing single file

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_csv(
...     df=pd.DataFrame({'col': [1, 2, 3]}),
...     path='s3://bucket/prefix/my_file.csv',
... )
{
    'paths': ['s3://bucket/prefix/my_file.csv'],
    'partitions_values': {}
}
```

Writing single file with pandas\_kwargs

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_csv(
...     df=pd.DataFrame({'col': [1, 2, 3]}),
...     path='s3://bucket/prefix/my_file.csv',
...     sep='|',
...     na_rep='NULL',
...     decimal=','
... )
{
    'paths': ['s3://bucket/prefix/my_file.csv'],
    'partitions_values': {}
}
```

Writing single file encrypted with a KMS key

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_csv(
...     df=pd.DataFrame({'col': [1, 2, 3]}),
...     path='s3://bucket/prefix/my_file.csv',
...     s3_additional_kwargs={
...         'ServerSideEncryption': 'aws:kms',
...         'SSEKMSKeyId': 'YOUR_KMS_KEY_ARN'
...     }
... )
{
    'paths': ['s3://bucket/prefix/my_file.csv'],
    'partitions_values': {}
}
```

Writing partitioned dataset

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_csv(
...     df=pd.DataFrame({
```

(continues on next page)

(continued from previous page)

```

...
    'col': [1, 2, 3],
    'col2': ['A', 'A', 'B']
}),
path='s3://bucket/prefix',
dataset=True,
partition_cols=['col2']
)
{
    'paths': ['s3://.../col2=A/x.csv', 's3://.../col2=B/y.csv'],
    'partitions_values': {
        's3://.../col2=A/': ['A'],
        's3://.../col2=B/': ['B']
    }
}
}

```

Writing partitioned dataset with partition projection

```

>>> import awswrangler as wr
>>> import pandas as pd
>>> from datetime import datetime
>>> dt = lambda x: datetime.strptime(x, "%Y-%m-%d").date()
>>> wr.s3.to_csv(
...     df=pd.DataFrame({
...         "id": [1, 2, 3],
...         "value": [1000, 1001, 1002],
...         "category": ['A', 'B', 'C'],
...     }),
...     path='s3://bucket/prefix',
...     dataset=True,
...     partition_cols=['value', 'category'],
...     athena_partition_projection_settings={
...         "projection_types": {
...             "value": "integer",
...             "category": "enum",
...         },
...         "projection_ranges": {
...             "value": "1000,2000",
...             "category": "A,B,C",
...         },
...     },
... ),
... {
...     'paths': [
...         's3://.../value=1000/category=A/x.json', ...
...     ],
...     'partitions_values': {
...         's3://.../value=1000/category=A/': [
...             '1000',
...             'A',
...         ], ...
...     }
... }

```

Writing bucketed dataset

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_csv(
...     df=pd.DataFrame({
...         'col': [1, 2, 3],
...         'col2': ['A', 'A', 'B']
...     }),
...     path='s3://bucket/prefix',
...     dataset=True,
...     bucketing_info([["col2"], 2])
... )
{
    'paths': ['s3://.../x_bucket-00000.csv', 's3://.../col2=B/x_bucket-00001.csv'],
    'partitions_values': {}
}
```

Writing dataset to S3 with metadata on Athena/Glue Catalog.

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_csv(
...     df=pd.DataFrame({
...         'col': [1, 2, 3],
...         'col2': ['A', 'A', 'B']
...     }),
...     path='s3://bucket/prefix',
...     dataset=True,
...     partition_cols=['col2'],
...     database='default', # Athena/Glue database
...     table='my_table' # Athena/Glue table
... )
{
    'paths': ['s3://.../col2=A/x.csv', 's3://.../col2=B/y.csv'],
    'partitions_values': {
        's3://.../col2=A/': ['A'],
        's3://.../col2=B/': ['B']
    }
}
```

Writing dataset to Glue governed table

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_csv(
...     df=pd.DataFrame({
...         'col': [1, 2, 3],
...         'col2': ['A', 'A', 'B'],
...         'col3': [None, None, None]
...     }),
...     dataset=True,
...     mode='append',
...     database='default', # Athena/Glue database
```

(continues on next page)

(continued from previous page)

```

...     table='my_table', # Athena/Glue table
...     glue_table_settings=wr.typing.GlueTableSettings(
...         table_type="GOVERNED",
...         transaction_id="xxx",
...     ),
... )
{
    'paths': ['s3://.../x.csv'],
    'partitions_values': {}
}

```

Writing dataset casting empty column data type

```

>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_csv(
...     df=pd.DataFrame({
...         'col': [1, 2, 3],
...         'col2': ['A', 'A', 'B'],
...         'col3': [None, None, None]
...     }),
...     path='s3://bucket/prefix',
...     dataset=True,
...     database='default', # Athena/Glue database
...     table='my_table' # Athena/Glue table
...     dtype={'col3': 'date'}
... )
{
    'paths': ['s3://.../x.csv'],
    'partitions_values': {}
}

```

## awswrangler.s3.to\_excel

`awswrangler.s3.to_excel(df: DataFrame, path: str, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, use_threads: bool | int = True, **pandas_kwargs: Any) → str`

Write EXCEL file on Amazon S3.

---

**Note:** This function accepts any Pandas's `read_excel()` argument. [https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read\\_excel.html](https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read_excel.html)

---



---

**Note:** Depending on the file extension ('xlsx', 'xls', 'odf'...), an additional library might have to be installed first.

---



---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

## Parameters

- **df** (`pandas.DataFrame`) – Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>
- **path** (`str`) – Amazon S3 path (e.g. `s3://bucket/filename.xlsx`).
- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 Session will be used if boto3\_session receive None.
- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to botocore requests. e.g. `s3_additional_kwargs={‘ServerSideEncryption’: ‘aws:kms’, ‘SSEKMSKeyId’: ‘YOUR_KMS_KEY_ARN’}`
- **use\_threads** (`bool, int`) – True to enable concurrent requests, False to disable multiple threads. If enabled `os.cpu_count()` will be used as the max number of threads. If integer is provided, specified number is used.
- **pandas\_kwargs** – KEYWORD arguments forwarded to `pandas.DataFrame.to_excel()`. You can NOT pass `pandas_kwargs` explicit, just add valid Pandas arguments in the function call and awswrangler will accept it. e.g. `wr.s3.to_excel(df, path, na_rep="\"", index=False)` [https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.to\\_excel.html](https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.to_excel.html)

## Returns

Written S3 path.

## Return type

`str`

## Examples

Writing EXCEL file

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_excel(df, 's3://bucket/filename.xlsx')
```

## awswrangler.s3.to\_json

```
awswrangler.s3.to_json(df: DataFrame, path: str | None = None, index: bool = True, columns: List[str] | None = None, use_threads: bool | int = True, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, sanitize_columns: bool = False, dataset: bool = False, filename_prefix: str | None = None, partition_cols: List[str] | None = None, bucketing_info: Tuple[List[str], int] | None = None, concurrent_partitioning: bool = False, mode: Literal['append', 'overwrite', 'overwrite_partitions'] | None = None, catalog_versioning: bool = False, schema_evolution: bool = True, dtype: Dict[str, str] | None = None, database: str | None = None, table: str | None = None, glue_table_settings: GlueTableSettings | None = None, athena_partition_projection_settings: AthenaPartitionProjectionSettings | None = None, catalog_id: str | None = None, **pandas_kwargs: Any) → _S3WriteDataReturnValue
```

Write JSON file on Amazon S3.

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

---

**Note:** Following arguments are not supported in distributed mode with engine *EngineEnum.RAY*:

- boto3\_session
- 

**Note:** This function has arguments which can be configured globally through *wr.config* or environment variables:

- catalog\_id
- concurrent\_partitioning
- database

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- **df** (*pandas.DataFrame*) – Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>
- **path** (*str*) – Amazon S3 path (e.g. s3://bucket/filename.json).
- **index** (*bool*) – Write row names (index).
- **columns** (*Optional[List[str]]*) – Columns to write.
- **use\_threads** (*bool, int*) – True to enable concurrent requests, False to disable multiple threads. If enabled os.cpu\_count() will be used as the max number of threads. If integer is provided, specified number is used.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 Session will be used if boto3\_session receive None.
- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to botocore requests. e.g. s3\_additional\_kwargs={'ServerSideEncryption': 'aws:kms', 'SSEKMSKeyId': 'YOUR\_KMS\_KEY\_ARN'}
- **sanitize\_columns** (*bool*) – True to sanitize columns names or False to keep it as is. True value is forced if *dataset=True*.
- **dataset** (*bool*) – If True store as a dataset instead of ordinary file(s) If True, enable all follow arguments: partition\_cols, mode, database, table, description, parameters, columns\_comments, concurrent\_partitioning, catalog\_versioning, projection\_params, catalog\_id, schema\_evolution.
- **filename\_prefix** (*str, optional*) – If dataset=True, add a filename prefix to the output files.
- **partition\_cols** (*List[str], optional*) – List of column names that will be used to create partitions. Only takes effect if dataset=True.
- **bucketing\_info** (*Tuple[List[str], int], optional*) – Tuple consisting of the column names used for bucketing as the first element and the number of buckets as the second element. Only *str, int* and *bool* are supported as column data types for bucketing.
- **concurrent\_partitioning** (*bool*) – If True will increase the parallelism level during the partitions writing. It will decrease the writing time and increase the memory usage. <https://aws-sdk-pandas.readthedocs.io/en/3.0.0/tutorials/022%20-%20Writing%20Partitions%20Concurrently.html>

- **mode** (*str, optional*) – append (Default), `overwrite`, `overwrite_partitions`. Only takes effect if `dataset=True`. For details check the related tutorial: [https://aws-sdk-pandas.readthedocs.io/en/3.0.0/stubs/awswrangler.s3.to\\_parquet.html#awswrangler.s3.to\\_parquet](https://aws-sdk-pandas.readthedocs.io/en/3.0.0/stubs/awswrangler.s3.to_parquet.html#awswrangler.s3.to_parquet)
- **catalog\_versioning** (*bool*) – If True and `mode="overwrite"`, creates an archived version of the table catalog before updating it.
- **schema\_evolution** (*bool*) – If True allows schema evolution (new or missing columns), otherwise a exception will be raised. (Only considered if `dataset=True` and mode in (“append”, “`overwrite_partitions`”)) Related tutorial: <https://aws-sdk-pandas.readthedocs.io/en/3.0.0/tutorials/014%20-%20Schema%20Evolution.html>
- **database** (*str, optional*) – Glue/Athena catalog: Database name.
- **table** (*str, optional*) – Glue/Athena catalog: Table name.
- **glue\_table\_settings** (*dict (`GlueTableSettings`), optional*) – Settings for writing to the Glue table.
- **dtype** (*Dict[str, str], optional*) – Dictionary of columns names and Athena/Glue types to be casted. Useful when you have columns with undetermined or mixed data types. (e.g. {‘col name’: ‘bigint’, ‘col2 name’: ‘int’})
- **athena\_partition\_projection\_settings** (*AthenaPartitionProjectionSettings, optional*) – Parameters of the Athena Partition Projection (<https://docs.aws.amazon.com/athena/latest/ug/partition-projection.html>). `AthenaPartitionProjectionSettings` is a *TypedDict*, meaning the passed parameter can be instantiated either as an instance of `AthenaPartitionProjectionSettings` or as a regular Python dict.

Following projection parameters are supported:

Table 5: Projection Parameters

Name	Type	Description
projec- tion_types	Op- tional[ str]]	Dictionary of partitions names and Athena projections types. Valid types: “enum”, “integer”, “date”, “injected” <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘enum’, ‘col2_name’: ‘integer’})
projec- tion_range	Op- tional[ str]]	Dictionary of partitions names and Athena projections ranges. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘0,10’, ‘col2_name’: ‘-1,8675309’})
projec- tion_value	Op- tional[ str]]	Dictionary of partitions names and Athena projections values. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘A,B,Unknown’, ‘col2_name’: ‘foo,boo,bar’})
projec- tion_inter- vals	Op- tional[ str]]	Dictionary of partitions names and Athena projections intervals. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘1’, ‘col2_name’: ‘5’})
projec- tion_digits	Op- tional[ str]]	Dictionary of partitions names and Athena projections digits. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘1’, ‘col2_name’: ‘2’})
projec- tion_form- ats	Op- tional[ str]]	Dictionary of partitions names and Athena projections formats. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_date’: ‘yyyy-MM-dd’, ‘col2_timestamp’: ‘yyyy-MM-dd HH:mm:ss’})
projec- tion_stora- ge	Op- tional[ str]]	Value which allows Athena to properly map partition values if the S3 file locations do not follow a typical .../column=value/... pattern. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html</a> (e.g. s3://bucket/table_root/a=\${a}/\${b}/some_static_subdirectory/\${c}/)

- **catalog\_id (str, optional)** – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **pandas\_kwargs** – KEYWORD arguments forwarded to pandas.DataFrame.to\_json(). You can NOT pass *pandas\_kwargs* explicit, just add valid Pandas arguments in the function call and awswrangler will accept it. e.g. wr.s3.to\_json(df, path, lines=True, date\_format='iso') [https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.to\\_json.html](https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.to_json.html)

### Returns

Dictionary with: ‘paths’: List of all stored files paths on S3. ‘partitions\_values’: Dictionary of partitions added with keys as S3 path locations and values as a list of partitions values as str.

### Return type

wr.typing.\_S3WriteDataReturnValue

## Examples

Writing JSON file

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_json(
...     df=pd.DataFrame({'col': [1, 2, 3]}),
...     path='s3://bucket/filename.json',
... )
```

Writing JSON file using pandas\_kwargs

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_json(
...     df=pd.DataFrame({'col': [1, 2, 3]}),
...     path='s3://bucket/filename.json',
...     lines=True,
...     date_format='iso'
... )
```

Writing CSV file encrypted with a KMS key

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_json(
...     df=pd.DataFrame({'col': [1, 2, 3]}),
...     path='s3://bucket/filename.json',
...     s3_additional_kwargs={
...         'ServerSideEncryption': 'aws:kms',
...         'SSEKMSKeyId': 'YOUR_KMS_KEY_ARN'
...     }
... )
```

Writing partitioned dataset with partition projection

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> from datetime import datetime
>>> dt = lambda x: datetime.strptime(x, "%Y-%m-%d").date()
>>> wr.s3.to_json(
...     df=pd.DataFrame({
...         "id": [1, 2, 3],
...         "value": [1000, 1001, 1002],
...         "category": ['A', 'B', 'C'],
...     }),
...     path='s3://bucket/prefix',
...     dataset=True,
...     partition_cols=['value', 'category'],
...     athena_partition_projection_settings={
...         "projection_types": {
...             "value": "integer",
...             "category": "enum",
...         }
...     }
... )
```

(continues on next page)

(continued from previous page)

```

...,
"projection_ranges": {
...    "value": "1000,2000",
...    "category": "A,B,C",
...},
...),
...
{
  'paths': [
    's3://.../value=1000/category=A/x.json', ...
  ],
  'partitions_values': {
    's3://.../value=1000/category=A/': [
      '1000',
      'A',
    ], ...
  }
}
}

```

### `awswrangler.s3.to_parquet`

`awswrangler.s3.to_parquet(df: DataFrame, path: str | None = None, index: bool = False, compression: str | None = 'snappy', pyarrow_additional_kwargs: Dict[str, Any] | None = None, max_rows_by_file: int | None = None, use_threads: bool | int = True, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None, sanitize_columns: bool = False, dataset: bool = False, filename_prefix: str | None = None, partition_cols: List[str] | None = None, bucketing_info: Tuple[List[str], int] | None = None, concurrent_partitioning: bool = False, mode: Literal['append', 'overwrite', 'overwrite_partitions'] | None = None, catalog_versioning: bool = False, schema_evolution: bool = True, database: str | None = None, table: str | None = None, glue_table_settings: GlueTableSettings | None = None, athena_partition_projection_settings: AthenaPartitionProjectionSettings | None = None, catalog_id: str | None = None) → _S3WriteDataReturnValue`

Write Parquet file or dataset on Amazon S3.

The concept of Dataset goes beyond the simple idea of ordinary files and enable more complex features like partitioning and catalog integration (Amazon Athena/AWS Glue Catalog).

---

**Note:** This operation may mutate the original pandas DataFrame in-place. To avoid this behaviour please pass in a deep copy instead (i.e. `df.copy()`)

---



---

**Note:** If `database` and `table` arguments are passed, the table name and all column names will be automatically sanitized using `wr.catalog.sanitize_table_name` and `wr.catalog.sanitize_column_name`. Please, pass `sanitize_columns=True` to enforce this behaviour always.

---



---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from

os.cpu\_count()).

---

**Note:** Following arguments are not supported in distributed mode with engine *EngineEnum.RAY*:

- boto3\_session
  - s3\_additional\_kwargs
- 

**Note:** This function has arguments which can be configured globally through *wr.config* or environment variables:

- catalog\_id
- concurrent\_partitioning
- database

Check out the [Global Configurations Tutorial](#) for details.

---

## Parameters

- **df** (*pandas.DataFrame*) – Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>
- **path** (*str, optional*) – S3 path (for file e.g. `s3://bucket/prefix/filename.parquet`) (for dataset e.g. `s3://bucket/prefix`). Required if dataset=False or when dataset=True and creating a new dataset
- **index** (*bool*) – True to store the DataFrame index in file, otherwise False to ignore it. Is not supported in conjunction with *max\_rows\_by\_file* when running the library with Ray/Modin.
- **compression** (*str, optional*) – Compression style (None, snappy, gzip, zstd).
- **pyarrow\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Additional parameters forwarded to pyarrow. e.g. `pyarrow_additional_kwargs={‘coerce_timestamps’: ‘ns’, ‘use_DEPRECATED_int96_timestamps’: False, ‘allow_truncated_timestamps’:False}`
- **max\_rows\_by\_file** (*int*) – Max number of rows in each file. Default is None i.e. don’t split the files. (e.g. 33554432, 268435456) Is not supported in conjunction with *index=True* when running the library with Ray/Modin.
- **use\_threads** (*bool, int*) – True to enable concurrent requests, False to disable multiple threads. If enabled `os.cpu_count()` will be used as the max number of threads. If integer is provided, specified number is used.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.
- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to botocore requests. e.g. `s3_additional_kwargs={‘ServerSideEncryption’: ‘aws:kms’, ‘SSEKMSKeyId’: ‘YOUR_KMS_KEY_ARN’}`
- **sanitize\_columns** (*bool*) – True to sanitize columns names (using `wr.catalog.sanitize_table_name` and `wr.catalog.sanitize_column_name`) or False to keep it as is. True value behaviour is enforced if *database* and *table* arguments are passed.
- **dataset** (*bool*) – If True store a parquet dataset instead of a ordinary file(s) If True, enable all follow arguments: *partition\_cols*, *mode*, *database*, *table*, *description*, *parameters*,

columns\_comments, concurrent\_partitioning, catalog\_versioning, projection\_params, catalog\_id, schema\_evolution.

- **filename\_prefix**(*str, optional*) – If dataset=True, add a filename prefix to the output files.
- **partition\_cols**(*List[str], optional*) – List of column names that will be used to create partitions. Only takes effect if dataset=True.
- **bucketing\_info**(*Tuple[List[str], int], optional*) – Tuple consisting of the column names used for bucketing as the first element and the number of buckets as the second element. Only *str, int* and *bool* are supported as column data types for bucketing.
- **concurrent\_partitioning**(*bool*) – If True will increase the parallelism level during the partitions writing. It will decrease the writing time and increase the memory usage. <https://aws-sdk-pandas.readthedocs.io/en/3.0.0/tutorials/022%20-%20Writing%20Partitions%20Concurrently.html>
- **mode**(*str, optional*) – append (Default), **overwrite**, **overwrite\_partitions**. Only takes effect if dataset=True. For details check the related tutorial: <https://aws-sdk-pandas.readthedocs.io/en/3.0.0/tutorials/004%20-%20Parquet%20Datasets.html>
- **catalog\_versioning**(*bool*) – If True and mode="overwrite", creates an archived version of the table catalog before updating it.
- **schema\_evolution**(*bool*) – If True allows schema evolution (new or missing columns), otherwise a exception will be raised. True by default. (Only considered if dataset=True and mode in ("append", "overwrite\_partitions")) Related tutorial: <https://aws-sdk-pandas.readthedocs.io/en/3.0.0/tutorials/014%20-%20Schema%20Evolution.html>
- **database**(*str, optional*) – Glue/Athena catalog: Database name.
- **table**(*str, optional*) – Glue/Athena catalog: Table name.
- **glue\_table\_settings**(*dict (GlueTableSettings), optional*) – Settings for writing to the Glue table.
- **dtype**(*Dict[str, str], optional*) – Dictionary of columns names and Athena/Glue types to be casted. Useful when you have columns with undetermined or mixed data types. (e.g. {'col name': 'bigint', 'col2 name': 'int'})
- **athena\_partition\_projection\_settings**(*AthenaPartitionProjectionSettings, optional*) – Parameters of the Athena Partition Projection (<https://docs.aws.amazon.com/athena/latest/ug/partition-projection.html>). AthenaPartitionProjectionSettings is a *TypedDict*, meaning the passed parameter can be instantiated either as an instance of AthenaPartitionProjectionSettings or as a regular Python dict.

Following projection parameters are supported:

Table 6: Projection Parameters

Name	Type	Description
projec- tion_types	Op- tional[ str]]	Dictionary of partitions names and Athena projections types. Valid types: “enum”, “integer”, “date”, “injected” <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘enum’, ‘col2_name’: ‘integer’})
projec- tion_range	Op- tional[ str]]	Dictionary of partitions names and Athena projections ranges. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘0,10’, ‘col2_name’: ‘-1,8675309’})
projec- tion_value	Op- tional[ str]]	Dictionary of partitions names and Athena projections values. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘A,B,Unknown’, ‘col2_name’: ‘foo,boo,bar’})
projec- tion_inter- vals	Op- tional[ str]]	Dictionary of partitions names and Athena projections intervals. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘1’, ‘col2_name’: ‘5’})
projec- tion_digits	Op- tional[ str]]	Dictionary of partitions names and Athena projections digits. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘1’, ‘col2_name’: ‘2’})
projec- tion_form- ats	Op- tional[ str]]	Dictionary of partitions names and Athena projections formats. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_date’: ‘yyyy-MM-dd’, ‘col2_timestamp’: ‘yyyy-MM-dd HH:mm:ss’})
projec- tion_stora- ge	Op- tional[ str]]	Value which allows Athena to properly map partition values if the S3 file locations do not follow a typical .../column=value/... pattern. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html</a> (e.g. s3://bucket/table_root/a=\${a}/\${b}/some_static_subdirectory/\${c}/)

- **catalog\_id** (*str, optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.

### Returns

Dictionary with: ‘paths’: List of all stored files paths on S3. ‘partitions\_values’: Dictionary of partitions added with keys as S3 path locations and values as a list of partitions values as str.

### Return type

wr.typing.\_S3WriteDataReturnValue

## Examples

Writing single file

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_parquet(
...     df=pd.DataFrame({'col': [1, 2, 3]}),
...     path='s3://bucket/prefix/my_file.parquet',
... )
```

(continues on next page)

(continued from previous page)

```
{
    'paths': ['s3://bucket/prefix/my_file.parquet'],
    'partitions_values': {}
}
```

Writing single file encrypted with a KMS key

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_parquet(
...     df=pd.DataFrame({'col': [1, 2, 3]}),
...     path='s3://bucket/prefix/my_file.parquet',
...     s3_additional_kwargs={
...         'ServerSideEncryption': 'aws:kms',
...         'SSEKMSKeyId': 'YOUR_KMS_KEY_ARN'
...     }
... )
{
    'paths': ['s3://bucket/prefix/my_file.parquet'],
    'partitions_values': {}
}
```

Writing partitioned dataset

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_parquet(
...     df=pd.DataFrame({
...         'col': [1, 2, 3],
...         'col2': ['A', 'A', 'B']
...     }),
...     path='s3://bucket/prefix',
...     dataset=True,
...     partition_cols=['col2']
... )
{
    'paths': ['s3://.../col2=A/x.parquet', 's3://.../col2=B/y.parquet'],
    'partitions_values': {
        's3://.../col2=A/': ['A'],
        's3://.../col2=B/': ['B']
    }
}
```

Writing partitioned dataset with partition projection

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> from datetime import datetime
>>> dt = lambda x: datetime.strptime(x, "%Y-%m-%d").date()
>>> wr.s3.to_parquet(
...     df=pd.DataFrame({
...         "id": [1, 2, 3],
...         "value": [1000, 1001, 1002],
...     })
... )
```

(continues on next page)

(continued from previous page)

```
...     "category": ['A', 'B', 'C'],
... },
... path='s3://bucket/prefix',
... dataset=True,
... partition_cols=['value', 'category'],
... athena_partition_projection_settings={
...     "projection_types": {
...         "value": "integer",
...         "category": "enum",
...     },
...     "projection_ranges": {
...         "value": "1000,2000",
...         "category": "A,B,C",
...     },
... },
... )
{
    'paths': [
        's3://.../value=1000/category=A/x.snappy.parquet', ...
    ],
    'partitions_values': {
        's3://.../value=1000/category=A/': [
            '1000',
            'A',
        ], ...
    }
}
```

Writing bucketed dataset

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_parquet(
...     df=pd.DataFrame({
...         'col': [1, 2, 3],
...         'col2': ['A', 'A', 'B']
...     }),
...     path='s3://bucket/prefix',
...     dataset=True,
...     bucketing_info=[["col2"], 2]
... )
{
    'paths': ['s3://.../x_bucket-00000.csv', 's3://.../col2=B/x_bucket-00001.csv'],
    'partitions_values': {}
}
```

Writing dataset to S3 with metadata on Athena/Glue Catalog.

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_parquet(
...     df=pd.DataFrame({
```

(continues on next page)

(continued from previous page)

```

...
    'col': [1, 2, 3],
    'col2': ['A', 'A', 'B']
}),
path='s3://bucket/prefix',
dataset=True,
partition_cols=['col2'],
database='default', # Athena/Glue database
table='my_table' # Athena/Glue table
)
{
    'paths': ['s3://.../col2=A/x.parquet', 's3://.../col2=B/y.parquet'],
    'partitions_values': {
        's3://.../col2=A/': ['A'],
        's3://.../col2=B/': ['B']
    }
}

```

Writing dataset to Glue governed table

```

>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_parquet(
...     df=pd.DataFrame({
...         'col': [1, 2, 3],
...         'col2': ['A', 'A', 'B'],
...         'col3': [None, None, None]
...     }),
...     dataset=True,
...     mode='append',
...     database='default', # Athena/Glue database
...     table='my_table', # Athena/Glue table
...     glue_table_settings=wr.typing.GlueTableSettings(
...         table_type="GOVERNED",
...         transaction_id="xxx",
...     ),
... )
{
    'paths': ['s3://.../x.parquet'],
    'partitions_values': {}
}

```

Writing dataset casting empty column data type

```

>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.s3.to_parquet(
...     df=pd.DataFrame({
...         'col': [1, 2, 3],
...         'col2': ['A', 'A', 'B'],
...         'col3': [None, None, None]
...     }),
...     path='s3://bucket/prefix',
...

```

(continues on next page)

(continued from previous page)

```
...     dataset=True,
...     database='default', # Athena/Glue database
...     table='my_table' # Athena/Glue table
...     dtype={'col3': 'date'}
...
{
    'paths': ['s3://.../x.parquet'],
    'partitions_values': {}
}
```

## awswrangler.s3.upload

`awswrangler.s3.upload(local_file: str | Any, path: str, use_threads: bool | int = True, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, Any] | None = None) → None`

Upload file from a local file to received S3 path.

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

### Parameters

- **local\_file** (`Union[str, Any]`) – A file-like object in binary mode or a path to local file (e.g. `./local/path/to/key0`).
- **path** (`str`) – S3 path (e.g. `s3://bucket/key0`).
- **use\_threads** (`bool, int`) – True to enable concurrent requests, False to disable multiple threads. If enabled `os.cpu_count()` will be used as the max number of threads. If integer is provided, specified number is used.
- **boto3\_session** (`boto3.Session(), optional`) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.
- **s3\_additional\_kwargs** (`Optional[Dict[str, Any]]`) – Forward to botocore requests, only “SSECustomerAlgorithm” and “SSECustomerKey” arguments will be considered.

### Return type

None

## Examples

Uploading a file using a path to local file

```
>>> import awswrangler as wr
>>> wr.s3.upload(local_file='./key', path='s3://bucket/key')
```

Uploading a file using a file-like object

```
>>> import awswrangler as wr
>>> with open(file='./key', mode='wb') as local_f:
>>>     wr.s3.upload(local_file=local_f, path='s3://bucket/key')
```

**awswrangler.s3.wait\_objects\_exist**

```
awswrangler.s3.wait_objects_exist(paths: List[str], delay: float | None = None, max_attempts: int | None = None, use_threads: bool | int = True, boto3_session: Session | None = None) → None
```

Wait Amazon S3 objects exist.

Polls S3.Client.head\_object() every 5 seconds (default) until a successful state is reached. An error is returned after 20 (default) failed checks. <https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/s3.html#S3.Waiter.ObjectExists>

---

**Note:** In case of *use\_threads=True* the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

**Note:** Following arguments are not supported in distributed mode with engine *EngineEnum.RAY*:

- `boto3_session`
- 

**Parameters**

- **paths** (`List[str]`) – List of S3 objects paths (e.g. [s3://bucket/key0, s3://bucket/key1]).
- **delay** (`Union[int, float]`, *optional*) – The amount of time in seconds to wait between attempts. Default: 5
- **max\_attempts** (`int`, *optional*) – The maximum number of attempts to be made. Default: 20
- **use\_threads** (`bool`, `int`) – True to enable concurrent requests, False to disable multiple threads. If enabled `os.cpu_count()` will be used as the max number of threads. If integer is provided, specified number is used.
- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

**Returns**

None.

**Return type**

None

**Examples**

```
>>> import awswrangler as wr
>>> wr.s3.wait_objects_exist(['s3://bucket/key0', 's3://bucket/key1']) # wait both objects
```

## awswrangler.s3.wait\_objects\_not\_exist

```
awswrangler.s3.wait_objects_not_exist(paths: List[str], delay: float | None = None, max_attempts: int | None = None, use_threads: bool | int = True, boto3_session: Session | None = None) → None
```

Wait Amazon S3 objects not exist.

Polls S3.Client.head\_object() every 5 seconds (default) until a successful state is reached. An error is returned after 20 (default) failed checks. <https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/s3.html#S3.Waiter.ObjectNotExists>

---

**Note:** In case of *use\_threads=True* the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

**Note:** Following arguments are not supported in distributed mode with engine *EngineEnum.RAY*:

- `boto3_session`
- 

### Parameters

- `paths` (`List[str]`) – List of S3 objects paths (e.g. [s3://bucket/key0, s3://bucket/key1]).
- `delay` (`Union[int, float]`, *optional*) – The amount of time in seconds to wait between attempts. Default: 5
- `max_attempts` (`int`, *optional*) – The maximum number of attempts to be made. Default: 20
- `use_threads` (`bool`, `int`) – True to enable concurrent requests, False to disable multiple threads. If enabled `os.cpu_count()` will be used as the max number of threads. If integer is provided, specified number is used.
- `boto3_session` (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

### Returns

None.

### Return type

None

## Examples

```
>>> import awswrangler as wr
>>> wr.s3.wait_objects_not_exist(['s3://bucket/key0', 's3://bucket/key1']) # wait until both objects not exist
```

## 1.9.2 AWS Glue Catalog

<code>add_column(database, table, column_name[, ...])</code>	Add a column in a AWS Glue Catalog table.
<code>add_csv_partitions(database, table, ...[, ...])</code>	Add partitions (metadata) to a CSV Table in the AWS Glue Catalog.
<code>add_parquet_partitions(database, table, ...)</code>	Add partitions (metadata) to a Parquet Table in the AWS Glue Catalog.
<code>create_csv_table(database, table, path, ...)</code>	Create a CSV Table (Metadata Only) in the AWS Glue Catalog.
<code>create_database(name[, description, ...])</code>	Create a database in AWS Glue Catalog.
<code>create_json_table(database, table, path, ...)</code>	Create a JSON Table (Metadata Only) in the AWS Glue Catalog.
<code>create_parquet_table(database, table, path, ...)</code>	Create a Parquet Table (Metadata Only) in the AWS Glue Catalog.
<code>databases([limit, catalog_id, boto3_session])</code>	Get a Pandas DataFrame with all listed databases.
<code>delete_column(database, table, column_name)</code>	Delete a column in a AWS Glue Catalog table.
<code>delete_database(name[, catalog_id, ...])</code>	Delete a database in AWS Glue Catalog.
<code>delete_partitions(table, database, ...[, ...])</code>	Delete specified partitions in a AWS Glue Catalog table.
<code>delete_all_partitions(table, database[, ...])</code>	Delete all partitions in a AWS Glue Catalog table.
<code>delete_table_if_exists(database, table[, ...])</code>	Delete Glue table if exists.
<code>does_table_exist(database, table[, ...])</code>	Check if the table exists.
<code>drop_duplicated_columns(df)</code>	Drop all repeated columns (duplicated names).
<code>extract_athena_types(df[, index, ...])</code>	Extract columns and partitions types (Amazon Athena) from Pandas DataFrame.
<code>get_columns_comments(database, table[, ...])</code>	Get all columns comments.
<code>get_csv_partitions(database, table[, ...])</code>	Get all partitions from a Table in the AWS Glue Catalog.
<code>get_databases([catalog_id, boto3_session])</code>	Get an iterator of databases.
<code>get_parquet_partitions(database, table[, ...])</code>	Get all partitions from a Table in the AWS Glue Catalog.
<code>get_partitions(database, table[, ...])</code>	Get all partitions from a Table in the AWS Glue Catalog.
<code>get_table_description(database, table[, ...])</code>	Get table description.
<code>get_table_location(database, table[, ...])</code>	Get table's location on Glue catalog.
<code>get_table_number_of_versions(database, table)</code>	Get total number of versions.
<code>get_table_parameters(database, table[, ...])</code>	Get all parameters.
<code>get_table_types(database, table[, ...])</code>	Get all columns and types from a table.
<code>get_table_versions(database, table[, ...])</code>	Get all versions.
<code>get_tables([catalog_id, database, ...])</code>	Get an iterator of tables.
<code>overwrite_table_parameters(parameters, ...)</code>	Overwrite all existing parameters.
<code>sanitize_column_name(column)</code>	Convert the column name to be compatible with Amazon Athena and the AWS Glue Catalog.
<code>sanitize_dataframe_columns_names(df[, ...])</code>	Normalize all columns names to be compatible with Amazon Athena.
<code>sanitize_table_name(table)</code>	Convert the table name to be compatible with Amazon Athena and the AWS Glue Catalog.
<code>search_tables(text[, catalog_id, boto3_session])</code>	Get Pandas DataFrame of tables filtered by a search string.
<code>table(database, table[, transaction_id, ...])</code>	Get table details as Pandas DataFrame.
<code>tables([limit, catalog_id, database, ...])</code>	Get a DataFrame with tables filtered by a search term, prefix, suffix.
<code>upsert_table_parameters(parameters, ...[, ...])</code>	Insert or Update the received parameters.

## awswrangler.catalog.add\_column

```
awswrangler.catalog.add_column(database: str, table: str, column_name: str, column_type: str = 'string',
                               column_comment: str | None = None, transaction_id: str | None = None,
                               boto3_session: Session | None = None, catalog_id: str | None = None) →
    None
```

Add a column in a AWS Glue Catalog table.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- `database (str)` – Database name.
- `table (str)` – Table name.
- `column_name (str)` – Column name
- `column_type (str)` – Column type.
- `column_comment (str)` – Column Comment
- `transaction_id (str, optional)` – The ID of the transaction (i.e. used with GOVERNED tables).
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.
- `catalog_id (str, optional)` – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.

### Returns

None

### Return type

None

## Examples

```
>>> import awswrangler as wr
>>> wr.catalog.add_column(
...     database='my_db',
...     table='my_table',
...     column_name='my_col',
...     column_type='int'
... )
```

## `awswrangler.catalog.add_csv_partitions`

```
awswrangler.catalog.add_csv_partitions(database: str, table: str, partitions_values: Dict[str, List[str]], bucketing_info: Tuple[List[str], int] | None = None, catalog_id: str | None = None, compression: str | None = None, sep: str = ',', serde_library: str | None = None, serde_parameters: Dict[str, str] | None = None, boto3_session: Session | None = None, columns_types: Dict[str, str] | None = None, partitions_parameters: Dict[str, str] | None = None) → None
```

Add partitions (metadata) to a CSV Table in the AWS Glue Catalog.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- **database (str)** – Database name.
- **table (str)** – Table name.
- **partitions\_values (Dict[str, List[str]])** – Dictionary with keys as S3 path locations and values as a list of partitions values as str (e.g. {‘s3://bucket/prefix/y=2020/m=10’: [‘2020’, ‘10’]}).
- **bucketing\_info (Tuple[List[str], int], optional)** – Tuple consisting of the column names used for bucketing as the first element and the number of buckets as the second element. Only `str`, `int` and `bool` are supported as column data types for bucketing.
- **catalog\_id (str, optional)** – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **compression (str, optional)** – Compression style (`None`, `gzip`, etc).
- **sep (str)** – String of length 1. Field delimiter for the output file.
- **serde\_library (Optional[str])** – Specifies the SerDe Serialization library which will be used. You need to provide the Class library name as a string. If no library is provided the default is `org.apache.hadoop.hive.serde2.lazy.LazySimpleSerDe`.
- **serde\_parameters (Optional[Dict[str, str]])** – Dictionary of initialization parameters for the SerDe. The default is {“field.delim”: `sep`, “escape.delim”: “\”}.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default `boto3` session will be used if `boto3_session` receive `None`.
- **columns\_types (Optional[Dict[str, str]])** – Only required for Hive compatibility. Dictionary with keys as column names and values as data types (e.g. {‘col0’: ‘bigint’, ‘col1’: ‘double’}). P.S. Only materialized columns please, not partition columns.
- **partitions\_parameters (Optional[Dict[str, str]])** – Dictionary with key-value pairs defining partition parameters.

### Returns

`None`.

**Return type**

None

**Examples**

```
>>> import awswrangler as wr
>>> wr.catalog.add_csv_partitions(
...     database='default',
...     table='my_table',
...     partitions_values={
...         's3://bucket/prefix/y=2020/m=10/': ['2020', '10'],
...         's3://bucket/prefix/y=2020/m=11/': ['2020', '11'],
...         's3://bucket/prefix/y=2020/m=12/': ['2020', '12']
...     }
... )
```

**awswrangler.catalog.add\_parquet\_partitions**

```
awswrangler.catalog.add_parquet_partitions(database: str, table: str, partitions_values: Dict[str, List[str]], bucketing_info: Tuple[List[str], int] | None = None, catalog_id: str | None = None, compression: str | None = None, boto3_session: Session | None = None, columns_types: Dict[str, str] | None = None, partitions_parameters: Dict[str, str] | None = None) → None
```

Add partitions (metadata) to a Parquet Table in the AWS Glue Catalog.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

**Parameters**

- **database (str)** – Database name.
- **table (str)** – Table name.
- **partitions\_values (Dict[str, List[str]])** – Dictionary with keys as S3 path locations and values as a list of partitions values as str (e.g. {‘s3://bucket/prefix/y=2020/m=10’: [‘2020’, ‘10’]}).
- **bucketing\_info (Tuple[List[str], int], optional)** – Tuple consisting of the column names used for bucketing as the first element and the number of buckets as the second element. Only `str`, `int` and `bool` are supported as column data types for bucketing.
- **catalog\_id (str, optional)** – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **compression (str, optional)** – Compression style (None, snappy, gzip, etc).

- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.
- **columns\_types** (*Optional[Dict[str, str]]*) – Only required for Hive compatibility. Dictionary with keys as column names and values as data types (e.g. `{'col0': 'bigint', 'col1': 'double'}`). P.S. Only materialized columns please, not partition columns.
- **partitions\_parameters** (*Optional[Dict[str, str]]*) – Dictionary with key-value pairs defining partition parameters.

**Returns**

None.

**Return type**

None

**Examples**

```
>>> import awswrangler as wr
>>> wr.catalog.add_parquet_partitions(
...     database='default',
...     table='my_table',
...     partitions_values={
...         's3://bucket/prefix/y=2020/m=10/': ['2020', '10'],
...         's3://bucket/prefix/y=2020/m=11/': ['2020', '11'],
...         's3://bucket/prefix/y=2020/m=12/': ['2020', '12']
...     }
... )
```

**awswrangler.catalog.create\_csv\_table**

`awswrangler.catalog.create_csv_table`(`database: str, table: str, path: str, columns_types: Dict[str, str], table_type: str | None = None, partitions_types: Dict[str, str] | None = None, bucketing_info: Tuple[List[str], int] | None = None, compression: str | None = None, description: str | None = None, parameters: Dict[str, str] | None = None, columns_comments: Dict[str, str] | None = None, mode: Literal['overwrite', 'append'] = 'overwrite', catalog_versioning: bool = False, schema_evolution: bool = False, sep: str = ',', skip_header_line_count: int | None = None, serde_library: str | None = None, serde_parameters: Dict[str, str] | None = None, transaction_id: str | None = None, boto3_session: Session | None = None, athena_partition_projection_settings: AthenaPartitionProjectionSettings | None = None, catalog_id: str | None = None) → None`

Create a CSV Table (Metadata Only) in the AWS Glue Catalog.

[‘`https://docs.aws.amazon.com/athena/latest/ug/data-types.html`’](https://docs.aws.amazon.com/athena/latest/ug/data-types.html)

---

**Note:** Athena requires the columns in the underlying CSV files in S3 to be in the same order as the columns in the Glue data catalog.

---

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

## Parameters

- **database** (`str`) – Database name.
- **table** (`str`) – Table name.
- **path** (`str`) – Amazon S3 path (e.g. `s3://bucket/prefix/`).
- **columns\_types** (`Dict[str, str]`) – Dictionary with keys as column names and values as data types (e.g. `{'col0': 'bigint', 'col1': 'double'}`).
- **table\_type** (`str, optional`) – The type of the Glue Table (EXTERNAL\_TABLE, GOVERNED...). Set to EXTERNAL\_TABLE if None
- **partitions\_types** (`Dict[str, str], optional`) – Dictionary with keys as partition names and values as data types (e.g. `{'col2': 'date'}`).
- **bucketing\_info** (`Tuple[List[str], int], optional`) – Tuple consisting of the column names used for bucketing as the first element and the number of buckets as the second element. Only `str, int` and `bool` are supported as column data types for bucketing.
- **compression** (`str, optional`) – Compression style (None, gzip, etc).
- **description** (`str, optional`) – Table description
- **parameters** (`Dict[str, str], optional`) – Key/value pairs to tag the table.
- **columns\_comments** (`Dict[str, str], optional`) – Columns names and the related comments (e.g. `{'col0': 'Column 0.', 'col1': 'Column 1.', 'col2': 'Partition.'}`).
- **mode** (`str`) – ‘overwrite’ to recreate any possible existing table or ‘append’ to keep any possible existing table.
- **catalog\_versioning** (`bool`) – If True and `mode="overwrite"`, creates an archived version of the table catalog before updating it.
- **schema\_evolution** (`bool`) – If True allows schema evolution (new or missing columns), otherwise a exception will be raised. (Only considered if `dataset=True` and mode in (“append”, “overwrite\_partitions”)) Related tutorial: <https://aws-sdk-pandas.readthedocs.io/en/2.11.0/tutorials/014%20-%20Schema%20Evolution.html>
- **sep** (`str`) – String of length 1. Field delimiter for the output file.
- **skip\_header\_line\_count** (`Optional[int]`) – Number of Lines to skip regarding to the header.
- **serde\_library** (`Optional[str]`) – Specifies the SerDe Serialization library which will be used. You need to provide the Class library name as a string. If no library is provided the default is `org.apache.hadoop.hive.serde2.lazy.LazySimpleSerDe`.
- **serde\_parameters** (`Optional[str]`) – Dictionary of initialization parameters for the SerDe. The default is `{"field.delim": sep, "escape.delim": "\\"}`.

- **transaction\_id** (*str, optional*) – The ID of the transaction (i.e. used with GOVERNED tables).
- **athena\_partition\_projection\_settings** (*AthenaPartitionProjectionSettings, optional*) – Parameters of the Athena Partition Projection (<https://docs.aws.amazon.com/athena/latest/ug/partition-projection.html>). AthenaPartitionProjectionSettings is a *TypedDict*, meaning the passed parameter can be instantiated either as an instance of AthenaPartitionProjectionSettings or as a regular Python dict.

Following projection parameters are supported:

Table 8: Projection Parameters

Name	Type	Description
projec- tion_types	Op- tional[ <i>str</i> ]	Dictionary of partitions names and Athena projections types. Valid types: “enum”, “integer”, “date”, “injected” <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘enum’, ‘col2_name’: ‘integer’})
projec- tion_range	Op- tional[ <i>str</i> ]	Dictionary of partitions names and Athena projections ranges. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘0,10’, ‘col2_name’: ‘-1,8675309’})
projec- tion_value	Op- tional[ <i>str</i> ]	Dictionary of partitions names and Athena projections values. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘A,B,Unknown’, ‘col2_name’: ‘foo,boo,bar’})
projec- tion_inter- vals	Op- tional[ <i>str</i> ]	Dictionary of partitions names and Athena projections intervals. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘1’, ‘col2_name’: ‘5’})
projec- tion_digits	Op- tional[ <i>str</i> ]	Dictionary of partitions names and Athena projections digits. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘1’, ‘col2_name’: ‘2’})
projec- tion_form- ats	Op- tional[ <i>str</i> ]	Dictionary of partitions names and Athena projections formats. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_date’: ‘yyyy-MM-dd’, ‘col2_timestamp’: ‘yyyy-MM-dd HH:mm:ss’})
projec- tion_stora- ge	Op- tional[ <i>str</i> ]	Value which allows Athena to properly map partition values if the S3 file locations do not follow a typical <i>.../column=value/...</i> pattern. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html</a> (e.g. s3://bucket/table_root/a=\${a}/\${b}/some_static_subdirectory/\${c}/)

- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.

## Returns

None.

## Return type

None

## Examples

```
>>> import awswrangler as wr
>>> wr.catalog.create_csv_table(
...     database='default',
...     table='my_table',
...     path='s3://bucket/prefix/',
...     columns_types={'col0': 'bigint', 'col1': 'double'},
...     partitions_types={'col2': 'date'},
...     compression='gzip',
...     description='My own table!',
...     parameters={'source': 'postgresql'},
...     columns_comments={'col0': 'Column 0.', 'col1': 'Column 1.', 'col2':
... 'Partition.'}
... )
```

## awswrangler.catalog.create\_database

```
awswrangler.catalog.create_database(name: str, description: str | None = None, catalog_id: str | None =
None, exist_ok: bool = False, database_input_args: Dict[str, Any] | None = None, boto3_session: Session | None = None) → None
```

Create a database in AWS Glue Catalog.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- `name (str)` – Database name.
- `description (str, optional)` – A description for the Database.
- `catalog_id (str, optional)` – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- `exist_ok (bool)` – If set to True will not raise an Exception if a Database with the same already exists. In this case the description will be updated if it is different from the current one.
- `database_input_args (dict[str, Any], optional)` – Additional metadata to pass to database creation. Supported arguments listed here: [https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/glue.html#Glue.Client.create\\_database](https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/glue.html#Glue.Client.create_database)
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

### Returns

None.

### Return type

None

## Examples

```
>>> import awswrangler as wr
>>> wr.catalog.create_database(
...     name='awswrangler_test'
... )
```

### `awswrangler.catalog.create_json_table`

`awswrangler.catalog.create_json_table`(*database*: str, *table*: str, *path*: str, *columns\_types*: Dict[str, str], *table\_type*: str | None = None, *partitions\_types*: Dict[str, str] | None = None, *bucketing\_info*: Tuple[List[str], int] | None = None, *compression*: str | None = None, *description*: str | None = None, *parameters*: Dict[str, str] | None = None, *columns\_comments*: Dict[str, str] | None = None, *mode*: Literal['overwrite', 'append'] = 'overwrite', *catalog\_versioning*: bool = False, *schema\_evolution*: bool = False, *serde\_library*: str | None = None, *serde\_parameters*: Dict[str, str] | None = None, *transaction\_id*: str | None = None, *boto3\_session*: Session | None = None, *athena\_partition\_projection\_settings*: AthenaPartitionProjectionSettings | None = None, *catalog\_id*: str | None = None) → None

Create a JSON Table (Metadata Only) in the AWS Glue Catalog.

[‘https://docs.aws.amazon.com/athena/latest/ug/data-types.html’](https://docs.aws.amazon.com/athena/latest/ug/data-types.html)

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

## Parameters

- **`database` (str)** – Database name.
- **`table` (str)** – Table name.
- **`path` (str)** – Amazon S3 path (e.g. s3://bucket/prefix/).
- **`columns_types` (Dict[str, str])** – Dictionary with keys as column names and values as data types (e.g. {‘col0’: ‘bigint’, ‘col1’: ‘double’}).
- **`table_type` (str, optional)** – The type of the Glue Table (EXTERNAL\_TABLE, GOVERNED...). Set to EXTERNAL\_TABLE if None
- **`partitions_types` (Dict[str, str], optional)** – Dictionary with keys as partition names and values as data types (e.g. {‘col2’: ‘date’}).
- **`bucketing_info` (Tuple[List[str], int], optional)** – Tuple consisting of the column names used for bucketing as the first element and the number of buckets as the second element. Only *str*, *int* and *bool* are supported as column data types for bucketing.
- **`compression` (str, optional)** – Compression style (None, gzip, etc).

- **description** (*str, optional*) – Table description
- **parameters** (*Dict[str, str], optional*) – Key/value pairs to tag the table.
- **columns\_comments** (*Dict[str, str], optional*) – Columns names and the related comments (e.g. {‘col0’: ‘Column 0.’, ‘col1’: ‘Column 1.’, ‘col2’: ‘Partition.’}).
- **mode** (*str*) – ‘overwrite’ to recreate any possible existing table or ‘append’ to keep any possible existing table.
- **catalog\_versioning** (*bool*) – If True and *mode=“overwrite”*, creates an archived version of the table catalog before updating it.
- **schema\_evolution** (*bool*) – If True allows schema evolution (new or missing columns), otherwise a exception will be raised. (Only considered if dataset=True and mode in (“append”, “overwrite\_partitions”)) Related tutorial: <https://aws-sdk-pandas.readthedocs.io/en/2.11.0/tutorials/014%20-%20Schema%20Evolution.html>
- **serde\_library** (*Optional[str]*) – Specifies the SerDe Serialization library which will be used. You need to provide the Class library name as a string. If no library is provided the default is *org.openx.data.jsonserde.JsonSerDe*.
- **serde\_parameters** (*Optional[str]*) – Dictionary of initialization parameters for the SerDe. The default is {“field.delim”: *sep*, “escape.delim”: “\”}.
- **transaction\_id** (*str, optional*) – The ID of the transaction (i.e. used with GOVERNED tables).
- **athena\_partition\_projection\_settings** (*AthenaPartitionProjectionSettings, optional*) – Parameters of the Athena Partition Projection (<https://docs.aws.amazon.com/athena/latest/ug/partition-projection.html>). *AthenaPartitionProjectionSettings* is a *TypedDict*, meaning the passed parameter can be instantiated either as an instance of *AthenaPartitionProjectionSettings* or as a regular Python dict.

Following projection parameters are supported:

Table 9: Projection Parameters

Name	Type	Description
projec- tion_types	Op- tional[ str]]	Dictionary of partitions names and Athena projections types. Valid types: “enum”, “integer”, “date”, “injected” <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘enum’, ‘col2_name’: ‘integer’})
projec- tion_range	Op- tional[ str]]	Dictionary of partitions names and Athena projections ranges. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘0,10’, ‘col2_name’: ‘-1,8675309’})
projec- tion_value	Op- tional[ str]]	Dictionary of partitions names and Athena projections values. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘A,B,Unknown’, ‘col2_name’: ‘foo,boo,bar’})
projec- tion_inter- vals	Op- tional[ str]]	Dictionary of partitions names and Athena projections intervals. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘1’, ‘col2_name’: ‘5’})
projec- tion_digits	Op- tional[ str]]	Dictionary of partitions names and Athena projections digits. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘1’, ‘col2_name’: ‘2’})
projec- tion_form- ats	Op- tional[ str]]	Dictionary of partitions names and Athena projections formats. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_date’: ‘yyyy-MM-dd’, ‘col2_timestamp’: ‘yyyy-MM-dd HH:mm:ss’})
projec- tion_stora- ge	Op- tional[ str]]	Value which allows Athena to properly map partition values if the S3 file locations do not follow a typical .../column=value/... pattern. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html</a> (e.g. s3://bucket/table_root/a=\${a}/\${b}/some_static_subdirectory/\${c}/)

- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.
- **catalog\_id** (`str`, *optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.

**Returns**

None.

**Return type**

None

## Examples

```
>>> import awswrangler as wr
>>> wr.catalog.create_json_table(
...     database='default',
...     table='my_table',
...     path='s3://bucket/prefix/',
...     columns_types={'col0': 'bigint', 'col1': 'double'},
...     partitions_types={'col2': 'date'},
...     description='My very own JSON table!',
...     parameters={'source': 'postgresql'},
...     columns_comments={'col0': 'Column 0.', 'col1': 'Column 1.', 'col2':
... 'Partition.'}
... )
```

### `awswrangler.catalog.create_parquet_table`

```
awswrangler.catalog.create_parquet_table(database: str, table: str, path: str, columns_types: Dict[str,
str], table_type: str | None = None, partitions_types: Dict[str,
str] | None = None, bucketing_info: Tuple[List[str], int] | None
= None, catalog_id: str | None = None, compression: str |
None = None, description: str | None = None, parameters:
Dict[str, str] | None = None, columns_comments: Dict[str, str]
| None = None, mode: Literal['overwrite', 'append'] =
'overwrite', catalog_versioning: bool = False, transaction_id:
str | None = None, athena_partition_projection_settings:
AthenaPartitionProjectionSettings | None = None,
boto3_session: Session | None = None) → None
```

Create a Parquet Table (Metadata Only) in the AWS Glue Catalog.

[‘https://docs.aws.amazon.com/athena/latest/ug/data-types.html’](https://docs.aws.amazon.com/athena/latest/ug/data-types.html)

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

## Parameters

- **database (str)** – Database name.
- **table (str)** – Table name.
- **path (str)** – Amazon S3 path (e.g. `s3://bucket/prefix/`).
- **columns\_types (Dict[str, str])** – Dictionary with keys as column names and values as data types (e.g. `{'col0': 'bigint', 'col1': 'double'}`).
- **table\_type (str, optional)** – The type of the Glue Table (EXTERNAL\_TABLE, GOVERNED...). Set to EXTERNAL\_TABLE if None

- **partitions\_types** (`Dict[str, str]`, *optional*) – Dictionary with keys as partition names and values as data types (e.g. `{'col2': 'date'}`).
- **bucketing\_info** (`Tuple[List[str], int]`, *optional*) – Tuple consisting of the column names used for bucketing as the first element and the number of buckets as the second element. Only `str`, `int` and `bool` are supported as column data types for bucketing.
- **catalog\_id** (`str`, *optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **compression** (`str`, *optional*) – Compression style (`None`, `snappy`, `gzip`, etc).
- **description** (`str`, *optional*) – Table description
- **parameters** (`Dict[str, str]`, *optional*) – Key/value pairs to tag the table.
- **columns\_comments** (`Dict[str, str]`, *optional*) – Columns names and the related comments (e.g. `{'col0': 'Column 0.', 'col1': 'Column 1.', 'col2': 'Partition.'}`).
- **mode** (`str`) – ‘overwrite’ to recreate any possible existing table or ‘append’ to keep any possible existing table.
- **catalog\_versioning** (`bool`) – If True and `mode="overwrite"`, creates an archived version of the table catalog before updating it.
- **transaction\_id** (`str`, *optional*) – The ID of the transaction (i.e. used with GOVERNED tables).
- **athena\_partition\_projection\_settings** (`AthenaPartitionProjectionSettings`, *optional*) – Parameters of the Athena Partition Projection (<https://docs.aws.amazon.com/athena/latest/ug/partition-projection.html>). `AthenaPartitionProjectionSettings` is a `TypedDict`, meaning the passed parameter can be instantiated either as an instance of `AthenaPartitionProjectionSettings` or as a regular Python dict.

Following projection parameters are supported:

Table 10: Projection Parameters

Name	Type	Description
projec- tion_types	Op- tional[ str]]	Dictionary of partitions names and Athena projections types. Valid types: “enum”, “integer”, “date”, “injected” <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘enum’, ‘col2_name’: ‘integer’})
projec- tion_range	Op- tional[ str]]	Dictionary of partitions names and Athena projections ranges. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘0,10’, ‘col2_name’: ‘-1,8675309’})
projec- tion_value	Op- tional[ str]]	Dictionary of partitions names and Athena projections values. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘A,B,Unknown’, ‘col2_name’: ‘foo,boo,bar’})
projec- tion_inter- vals	Op- tional[ str]]	Dictionary of partitions names and Athena projections intervals. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘1’, ‘col2_name’: ‘5’})
projec- tion_digits	Op- tional[ str]]	Dictionary of partitions names and Athena projections digits. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_name’: ‘1’, ‘col2_name’: ‘2’})
projec- tion_form- ats	Op- tional[ str]]	Dictionary of partitions names and Athena projections formats. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html</a> (e.g. {‘col_date’: ‘yyyy-MM-dd’, ‘col2_timestamp’: ‘yyyy-MM-dd HH:mm:ss’})
projec- tion_stora- ge	Op- tional[ str]]	Value which allows Athena to properly map partition values if the S3 file locations do not follow a typical .../column=value/... pattern. <a href="https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html">https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html</a> (e.g. s3://bucket/table_root/a=\${a}/\${b}/some_static_subdirectory/\${c}/)

- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

**Returns**

None.

**Return type**

None

**Examples**

```
>>> import awswrangler as wr
>>> wr.catalog.create_parquet_table(
...     database='default',
...     table='my_table',
...     path='s3://bucket/prefix/',
...     columns_types={'col0': 'bigint', 'col1': 'double'},
...     partitions_types={'col2': 'date'},
...     compression='snappy',
```

(continues on next page)

(continued from previous page)

```

...     description='My own table!',
...     parameters={'source': 'postgresql'},
...     columns_comments={'col0': 'Column 0.', 'col1': 'Column 1.', 'col2':
...     'Partition.'}
...
)

```

## awswrangler.catalog.databases

`awswrangler.catalog.databases(limit: int = 100, catalog_id: str | None = None, boto3_session: Session | None = None) → DataFrame`

Get a Pandas DataFrame with all listed databases.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- `limit (int, optional)` – Max number of tables to be returned.
- `catalog_id (str, optional)` – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

### Returns

Pandas DataFrame filled by formatted table information.

### Return type

`pandas.DataFrame`

## Examples

```

>>> import awswrangler as wr
>>> df_dbs = wr.catalog.databases()

```

## awswrangler.catalog.delete\_column

`awswrangler.catalog.delete_column(database: str, table: str, column_name: str, transaction_id: str | None = None, boto3_session: Session | None = None, catalog_id: str | None = None) → None`

Delete a column in a AWS Glue Catalog table.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`

- database

Check out the [Global Configurations Tutorial](#) for details.

---

#### Parameters

- **database** (*str*) – Database name.
- **table** (*str*) – Table name.
- **column\_name** (*str*) – Column name
- **transaction\_id** (*str, optional*) – The ID of the transaction (i.e. used with GOVERNED tables).
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.

#### Returns

None

#### Return type

None

#### Examples

```
>>> import awswrangler as wr
>>> wr.catalog.delete_column(
...     database='my_db',
...     table='my_table',
...     column_name='my_col',
... )
```

## awswrangler.catalog.delete\_database

`awswrangler.catalog.delete_database(name: str, catalog_id: str | None = None, boto3_session: Session | None = None) → None`

Delete a database in AWS Glue Catalog.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- catalog\_id

Check out the [Global Configurations Tutorial](#) for details.

---

#### Parameters

- **name** (*str*) – Database name.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.

- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

None.

**Return type**

None

**Examples**

```
>>> import awswrangler as wr
>>> wr.catalog.delete_database(
...     name='awswrangler_test'
... )
```

**awswrangler.catalog.delete\_partitions**

`awswrangler.catalog.delete_partitions`(*table*: str, *database*: str, *partitions\_values*: List[List[str]], *catalog\_id*: str | None = None, *boto3\_session*: Session | None = None) → None

Delete specified partitions in a AWS Glue Catalog table.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

**Parameters**

- **table** (str) – Table name.
- **database** (str) – Table name.
- **catalog\_id** (str, *optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **partitions\_values** (List[List[str]]) – List of lists of partitions values as strings. (e.g. [[‘2020’, ‘10’, ‘25’], [‘2020’, ‘11’, ‘16’], [‘2020’, ‘12’, ‘19’]]).
- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

None.

**Return type**

None

## Examples

```
>>> import awswrangler as wr
>>> wr.catalog.delete_partitions(
...     table='my_table',
...     database='awswrangler_test',
...     partitions_values=[[['2020', '10', '25'], ['2020', '11', '16'], ['2020', '12',
...     '19']],
... )
```

## awswrangler.catalog.delete\_all\_partitions

`awswrangler.catalog.delete_all_partitions(table: str, database: str, catalog_id: str | None = None, boto3_session: Session | None = None) → List[List[str]]`

Delete all partitions in a AWS Glue Catalog table.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- `table (str)` – Table name.
- `database (str)` – Table name.
- `catalog_id (str, optional)` – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

### Returns

Partitions values.

### Return type

`List[List[str]]`

## Examples

```
>>> import awswrangler as wr
>>> partitions = wr.catalog.delete_all_partitions(
...     table='my_table',
...     database='awswrangler_test',
... )
```

**awswrangler.catalog.delete\_table\_if\_exists**

```
awswrangler.catalog.delete_table_if_exists(database: str, table: str, transaction_id: str | None = None,
                                         catalog_id: str | None = None, boto3_session: Session | None = None) → bool
```

Delete Glue table if exists.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

**Parameters**

- `database (str)` – Database name.
- `table (str)` – Table name.
- `transaction_id (str, optional)` – The ID of the transaction (i.e. used with GOVERNED tables).
- `catalog_id (str, optional)` – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

**Returns**

True if deleted, otherwise False.

**Return type**

`bool`

**Examples**

```
>>> import awswrangler as wr
>>> wr.catalog.delete_table_if_exists(database='default', table='my_table') #_
  ↵deleted
True
>>> wr.catalog.delete_table_if_exists(database='default', table='my_table') #_
  ↵Nothing to be deleted
False
```

## awswrangler.catalog.does\_table\_exist

```
awswrangler.catalog.does_table_exist(database: str, table: str, boto3_session: Session | None = None,  
                                      catalog_id: str | None = None, transaction_id: str | None = None)  
                                      → bool
```

Check if the table exists.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- `database (str)` – Database name.
- `table (str)` – Table name.
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.
- `catalog_id (str, optional)` – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- `transaction_id (str, optional)` – The ID of the transaction (i.e. used with GOVERNED tables).

### Returns

True if exists, otherwise False.

### Return type

bool

## Examples

```
>>> import awswrangler as wr  
>>> wr.catalog.does_table_exist(database='default', table='my_table')
```

## awswrangler.catalog.drop\_duplicated\_columns

```
awswrangler.catalog.drop_duplicated_columns(df: DataFrame) → DataFrame
```

Drop all repeated columns (duplicated names).

---

**Note:** This transformation will run *inplace* and will make changes in the original DataFrame.

---

---

**Note:** It is different from Panda's `drop_duplicates()` function which considers the column values. `wr.catalog.drop_duplicated_columns()` will deduplicate by column name.

---

**Parameters**

**df** (*pandas.DataFrame*) – Original Pandas DataFrame.

**Returns**

Pandas DataFrame without duplicated columns.

**Return type**

*pandas.DataFrame*

**Examples**

```
>>> import awswrangler as wr
>>> df = pd.DataFrame({"A": [1, 2], "B": [3, 4]})
>>> df.columns = ["A", "A"]
>>> wr.catalog.drop_duplicated_columns(df=df)
   A
0  1
1  2
```

**awswrangler.catalog.extract\_athena\_types**

**awswrangler.catalog.extract\_athena\_types**(*df: DataFrame, index: bool = False, partition\_cols: List[str] | None = None, dtype: Dict[str, str] | None = None, file\_format: str = 'parquet'*) → *Tuple[Dict[str, str], Dict[str, str]]*

Extract columns and partitions types (Amazon Athena) from Pandas DataFrame.

<https://docs.aws.amazon.com/athena/latest/ug/data-types.html>

**Parameters**

- **df** (*pandas.DataFrame*) – Pandas DataFrame.
- **index** (*bool*) – Should consider the DataFrame index as a column?.
- **partition\_cols** (*List[str]*, *optional*) – List of partitions names.
- **dtype** (*Dict[str, str]*, *optional*) – Dictionary of columns names and Athena/Glue types to be casted. Useful when you have columns with undetermined or mixed data types. (e.g. {‘col name’: ‘bigint’, ‘col2 name’: ‘int’})
- **file\_format** (*str*, *optional*) – File format to be considered to place the index column: “parquet” | “csv”.

**Returns**

**columns\_types**: Dictionary with keys as column names and values as data types (e.g. {‘col0’: ‘bigint’, ‘col1’: ‘double’}). / **partitions\_types**: Dictionary with keys as partition names and values as data types (e.g. {‘col2’: ‘date’}).

**Return type**

*Tuple[Dict[str, str], Dict[str, str]]*

## Examples

```
>>> import awswrangler as wr
>>> columns_types, partitions_types = wr.catalog.extract_athena_types(
...     df=df, index=False, partition_cols=["par0", "par1"], file_format="csv"
... )
```

### awswrangler.catalog.get\_columns\_comments

```
awswrangler.catalog.get_columns_comments(database: str, table: str, transaction_id: str | None = None, query_as_of_time: str | None = None, catalog_id: str | None = None, boto3_session: Session | None = None) → Dict[str, str]
```

Get all columns comments.

---

**Note:** If reading from a governed table, pass only one of *transaction\_id* or *query\_as\_of\_time*.

---

**Note:** This function has arguments which can be configured globally through *wr.config* or environment variables:

- **catalog\_id**
- **database**

Check out the [Global Configurations Tutorial](#) for details.

---

#### Parameters

- **database** (*str*) – Database name.
- **table** (*str*) – Table name.
- **transaction\_id** (*str, optional*) – The ID of the transaction (i.e. used with GOVERNED tables).
- **query\_as\_of\_time** (*str, optional*) – The time as of when to read the table contents. Must be a valid Unix epoch timestamp. Cannot be specified alongside transaction\_id.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

#### Returns

Columns comments. e.g. {"col1": "foo boo bar"}.

#### Return type

Dict[str, str]

## Examples

```
>>> import awswrangler as wr
>>> pars = wr.catalog.get_columns_comments(database="...", table="...")
```

### `awswrangler.catalog.get_csv_partitions`

`awswrangler.catalog.get_csv_partitions`(*database*: str, *table*: str, *expression*: str | None = None, *catalog\_id*: str | None = None, *boto3\_session*: Session | None = None) → Dict[str, List[str]]

Get all partitions from a Table in the AWS Glue Catalog.

Expression argument instructions: [https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/glue.html#Glue.Client.get\\_partitions](https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/glue.html#Glue.Client.get_partitions)

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

#### Parameters

- `database` (str) – Database name.
- `table` (str) – Table name.
- `expression` (str, optional) – An expression that filters the partitions to be returned.
- `catalog_id` (str, optional) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- `boto3_session` (boto3.Session(), optional) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

#### Returns

`partitions_values`: Dictionary with keys as S3 path locations and values as a list of partitions values as str (e.g. {‘s3://bucket/prefix/y=2020/m=10’: ['2020', ‘10’]}).

#### Return type

Dict[str, List[str]]

## Examples

Fetch all partitions

```
>>> import awswrangler as wr
>>> wr.catalog.get_csv_partitions(
...     database='default',
...     table='my_table',
... )
{
```

(continues on next page)

(continued from previous page)

```
's3://bucket/prefix/y=2020/m=10/': ['2020', '10'],
's3://bucket/prefix/y=2020/m=11/': ['2020', '11'],
's3://bucket/prefix/y=2020/m=12/': ['2020', '12']
}
```

Filtering partitions

```
>>> import awswrangler as wr
>>> wr.catalog.get_csv_partitions(
...     database='default',
...     table='my_table',
...     expression='m=10'
... )
{
    's3://bucket/prefix/y=2020/m=10/': ['2020', '10']
}
```

## awswrangler.catalog.get\_databases

awswrangler.catalog.get\_databases(*catalog\_id: str | None = None, boto3\_session: Session | None = None*)  
→ Iterator[Dict[str, Any]]

Get an iterator of databases.

### Parameters

- **catalog\_id (str, optional)** – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Iterator of Databases.

### Return type

Iterator[Dict[str, Any]]

## Examples

```
>>> import awswrangler as wr
>>> dbs = wr.catalog.get_databases()
```

## awswrangler.catalog.get\_parquet\_partitions

awswrangler.catalog.get\_parquet\_partitions(*database: str, table: str, expression: str | None = None, catalog\_id: str | None = None, boto3\_session: Session | None = None*) → Dict[str, List[str]]

Get all partitions from a Table in the AWS Glue Catalog.

Expression argument instructions: [https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/glue.html#Glue.Client.get\\_partitions](https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/glue.html#Glue.Client.get_partitions)

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- `database (str)` – Database name.
- `table (str)` – Table name.
- `expression (str, optional)` – An expression that filters the partitions to be returned.
- `catalog_id (str, optional)` – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

### Returns

`partitions_values`: Dictionary with keys as S3 path locations and values as a list of partitions values as str (e.g. `{'s3://bucket/prefix/y=2020/m=10/': ['2020', '10']}`).

### Return type

`Dict[str, List[str]]`

## Examples

Fetch all partitions

```
>>> import awswrangler as wr
>>> wr.catalog.get_parquet_partitions(
...     database='default',
...     table='my_table',
... )
{
    's3://bucket/prefix/y=2020/m=10/': ['2020', '10'],
    's3://bucket/prefix/y=2020/m=11/': ['2020', '11'],
    's3://bucket/prefix/y=2020/m=12/': ['2020', '12']
}
```

Filtering partitions

```
>>> import awswrangler as wr
>>> wr.catalog.get_parquet_partitions(
...     database='default',
...     table='my_table',
...     expression='m=10'
... )
{
    's3://bucket/prefix/y=2020/m=10/': ['2020', '10']
}
```

## awswrangler.catalog.get\_partitions

```
awswrangler.catalog.get_partitions(database: str, table: str, expression: str | None = None, catalog_id: str | None = None, boto3_session: Session | None = None) → Dict[str, List[str]]
```

Get all partitions from a Table in the AWS Glue Catalog.

Expression argument instructions: [https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/glue.html#Glue.Client.get\\_partitions](https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/glue.html#Glue.Client.get_partitions)

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- **database (str)** – Database name.
- **table (str)** – Table name.
- **expression (str, optional)** – An expression that filters the partitions to be returned.
- **catalog\_id (str, optional)** – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

### Returns

`partitions_values`: Dictionary with keys as S3 path locations and values as a list of partitions values as str (e.g. {‘s3://bucket/prefix/y=2020/m=10’: [‘2020’, ‘10’]}).

### Return type

`Dict[str, List[str]]`

## Examples

Fetch all partitions

```
>>> import awswrangler as wr
>>> wr.catalog.get_partitions(
...     database='default',
...     table='my_table',
... )
{
    's3://bucket/prefix/y=2020/m=10': ['2020', '10'],
    's3://bucket/prefix/y=2020/m=11': ['2020', '11'],
    's3://bucket/prefix/y=2020/m=12': ['2020', '12']
}
```

Filtering partitions

```
>>> import awswrangler as wr
>>> wr.catalog.get_partitions(
...     database='default',
...     table='my_table',
...     expression='m=10'
... )
{
    's3://bucket/prefix/y=2020/m=10/': ['2020', '10']
}
```

## awswrangler.catalog.get\_table\_description

`awswrangler.catalog.get_table_description(database: str, table: str, transaction_id: str | None = None, query_as_of_time: str | None = None, catalog_id: str | None = None, boto3_session: Session | None = None) → str | None`

Get table description.

---

**Note:** If reading from a governed table, pass only one of `transaction_id` or `query_as_of_time`.

---

### Parameters

- **database** (`str`) – Database name.
- **table** (`str`) – Table name.
- **transaction\_id** (`str, optional`) – The ID of the transaction (i.e. used with GOVERNED tables).
- **query\_as\_of\_time** (`str, optional`) – The time as of when to read the table contents. Must be a valid Unix epoch timestamp. Cannot be specified alongside `transaction_id`.
- **catalog\_id** (`str, optional`) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **boto3\_session** (`boto3.Session()`, `optional`) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

### Returns

Description if exists.

### Return type

`Optional[str]`

## Examples

```
>>> import awswrangler as wr
>>> desc = wr.catalog.get_table_description(database="...", table="...")
```

## awswrangler.catalog.get\_table\_location

```
awswrangler.catalog.get_table_location(database: str, table: str, transaction_id: str | None = None,  
query_as_of_time: str | None = None, catalog_id: str | None =  
None, boto3_session: Session | None = None) → str
```

Get table's location on Glue catalog.

---

**Note:** If reading from a governed table, pass only one of *transaction\_id* or *query\_as\_of\_time*.

---

**Note:** This function has arguments which can be configured globally through *wr.config* or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- `database (str)` – Database name.
- `table (str)` – Table name.
- `transaction_id (str, optional)` – The ID of the transaction (i.e. used with GOVERNED tables).
- `query_as_of_time (str, optional)` – The time as of when to read the table contents. Must be a valid Unix epoch timestamp. Cannot be specified alongside `transaction_id`.
- `catalog_id (str, optional)` – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

### Returns

Table's location.

### Return type

str

## Examples

```
>>> import awswrangler as wr  
>>> wr.catalog.get_table_location(database='default', table='my_table')  
's3://bucket/prefix/'
```

**awswrangler.catalog.get\_table\_number\_of\_versions**

```
awswrangler.catalog.get_table_number_of_versions(database: str, table: str, catalog_id: str | None = None, boto3_session: Session | None = None) → int
```

Get total number of versions.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

**Parameters**

- **database** (`str`) – Database name.
- **table** (`str`) – Table name.
- **catalog\_id** (`str, optional`) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **boto3\_session** (`boto3.Session()`, `optional`) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

**Returns**

Total number of versions.

**Return type**

`int`

**Examples**

```
>>> import awswrangler as wr
>>> num = wr.catalog.get_table_number_of_versions(database="...", table="...")
```

**awswrangler.catalog.get\_table\_parameters**

```
awswrangler.catalog.get_table_parameters(database: str, table: str, transaction_id: str | None = None, query_as_of_time: str | None = None, catalog_id: str | None = None, boto3_session: Session | None = None) → Dict[str, str]
```

Get all parameters.

---

**Note:** If reading from a governed table, pass only one of `transaction_id` or `query_as_of_time`.

---

**Parameters**

- `database` (`str`) – Database name.
- `table` (`str`) – Table name.

- **transaction\_id** (*str, optional*) – The ID of the transaction (i.e. used with GOVERNED tables).
- **query\_as\_of\_time** (*str, optional*) – The time as of when to read the table contents. Must be a valid Unix epoch timestamp. Cannot be specified alongside transaction\_id.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Dictionary of parameters.

**Return type**

Dict[str, str]

## Examples

```
>>> import awswrangler as wr
>>> pars = wr.catalog.get_table_parameters(database="...", table="...")
```

## awswrangler.catalog.get\_table\_types

```
awswrangler.catalog.get_table_types(database: str, table: str, transaction_id: str | None = None,
                                     query_as_of_time: str | None = None, catalog_id: str | None = None,
                                     boto3_session: Session | None = None) → Dict[str, str] | None
```

Get all columns and types from a table.

---

**Note:** If reading from a governed table, pass only one of *transaction\_id* or *query\_as\_of\_time*.

---

**Note:** This function has arguments which can be configured globally through *wr.config* or environment variables:

- catalog\_id
- database

Check out the [Global Configurations Tutorial](#) for details.

---

## Parameters

- **database** (*str*) – Database name.
- **table** (*str*) – Table name.
- **transaction\_id** (*str, optional*) – The ID of the transaction (i.e. used with GOVERNED tables).
- **query\_as\_of\_time** (*str, optional*) – The time as of when to read the table contents. Must be a valid Unix epoch timestamp. Cannot be specified alongside transaction\_id.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.

- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

If table exists, a dictionary like {‘col name’: ‘col data type’}. Otherwise None.

**Return type**

`Optional[Dict[str, str]]`

**Examples**

```
>>> import awswrangler as wr
>>> wr.catalog.get_table_types(database='default', table='my_table')
{'col0': 'int', 'col1': double}
```

**awswrangler.catalog.get\_table\_versions**

`awswrangler.catalog.get_table_versions(database: str, table: str, catalog_id: str | None = None, boto3_session: Session | None = None) → List[Dict[str, Any]]`

Get all versions.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

**Parameters**

- **database** (`str`) – Database name.
- **table** (`str`) – Table name.
- **catalog\_id** (`str, optional`) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

List of table inputs: [https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/glue.html#Glue.Client.get\\_table\\_versions](https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/glue.html#Glue.Client.get_table_versions)

**Return type**

`List[Dict[str, Any]]`

## Examples

```
>>> import awswrangler as wr
>>> tables_versions = wr.catalog.get_table_versions(database="...", table="...")
```

### awswrangler.catalog.get\_tables

```
awswrangler.catalog.get_tables(catalog_id: str | None = None, database: str | None = None, transaction_id: str | None = None, name_contains: str | None = None, name_prefix: str | None = None, name_suffix: str | None = None, boto3_session: Session | None = None) → Iterator[Dict[str, Any]]
```

Get an iterator of tables.

---

**Note:** Please, do not filter using name\_contains and name\_prefix/name\_suffix at the same time. Only name\_prefix and name\_suffix can be combined together.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

#### Parameters

- **`catalog_id` (str, optional)** – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **`database` (str, optional)** – Database name.
- **`transaction_id` (str, optional)** – The ID of the transaction (i.e. used with GOVERNED tables).
- **`name_contains` (str, optional)** – Select by a specific string on table name
- **`name_prefix` (str, optional)** – Select by a specific prefix on table name
- **`name_suffix` (str, optional)** – Select by a specific suffix on table name
- **`boto3_session` (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

#### Returns

Iterator of tables.

#### Return type

Iterator[Dict[str, Any]]

## Examples

```
>>> import awswrangler as wr
>>> tables = wr.catalog.get_tables()
```

### `awswrangler.catalog.overwrite_table_parameters`

`awswrangler.catalog.overwrite_table_parameters`(*parameters*: Dict[str, str], *database*: str, *table*: str, *transaction\_id*: str | None = None, *catalog\_versioning*: bool = False, *catalog\_id*: str | None = None, *boto3\_session*: Session | None = None) → Dict[str, str]

Overwrite all existing parameters.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

#### Parameters

- **parameters** (Dict[str, str]) – e.g. {"source": "mysql", "destination": "datalake"}
- **database** (str) – Database name.
- **table** (str) – Table name.
- **transaction\_id** (str, optional) – The ID of the transaction (i.e. used with GOVERNED tables).
- **catalog\_versioning** (bool) – If True and *mode*=”overwrite”, creates an archived version of the table catalog before updating it.
- **catalog\_id** (str, optional) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **boto3\_session** (boto3.Session(), optional) – Boto3 Session. The default boto3 session will be used if *boto3\_session* receive None.

#### Returns

All parameters after the overwrite (The same received).

#### Return type

Dict[str, str]

## Examples

```
>>> import awswrangler as wr
>>> pars = wr.catalog.overwrite_table_parameters(
...     parameters={"source": "mysql", "destination": "datalake"},
...     database="...",
...     table="...")
```

## awswrangler.catalog.sanitize\_column\_name

awswrangler.catalog.sanitize\_column\_name(*column: str*) → str

Convert the column name to be compatible with Amazon Athena and the AWS Glue Catalog.

<https://docs.aws.amazon.com/athena/latest/ug/tables-databases-columns-names.html>

Possible transformations: - Strip accents - Remove non alphanumeric characters

### Parameters

**column (str)** – Column name.

### Returns

Normalized column name.

### Return type

str

## Examples

```
>>> import awswrangler as wr
>>> wr.catalog.sanitize_column_name('MyNewColumn')
'mynewcolumn'
```

## awswrangler.catalog.sanitize\_dataframe\_columns\_names

awswrangler.catalog.sanitize\_dataframe\_columns\_names(*df: DataFrame, handle\_duplicate\_columns: str | None = 'warn'*) → DataFrame

Normalize all columns names to be compatible with Amazon Athena.

<https://docs.aws.amazon.com/athena/latest/ug/tables-databases-columns-names.html>

Possible transformations: - Strip accents - Remove non alphanumeric characters

---

**Note:** After transformation, some column names might not be unique anymore. Example: the columns [“A”, “a”] will be sanitized to [“a”, “a”]

---

### Parameters

- **df (pandas.DataFrame)** – Original Pandas DataFrame.
- **handle\_duplicate\_columns (str, optional)** – How to handle duplicate columns. Can be “warn” or “drop” or “rename”. “drop” will drop all but the first duplicated column. “rename” will rename all duplicated columns with an incremental number. Defaults to “warn”.

**Returns**

Original Pandas DataFrame with columns names normalized.

**Return type**

pandas.DataFrame

**Examples**

```
>>> import awswrangler as wr
>>> df_normalized = wr.catalog.sanitize_dataframe_columns_names(df=pd.DataFrame({"A": [1, 2]}))
>>> df_normalized_drop = wr.catalog.sanitize_dataframe_columns_names(
    df=pd.DataFrame({"A": [1, 2], "a": [3, 4]}), handle_duplicate_columns="drop"
)
>>> df_normalized_rename = wr.catalog.sanitize_dataframe_columns_names(
    df=pd.DataFrame({"A": [1, 2], "a": [3, 4], "a_1": [4, 6]}), handle_
    duplicate_columns="rename"
)
```

**awswrangler.catalog.sanitize\_table\_name**

`awswrangler.catalog.sanitize_table_name(table: str) → str`

Convert the table name to be compatible with Amazon Athena and the AWS Glue Catalog.

<https://docs.aws.amazon.com/athena/latest/ug/tables-databases-columns-names.html>

Possible transformations: - Strip accents - Remove non alphanumeric characters

**Parameters**

`table (str)` – Table name.

**Returns**

Normalized table name.

**Return type**

str

**Examples**

```
>>> import awswrangler as wr
>>> wr.catalog.sanitize_table_name('MyNewTable')
'mynewtable'
```

## awswrangler.catalog.search\_tables

`awswrangler.catalog.search_tables(text: str, catalog_id: str | None = None, boto3_session: Session | None = None) → Iterator[Dict[str, Any]]`

Get Pandas DataFrame of tables filtered by a search string.

---

**Note:** Search feature is not supported for Governed tables.

---

### Parameters

- **text (str, optional)** – Select only tables with the given string in table's properties.
- **catalog\_id (str, optional)** – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Iterator of tables.

### Return type

Iterator[Dict[str, Any]]

## Examples

```
>>> import awswrangler as wr
>>> df_tables = wr.catalog.search_tables(text='my_property')
```

## awswrangler.catalog.table

`awswrangler.catalog.table(database: str, table: str, transaction_id: str | None = None, query_as_of_time: str | None = None, catalog_id: str | None = None, boto3_session: Session | None = None) → DataFrame`

Get table details as Pandas DataFrame.

---

**Note:** If reading from a governed table, pass only one of `transaction_id` or `query_as_of_time`.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- **database (str)** – Database name.
- **table (str)** – Table name.

- **transaction\_id** (*str, optional*) – The ID of the transaction (i.e. used with GOVERNED tables).
- **query\_as\_of\_time** (*str, optional*) – The time as of when to read the table contents. Must be a valid Unix epoch timestamp. Cannot be specified alongside transaction\_id.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Pandas DataFrame filled by formatted table information.

**Return type**

pandas.DataFrame

**Examples**

```
>>> import awswrangler as wr
>>> df_table = wr.catalog.table(database='default', table='my_table')
```

**awswrangler.catalog.tables**

`awswrangler.catalog.tables(limit: int = 100, catalog_id: str | None = None, database: str | None = None, transaction_id: str | None = None, search_text: str | None = None, name_contains: str | None = None, name_prefix: str | None = None, name_suffix: str | None = None, boto3_session: Session | None = None) → DataFrame`

Get a DataFrame with tables filtered by a search term, prefix, suffix.

---

**Note:** Search feature is not supported for Governed tables.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- catalog\_id
- database

Check out the [Global Configurations Tutorial](#) for details.

---

**Parameters**

- **limit** (*int, optional*) – Max number of tables to be returned.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **database** (*str, optional*) – Database name.
- **transaction\_id** (*str, optional*) – The ID of the transaction (i.e. used with GOVERNED tables).

- **search\_text** (*str, optional*) – Select only tables with the given string in table’s properties.
- **name\_contains** (*str, optional*) – Select by a specific string on table name
- **name\_prefix** (*str, optional*) – Select by a specific prefix on table name
- **name\_suffix** (*str, optional*) – Select by a specific suffix on table name
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

#### Returns

Pandas DataFrame filled by formatted table information.

#### Return type

pandas.DataFrame

### Examples

```
>>> import awswrangler as wr
>>> df_tables = wr.catalog.tables()
```

## awswrangler.catalog.upsert\_table\_parameters

```
awswrangler.catalog.upsert_table_parameters(parameters: Dict[str, str], database: str, table: str,
                                             transaction_id: str | None = None, catalog_versioning:
                                             bool = False, catalog_id: str | None = None,
                                             boto3_session: Session | None = None) → Dict[str, str]
```

Insert or Update the received parameters.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

#### Parameters

- **parameters** (*Dict[str, str]*) – e.g. {“source”: “mysql”, “destination”: “datalake”}
- **database** (*str*) – Database name.
- **table** (*str*) – Table name.
- **transaction\_id** (*str, optional*) – The ID of the transaction (i.e. used with GOVERNED tables).
- **catalog\_versioning** (*bool*) – If True and *mode=“overwrite”*, creates an archived version of the table catalog before updating it.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.

- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

All parameters after the upsert.

**Return type**

`Dict[str, str]`

**Examples**

```
>>> import awswrangler as wr
>>> pars = wr.catalog.upsert_table_parameters(
...     parameters={"source": "mysql", "destination": "datalake"},
...     database="...",
...     table="...")
```

### 1.9.3 Amazon Athena

<code>create_athena_bucket([boto3_session])</code>	Create the default Athena bucket if it doesn't exist.
<code>create_ctas_table(sql[, database, ...])</code>	Create a new table populated with the results of a SELECT query.
<code>generate_create_query(table[, database, ...])</code>	Generate the query that created a table(EXTERNAL_TABLE) or a view(VIRTUAL_TABLE).
<code>get_query_columns_types(query_execution_id)</code>	Get the data type of all columns queried.
<code>get_query_execution(query_execution_id[, ...])</code>	Fetch query execution details.
<code>get_query_executions(query_execution_ids[, ...])</code>	From specified query execution IDs, return a DataFrame of query execution details.
<code>get_query_results()</code>	Get AWS Athena SQL query results as a Pandas DataFrame.
<code>get_named_query_statement(named_query_id[, ...])</code>	Get the named query statement string from a query ID.
<code>get_work_group(workgroup[, boto3_session])</code>	Return information about the workgroup with the specified name.
<code>list_query_executions([workgroup, boto3_session])</code>	Fetch list query execution IDs ran in specified workgroup or primary work group if not specified.
<code>read_sql_query()</code>	Execute any SQL query on AWS Athena and return the results as a Pandas DataFrame.
<code>read_sql_table()</code>	Extract the full table AWS Athena and return the results as a Pandas DataFrame.
<code>repair_table(table[, database, data_source, ...])</code>	Run the Hive's metastore consistency check: 'MSCK REPAIR TABLE table;'.
<code>start_query_execution()</code>	Start a SQL Query against AWS Athena.
<code>stop_query_execution(query_execution_id[, ...])</code>	Stop a query execution.
<code>unload(sql, path, database[, file_format, ...])</code>	Write query results from a SELECT statement to the specified data format using UNLOAD.
<code>wait_query(query_execution_id[, ...])</code>	Wait for the query end.

## awswrangler.athena.create\_athena\_bucket

`awswrangler.athena.create_athena_bucket(boto3_session: Session | None = None) → str`

Create the default Athena bucket if it doesn't exist.

### Parameters

`boto3_session(boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Bucket s3 path (E.g. s3://aws-athena-query-results-ACCOUNT-REGION/)

### Return type

str

## Examples

```
>>> import awswrangler as wr
>>> wr.athena.create_athena_bucket()
's3://aws-athena-query-results-ACCOUNT-REGION/'
```

## awswrangler.athena.create\_ctas\_table

`awswrangler.athena.create_ctas_table(sql: str, database: str | None = None, ctas_table: str | None = None, ctas_database: str | None = None, s3_output: str | None = None, storage_format: str | None = None, write_compression: str | None = None, partitioning_info: List[str] | None = None, bucketing_info: Tuple[List[str], int] | None = None, field_delimiter: str | None = None, schema_only: bool = False, workgroup: str | None = None, data_source: str | None = None, encryption: str | None = None, kms_key: str | None = None, categories: List[str] | None = None, wait: bool = False, athena_query_wait_polling_delay: float = 1.0, boto3_session: Session | None = None) → Dict[str, str | QueryMetadata]`

Create a new table populated with the results of a SELECT query.

<https://docs.aws.amazon.com/athena/latest/ug/create-table-as.html>

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `database`
- `athena_query_wait_polling_delay`
- `workgroup`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- `sql (str)` – SELECT SQL query.
- `database (Optional[str], optional)` – The name of the database where the original table is stored.

- **ctas\_table** (*Optional[str]*, *optional*) – The name of the CTAS table. If None, a name with a random string is used.
- **ctas\_database** (*Optional[str]*, *optional*) – The name of the alternative database where the CTAS table should be stored. If None, *database* is used, that is the CTAS table is stored in the same database as the original table.
- **s3\_output** (*Optional[str]*, *optional*) – The output Amazon S3 path. If None, either the Athena workgroup or client-side location setting is used. If a workgroup enforces a query results location, then it overrides this argument.
- **storage\_format** (*Optional[str]*, *optional*) – The storage format for the CTAS query results, such as ORC, PARQUET, AVRO, JSON, or TEXTFILE. PARQUET by default.
- **write\_compression** (*Optional[str]*, *optional*) – The compression type to use for any storage format that allows compression to be specified.
- **partitioning\_info** (*Optional[List[str]]*, *optional*) – A list of columns by which the CTAS table will be partitioned.
- **bucketing\_info** (*Optional[Tuple[List[str], int]]*, *optional*) – Tuple consisting of the column names used for bucketing as the first element and the number of buckets as the second element. Only *str*, *int* and *bool* are supported as column data types for bucketing.
- **field\_delimiter** (*Optional[str]*, *optional*) – The single-character field delimiter for files in CSV, TSV, and text files.
- **schema\_only** (*bool*, *optional*) – `_description_`, by default False
- **workgroup** (*Optional[str]*, *optional*) – Athena workgroup.
- **data\_source** (*Optional[str]*, *optional*) – Data Source / Catalog name. If None, ‘AwsDataCatalog’ is used.
- **encryption** (*str*, *optional*) – Valid values: [None, ‘SSE\_S3’, ‘SSE\_KMS’]. Note: ‘CSE\_KMS’ is not supported.
- **kms\_key** (*str*, *optional*) – For SSE-KMS, this is the KMS key ARN or ID.
- **categories** (*List[str]*, *optional*) – List of columns names that should be returned as pandas.Categorical. Recommended for memory restricted environments.
- **wait** (*bool*, *default False*) – Whether to wait for the query to finish and return a dictionary with the Query metadata.
- **athena\_query\_wait\_polling\_delay** (*float*, *default: 0.25 seconds*) – Interval in seconds for how often the function will check if the Athena query has completed.
- **boto3\_session** (*Optional[boto3.Session]*, *optional*) – Boto3 Session. The default boto3 session is used if *boto3\_session* is None.

**Returns**

A dictionary with the the CTAS database and table names. If *wait* is *False*, the query ID is included, otherwise a Query metadata object is added instead.

**Return type**

`Dict[str, Union[str, _QueryMetadata]]`

## Examples

Select all into a new table and encrypt the results

```
>>> import awswrangler as wr
>>> wr.athena.create_ctas_table(
...     sql="select * from table",
...     database="default",
...     encryption="SSE_KMS",
...     kms_key="1234abcd-12ab-34cd-56ef-1234567890ab",
... )
{'ctas_database': 'default', 'ctas_table': 'temp_table_5669340090094....', 'ctas_query_id': 'cc7dfa81-831d-...'}
```

Create a table with schema only

```
>>> wr.athena.create_ctas_table(
...     sql="select col1, col2 from table",
...     database="default",
...     ctas_table="my_ctas_table",
...     schema_only=True,
...     wait=True,
... )
```

Partition data and save to alternative CTAS database

```
>>> wr.athena.create_ctas_table(
...     sql="select * from table",
...     database="default",
...     ctas_database="my_ctas_db",
...     storage_format="avro",
...     write_compression="snappy",
...     partitioning_info=["par0", "par1"],
...     wait=True,
... )
```

## awswrangler.athena.generate\_create\_query

```
awswrangler.athena.generate_create_query(table: str, database: str | None = None, transaction_id: str | None = None, query_as_of_time: str | None = None, catalog_id: str | None = None, boto3_session: Session | None = None) → str
```

Generate the query that created a table(EXTERNAL\_TABLE) or a view(VIRTUAL\_TABLE).

Analyzes an existing table named table\_name to generate the query that created it.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

**Parameters**

- **table** (*str*) – Table name.
- **database** (*str*) – Database name.
- **transaction\_id** (*str, optional*) – The ID of the transaction.
- **query\_as\_of\_time** (*str, optional*) – The time as of when to read the table contents. Must be a valid Unix epoch timestamp. Cannot be specified alongside transaction\_id.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

The query that created the table or view.

**Return type**

*str*

**Examples**

```
>>> import awswrangler as wr
>>> view_create_query: str = wr.athena.generate_create_query(table='my_view', ↴
    database='default')
```

**awswrangler.athena.get\_query\_columns\_types**

`awswrangler.athena.get_query_columns_types(query_execution_id: str, boto3_session: Session | None = None) → Dict[str, str]`

Get the data type of all columns queried.

<https://docs.aws.amazon.com/athena/latest/ug/data-types.html>

**Parameters**

- **query\_execution\_id** (*str*) – Athena query execution ID.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. If none, the default boto3 session is used.

**Returns**

Dictionary with all data types.

**Return type**

`Dict[str, str]`

## Examples

```
>>> import awswrangler as wr
>>> wr.athena.get_query_columns_types('query-execution-id')
{'col0': 'int', 'col1': 'double'}
```

## awswrangler.athena.get\_query\_execution

awswrangler.athena.get\_query\_execution(*query\_execution\_id*: str, *boto3\_session*: Session | None = None)  
→ Dict[str, Any]

Fetch query execution details.

[https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/athena.html#Athena.Client.get\\_query\\_execution](https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/athena.html#Athena.Client.get_query_execution)

### Parameters

- **query\_execution\_id** (str) – Athena query execution ID.
- **boto3\_session** (boto3.Session(), optional) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Dictionary with the get\_query\_execution response.

### Return type

Dict[str, Any]

## Examples

```
>>> import awswrangler as wr
>>> res = wr.athena.get_query_execution(query_execution_id='query-execution-id')
```

## awswrangler.athena.get\_query\_executions

awswrangler.athena.get\_query\_executions(*query\_execution\_ids*: List[str], *return\_unprocessed*: bool = False, *boto3\_session*: Session | None = None) → Tuple[DataFrame, DataFrame] | DataFrame

From specified query execution IDs, return a DataFrame of query execution details.

[https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/athena.html#Athena.Client.batch\\_get\\_query\\_execution](https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/athena.html#Athena.Client.batch_get_query_execution)

### Parameters

- **query\_execution\_ids** (List[str]) – Athena query execution IDs.
- **return\_unprocessed** (bool.) – True to also return query executions id that are unable to be processed. False to only return DataFrame of query execution details. Default is False
- **boto3\_session** (boto3.Session(), optional) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

- *DataFrame* – DataFrame contain information about query execution details.

- *DataFrame* – DataFrame contain information about unprocessed query execution ids.

## Examples

```
>>> import awswrangler as wr
>>> query_executions_df, unprocessed_query_executions_df = wr.athena.get_query_
   ↪executions(
      query_execution_ids=['query-execution-id','query-execution-id1']
   )
```

### `awswrangler.athena.get_query_results`

`awswrangler.athena.get_query_results(query_execution_id: str, use_threads: bool | int = True, boto3_session: boto3.Session | None = None, categories: List[str] | None = None, chunksize: None | Literal[False] = None, s3_additional_kwargs: Dict[str, Any] | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → DataFrame`

`awswrangler.athena.get_query_results(query_execution_id: str, *, use_threads: bool | int = True, boto3_session: boto3.Session | None = None, categories: List[str] | None = None, chunksize: Literal[True], s3_additional_kwargs: Dict[str, Any] | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → Iterator[pd.DataFrame]`

`awswrangler.athena.get_query_results(query_execution_id: str, *, use_threads: bool | int = True, boto3_session: boto3.Session | None = None, categories: List[str] | None = None, chunksize: bool, s3_additional_kwargs: Dict[str, Any] | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → pd.DataFrame | Iterator[pd.DataFrame]`

`awswrangler.athena.get_query_results(query_execution_id: str, *, use_threads: bool | int = True, boto3_session: boto3.Session | None = None, categories: List[str] | None = None, chunksize: int, s3_additional_kwargs: Dict[str, Any] | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → Iterator[pd.DataFrame]`

Get AWS Athena SQL query results as a Pandas DataFrame.

---

**Note:** Following arguments are not supported in distributed mode with engine *EngineEnum.RAY*:

- `boto3_session`
- 

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `athena_query_wait_polling_delay`
- `chunksize`

Check out the [Global Configurations Tutorial](#) for details.

---

## Parameters

- **query\_execution\_id** (*str*) – SQL query’s execution\_id on AWS Athena.
- **use\_threads** (*bool, int*) – True to enable concurrent requests, False to disable multiple threads. If enabled os.cpu\_count() will be used as the max number of threads. If integer is provided, specified number is used.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **categories** (*List[str]*, *optional*) – List of columns names that should be returned as pandas.Categorical. Recommended for memory restricted environments.
- **chunksize** (*Union[int, bool]*, *optional*) – If passed will split the data in a Iterable of DataFrames (Memory friendly). If *True* awswrangler iterates on the data by files in the most efficient way without guarantee of chunksize. If an *INTEGER* is passed awswrangler will iterate on the data by number of rows equal the received *INTEGER*.
- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to botocore requests. e.g. s3\_additional\_kwargs={‘RequestPayer’: ‘requester’}
- **pyarrow\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to *to\_pandas* method converting from PyArrow tables to Pandas DataFrame. Valid values include “split\_blocks”, “self\_destruct”, “ignore\_metadata”. e.g. pyarrow\_additional\_kwargs={‘split\_blocks’: True}.
- **athena\_query\_wait\_polling\_delay** (*float, default: 0.25 seconds*) – Interval in seconds for how often the function will check if the Athena query has completed.

#### Returns

Pandas DataFrame or Generator of Pandas DataFrames if chunksize is passed.

#### Return type

*Union[pd.DataFrame, Iterator[pd.DataFrame]]*

### Examples

```
>>> import awswrangler as wr
>>> res = wr.athena.get_query_results(
...     query_execution_id="cbae5b41-8103-4709-95bb-887f88edd4f2"
... )
```

### awswrangler.athena.get\_named\_query\_statement

`awswrangler.athena.get_named_query_statement(named_query_id: str, boto3_session: Session | None = None) → str`

Get the named query statement string from a query ID.

#### Parameters

- **named\_query\_id** (*str*) – The unique ID of the query. Used to get the query statement from a saved query. Requires access to the workgroup where the query is saved.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. If none, the default boto3 session is used.

#### Returns

The named query statement string

**Return type**

str

**awswrangler.athena.get\_work\_group**

`awswrangler.athena.get_work_group(workgroup: str, boto3_session: Session | None = None) → Dict[str, Any]`

Return information about the workgroup with the specified name.

**Parameters**

- **workgroup** (`str`) – Work Group name.
- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

[https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/athena.html#Athena.Client.get\\_work\\_group](https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/athena.html#Athena.Client.get_work_group)

**Return type**

Dict[str, Any]

**Examples**

```
>>> import awswrangler as wr
>>> res = wr.athena.get_work_group(workgroup='workgroup_name')
```

**awswrangler.athena.list\_query\_executions**

`awswrangler.athena.list_query_executions(workgroup: str | None = None, boto3_session: Session | None = None) → List[str]`

Fetch list query execution IDs ran in specified workgroup or primary work group if not specified.

[https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/athena.html#Athena.Client.list\\_query\\_executions](https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/athena.html#Athena.Client.list_query_executions)

**Parameters**

- **workgroup** (`str`) – The name of the workgroup from which the query\_id are being returned. If not specified, a list of available query execution IDs for the queries in the primary workgroup is returned.
- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

List of query execution IDs.

**Return type**

List[str]

## Examples

```
>>> import awswrangler as wr
>>> res = wr.athena.list_query_executions(workgroup='workgroup-name')
```

### awswrangler.athena.read\_sql\_query

```
awswrangler.athena.read_sql_query(sql: str, database: str, ctas_approach: bool = True, unload_approach:
    bool = False, ctas_parameters: AthenaCTASSettings | None = None,
    unload_parameters: AthenaUNLOADSettings | None = None,
    categories: List[str] | None = None, chunksize: None | Literal[False] =
    None, s3_output: str | None = None, workgroup: str | None = None,
    encryption: str | None = None, kms_key: str | None = None, keep_files:
    bool = True, use_threads: bool | int = True, boto3_session:
    boto3.Session | None = None, athena_cache_settings:
    AthenaCacheSettings | None = None, data_source: str | None = None,
    athena_query_wait_polling_delay: float = 1.0, params: Dict[str, Any] |
    None = None, s3_additional_kwargs: Dict[str, Any] | None = None,
    pyarrow_additional_kwargs: Dict[str, Any] | None = None) →
    DataFrame

awswrangler.athena.read_sql_query(sql: str, database: str, *, ctas_approach: bool = True,
    unload_approach: bool = False, ctas_parameters: AthenaCTASSettings |
    None = None, unload_parameters: AthenaUNLOADSettings | None =
    None, categories: List[str] | None = None, chunksize: Literal[True],
    s3_output: str | None = None, workgroup: str | None = None,
    encryption: str | None = None, kms_key: str | None = None, keep_files:
    bool = True, use_threads: bool | int = True, boto3_session:
    boto3.Session | None = None, athena_cache_settings:
    AthenaCacheSettings | None = None, data_source: str | None = None,
    athena_query_wait_polling_delay: float = 1.0, params: Dict[str, Any] |
    None = None, s3_additional_kwargs: Dict[str, Any] | None = None,
    pyarrow_additional_kwargs: Dict[str, Any] | None = None) →
    Iterator[pd.DataFrame]

awswrangler.athena.read_sql_query(sql: str, database: str, *, ctas_approach: bool = True,
    unload_approach: bool = False, ctas_parameters: AthenaCTASSettings |
    None = None, unload_parameters: AthenaUNLOADSettings | None =
    None, categories: List[str] | None = None, chunksize: bool, s3_output:
    str | None = None, workgroup: str | None = None, encryption: str | None
    = None, kms_key: str | None = None, keep_files: bool = True,
    use_threads: bool | int = True, boto3_session: boto3.Session | None =
    None, athena_cache_settings: AthenaCacheSettings | None = None,
    data_source: str | None = None, athena_query_wait_polling_delay:
    float = 1.0, params: Dict[str, Any] | None = None,
    s3_additional_kwargs: Dict[str, Any] | None = None,
    pyarrow_additional_kwargs: Dict[str, Any] | None = None) →
    pd.DataFrame | Iterator[pd.DataFrame]
```

```

awswrangler.athena.read_sql_query(sql: str, database: str, *, ctas_approach: bool = True,
                                    unload_approach: bool = False, ctas_parameters: AthenaCTASSettings
                                    | None = None, unload_parameters: AthenaUNLOADSettings | None =
                                    None, categories: List[str] | None = None, chunksize: int, s3_output: str
                                    | None = None, workgroup: str | None = None, encryption: str | None =
                                    None, kms_key: str | None = None, keep_files: bool = True, use_threads:
                                    bool | int = True, boto3_session: boto3.Session | None = None,
                                    athena_cache_settings: AthenaCacheSettings | None = None,
                                    data_source: str | None = None, athena_query_wait_polling_delay:
                                    float = 1.0, params: Dict[str, Any] | None = None,
                                    s3_additional_kwargs: Dict[str, Any] | None = None,
                                    pyarrow_additional_kwargs: Dict[str, Any] | None = None) →
                                    Iterator[pd.DataFrame]

awswrangler.athena.read_sql_query(sql: str, database: str, *, ctas_approach: bool = True,
                                    unload_approach: bool = False, ctas_parameters: AthenaCTASSettings
                                    | None = None, unload_parameters: AthenaUNLOADSettings | None =
                                    None, categories: List[str] | None = None, chunksize: int | bool | None,
                                    s3_output: str | None = None, workgroup: str | None = None,
                                    encryption: str | None = None, kms_key: str | None = None, keep_files:
                                    bool = True, use_threads: bool | int = True, boto3_session:
                                    boto3.Session | None = None, athena_cache_settings:
                                    AthenaCacheSettings | None = None, data_source: str | None = None,
                                    athena_query_wait_polling_delay: float = 1.0, params: Dict[str, Any] |
                                    None = None, s3_additional_kwargs: Dict[str, Any] | None = None,
                                    pyarrow_additional_kwargs: Dict[str, Any] | None = None) →
                                    pd.DataFrame | Iterator[pd.DataFrame]

```

Execute any SQL query on AWS Athena and return the results as a Pandas DataFrame.

#### **Related tutorial:**

- [Amazon Athena](#)
- [Athena Cache](#)
- [Global Configurations](#)

#### **There are three approaches available through `ctas_approach` and `unload_approach` parameters:**

##### **1 - `ctas_approach=True` (Default):**

Wrap the query with a CTAS and then reads the table data as parquet directly from s3.

##### **PROS:**

- Faster for mid and big result sizes.
- Can handle some level of nested types.

##### **CONS:**

- Requires create/delete table permissions on Glue.
- Does not support timestamp with time zone
- Does not support columns with repeated names.
- Does not support columns with undefined data types.
- A temporary table will be created and then deleted immediately.
- Does not support custom data\_source/catalog\_id.

**2 - unload\_approach=True and ctas\_approach=False:**

Does an UNLOAD query on Athena and parse the Parquet result on s3.

PROS:

- Faster for mid and big result sizes.
- Can handle some level of nested types.
- Does not modify Glue Data Catalog

CONS:

- Output S3 path must be empty.
- Does not support timestamp with time zone.
- Does not support columns with repeated names.
- Does not support columns with undefined data types.

**3 - ctas\_approach=False:**

Does a regular query on Athena and parse the regular CSV result on s3.

PROS:

- Faster for small result sizes (less latency).
- Does not require create/delete table permissions on Glue
- Supports timestamp with time zone.
- Support custom data\_source/catalog\_id.

CONS:

- Slower for big results (But still faster than other libraries that uses the regular Athena's API)
- Does not handle nested types at all.

---

**Note:** The resulting DataFrame (or every DataFrame in the returned Iterator for chunked queries) have a `query_metadata` attribute, which brings the query result metadata returned by [Boto3/Athena](#).

For a practical example check out the [related tutorial!](#)

---

---

**Note:** Valid encryption modes: [None, 'SSE\_S3', 'SSE\_KMS'].

*P.S. 'CSE\_KMS' is not supported.*

---

---

**Note:** Create the default Athena bucket if it doesn't exist and `s3_output` is None.

(E.g. `s3://aws-athena-query-results-ACCOUNT-REGION/`)

---

---

**Note:** `chunksize` argument (Memory Friendly) (i.e batching):

Return an Iterable of DataFrames instead of a regular DataFrame.

There are two batching strategies:

- If **chunksize=True**, depending on the size of the data, one or more data frames are returned per file in the query result. Unlike **chunksize=INTEGER**, rows from different files are not mixed in the resulting data frames.
- If **chunksize=INTEGER**, awswrangler iterates on the data by number of rows equal to the received INTEGER.

*P.S.* `chunksize=True` is faster and uses less memory while `chunksize=INTEGER` is more precise in number of rows for each data frame.

*P.P.S.* If `ctas_approach=False` and `chunksize=True`, you will always receive an iterator with a single DataFrame because regular Athena queries only produces a single output file.

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
  - `s3_additional_kwargs`
- 

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `ctas_approach`
- `database`
- `athena_cache_settings`
- `athena_query_wait_polling_delay`
- `workgroup`
- `chunksize`

Check out the [Global Configurations Tutorial](#) for details.

---

## Parameters

- **sql (str)** – SQL query.
- **database (str)** – AWS Glue/Athena database name - It is only the origin database from where the query will be launched. You can still using and mixing several databases writing the full table name within the sql (e.g. `database.table`).
- **ctas\_approach (bool)** – Wraps the query using a CTAS, and read the resulted parquet data on S3. If false, read the regular CSV on S3.
- **unload\_approach (bool)** – Wraps the query using UNLOAD, and read the results from S3. Only PARQUET format is supported.
- **ctas\_parameters (AthenaCTASSettings, optional)** – Parameters of the CTAS such as database, temp\_table\_name, bucketing\_info, and compression.

- **unload\_parameters** ([AthenaUNLOADSettings](#), *optional*) – Parameters of the UNLOAD such as format, compression, field\_delimiter, and partitioned\_by.
- **categories** (*List[str]*, *optional*) – List of columns names that should be returned as pandas.Categorical. Recommended for memory restricted environments.
- **chunksize** (*Union[int, bool]*, *optional*) – If passed will split the data in a Iterable of DataFrames (Memory friendly). If *True* awswrangler iterates on the data by files in the most efficient way without guarantee of chunksize. If an *INTEGER* is passed awswrangler will iterate on the data by number of rows equal the received *INTEGER*.
- **s3\_output** (*str*, *optional*) – Amazon S3 path.
- **workgroup** (*str*, *optional*) – Athena workgroup.
- **encryption** (*str*, *optional*) – Valid values: [None, ‘SSE\_S3’, ‘SSE\_KMS’]. Notice: ‘CSE\_KMS’ is not supported.
- **kms\_key** (*str*, *optional*) – For SSE-KMS, this is the KMS key ARN or ID.
- **keep\_files** (*bool*) – Whether staging files produced by Athena are retained. ‘True’ by default.
- **use\_threads** (*bool, int*) – True to enable concurrent requests, False to disable multiple threads. If enabled os.cpu\_count() will be used as the max number of threads. If integer is provided, specified number is used.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **athena\_cache\_settings** ([AthenaCacheSettings](#), *optional*) – Parameters of the Athena cache settings such as max\_cache\_seconds, max\_cache\_query\_inspections, max\_remote\_cache\_entries, and max\_local\_cache\_entries. *AthenaCacheSettings* is a *TypedDict*, meaning the passed parameter can be instantiated either as an instance of *AthenaCacheSettings* or as a regular Python dict. If cached results are valid, awswrangler ignores the *ctas\_approach*, *s3\_output*, *encryption*, *kms\_key*, *keep\_files* and *ctas\_temp\_table\_name* params. If reading cached data fails for any reason, execution falls back to the usual query run path.
- **data\_source** (*str*, *optional*) – Data Source / Catalog name. If None, ‘AwsDataCatalog’ will be used by default.
- **athena\_query\_wait\_polling\_delay** (*float*, *default: 0.25 seconds*) – Interval in seconds for how often the function will check if the Athena query has completed.
- **params** (*Dict[str, any]*, *optional*) – Dict of parameters that will be used for constructing the SQL query. Only named parameters are supported. The dict needs to contain the information in the form {‘name’: ‘value’} and the SQL query needs to contain *:name*. Note that for varchar columns and similar, you must surround the value in single quotes.
- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to botocore requests. e.g. *s3\_additional\_kwargs*={‘RequestPayer’: ‘requester’}
- **pyarrow\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to *to\_pandas* method converting from PyArrow tables to Pandas DataFrame. Valid values include “split\_blocks”, “self\_destruct”, “ignore\_metadata”. e.g. *pyarrow\_additional\_kwargs*={‘split\_blocks’: True}.

#### Returns

Pandas DataFrame or Generator of Pandas DataFrames if chunksize is passed.

**Return type**

Union[pd.DataFrame, Iterator[pd.DataFrame]]

**Examples**

```
>>> import awswrangler as wr
>>> df = wr.athena.read_sql_query(sql="...", database="...")
>>> scanned_bytes = df.query_metadata["Statistics"]["DataScannedInBytes"]
```

```
>>> import awswrangler as wr
>>> df = wr.athena.read_sql_query(
...     sql="SELECT * FROM my_table WHERE name=:name AND city=:city",
...     params={"name": "filtered_name", "city": "filtered_city"}
... )
```

```
>>> import awswrangler as wr
>>> df = wr.athena.read_sql_query(
...     sql="...",
...     database="...",
...     athena_cache_settings={
...         "max_cache_seconds": 90,
...     },
... )
```

**awswrangler.athena.read\_sql\_table**

```
awswrangler.athena.read_sql_table(table: str, database: str, *, unload_approach: bool = False,
                                  unload_parameters: AthenaUNLOADSettings | None = None,
                                  ctas_approach: bool = True, ctas_parameters: AthenaCTASSettings | None = None,
                                  categories: List[str] | None = None, chunksize: None | Literal[False] = None,
                                  s3_output: str | None = None, workgroup: str | None = None,
                                  encryption: str | None = None, kms_key: str | None = None,
                                  keep_files: bool = True, use_threads: bool | int = True,
                                  boto3_session: boto3.Session | None = None, athena_cache_settings:
                                  AthenaCacheSettings | None = None, data_source: str | None = None,
                                  s3_additional_kwargs: Dict[str, Any] | None = None,
                                  pyarrow_additional_kwargs: Dict[str, Any] | None = None) →
                               DataFrame
```

```
awswrangler.athena.read_sql_table(table: str, database: str, *, unload_approach: bool = False,
                                  unload_parameters: AthenaUNLOADSettings | None = None,
                                  ctas_approach: bool = True, ctas_parameters: AthenaCTASSettings | None = None,
                                  categories: List[str] | None = None, chunksize:
                                  Literal[True], s3_output: str | None = None, workgroup: str | None =
                                  None, encryption: str | None = None, kms_key: str | None = None,
                                  keep_files: bool = True, use_threads: bool | int = True, boto3_session:
                                  boto3.Session | None = None, athena_cache_settings:
                                  AthenaCacheSettings | None = None, data_source: str | None = None,
                                  s3_additional_kwargs: Dict[str, Any] | None = None,
                                  pyarrow_additional_kwargs: Dict[str, Any] | None = None) →
                               Iterator[pd.DataFrame]
```

```
awswrangler.athena.read_sql_table(table: str, database: str, *, unload_approach: bool = False,  
                                  unload_parameters: AthenaUNLOADSettings | None = None,  
                                  ctas_approach: bool = True, ctas_parameters: AthenaCTASSettings |  
                                  None = None, categories: List[str] | None = None, chunksize: bool,  
                                  s3_output: str | None = None, workgroup: str | None = None,  
                                  encryption: str | None = None, kms_key: str | None = None, keep_files:  
                                  bool = True, use_threads: bool | int = True, boto3_session:  
                                  boto3.Session | None = None, athena_cache_settings:  
                                  AthenaCacheSettings | None = None, data_source: str | None = None,  
                                  s3_additional_kwargs: Dict[str, Any] | None = None,  
                                  pyarrow_additional_kwargs: Dict[str, Any] | None = None) →  
                                  pd.DataFrame | Iterator[pd.DataFrame]  
  
awswrangler.athena.read_sql_table(table: str, database: str, *, unload_approach: bool = False,  
                                  unload_parameters: AthenaUNLOADSettings | None = None,  
                                  ctas_approach: bool = True, ctas_parameters: AthenaCTASSettings |  
                                  None = None, categories: List[str] | None = None, chunksize: int,  
                                  s3_output: str | None = None, workgroup: str | None = None,  
                                  encryption: str | None = None, kms_key: str | None = None, keep_files:  
                                  bool = True, use_threads: bool | int = True, boto3_session:  
                                  boto3.Session | None = None, athena_cache_settings:  
                                  AthenaCacheSettings | None = None, data_source: str | None = None,  
                                  s3_additional_kwargs: Dict[str, Any] | None = None,  
                                  pyarrow_additional_kwargs: Dict[str, Any] | None = None) →  
                                  Iterator[pd.DataFrame]  
  
awswrangler.athena.read_sql_table(table: str, database: str, *, unload_approach: bool = False,  
                                  unload_parameters: AthenaUNLOADSettings | None = None,  
                                  ctas_approach: bool = True, ctas_parameters: AthenaCTASSettings |  
                                  None = None, categories: List[str] | None = None, chunksize: int | bool |  
                                  None, s3_output: str | None = None, workgroup: str | None = None,  
                                  encryption: str | None = None, kms_key: str | None = None, keep_files:  
                                  bool = True, use_threads: bool | int = True, boto3_session:  
                                  boto3.Session | None = None, athena_cache_settings:  
                                  AthenaCacheSettings | None = None, data_source: str | None = None,  
                                  s3_additional_kwargs: Dict[str, Any] | None = None,  
                                  pyarrow_additional_kwargs: Dict[str, Any] | None = None) →  
                                  pd.DataFrame | Iterator[pd.DataFrame]
```

Extract the full table AWS Athena and return the results as a Pandas DataFrame.

**Related tutorial:**

- [Amazon Athena](#)
- [Athena Cache](#)
- [Global Configurations](#)

**There are three approaches available through `ctas_approach` and `unload_approach` parameters:**

**1 - `ctas_approach=True` (Default):**

Wrap the query with a CTAS and then reads the table data as parquet directly from s3.

**PROS:**

- Faster for mid and big result sizes.
- Can handle some level of nested types.

**CONS:**

- Requires create/delete table permissions on Glue.
- Does not support timestamp with time zone
- Does not support columns with repeated names.
- Does not support columns with undefined data types.
- A temporary table will be created and then deleted immediately.
- Does not support custom data\_source/catalog\_id.

**2 - unload\_approach=True and ctas\_approach=False:**

Does an UNLOAD query on Athena and parse the Parquet result on s3.

PROS:

- Faster for mid and big result sizes.
- Can handle some level of nested types.
- Does not modify Glue Data Catalog

CONS:

- Output S3 path must be empty.
- Does not support timestamp with time zone.
- Does not support columns with repeated names.
- Does not support columns with undefined data types.

**3 - ctas\_approach=False:**

Does a regular query on Athena and parse the regular CSV result on s3.

PROS:

- Faster for small result sizes (less latency).
- Does not require create/delete table permissions on Glue
- Supports timestamp with time zone.
- Support custom data\_source/catalog\_id.

CONS:

- Slower for big results (But still faster than other libraries that uses the regular Athena's API)
- Does not handle nested types at all.

---

**Note:** The resulting DataFrame (or every DataFrame in the returned Iterator for chunked queries) have a `query_metadata` attribute, which brings the query result metadata returned by [Boto3/Athena](#).

For a practical example check out the [related tutorial!](#)

---

---

**Note:** Valid encryption modes: [None, 'SSE\_S3', 'SSE\_KMS'].

*P.S. 'CSE\_KMS' is not supported.*

---

---

**Note:** Create the default Athena bucket if it doesn't exist and s3\_output is None.

(E.g. s3://aws-athena-query-results-ACCOUNT-REGION/)

---

**Note:** *chunksize* argument (Memory Friendly) (i.e batching):

Return an Iterable of DataFrames instead of a regular DataFrame.

There are two batching strategies:

- If **chunksize=True**, depending on the size of the data, one or more data frames are returned per file in the query result. Unlike **chunksize=INTEGER**, rows from different files are not mixed in the resulting data frames.
- If **chunksize=INTEGER**, awswrangler iterates on the data by number of rows equal to the received INTEGER.

*P.S.* *chunksize=True* is faster and uses less memory while *chunksize=INTEGER* is more precise in number of rows for each data frame.

*P.P.S.* If *ctas\_approach=False* and *chunksize=True*, you will always receive an iterator with a single DataFrame because regular Athena queries only produces a single output file.

---

**Note:** In case of *use\_threads=True* the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

**Note:** Following arguments are not supported in distributed mode with engine *EngineEnum.RAY*:

- `boto3_session`
  - `s3_additional_kwargs`
- 

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `ctas_approach`
- `database`
- `athena_cache_settings`
- `workgroup`
- `chunksize`

Check out the [Global Configurations Tutorial](#) for details.

---

## Parameters

- **table (str)** – Table name.
- **database (str)** – AWS Glue/Athena database name.
- **ctas\_approach (bool)** – Wraps the query using a CTAS, and read the resulted parquet data on S3. If false, read the regular CSV on S3.
- **unload\_approach (bool)** – Wraps the query using UNLOAD, and read the results from S3. Only PARQUET format is supported.

- **ctas\_parameters** ([AthenaCTASSettings](#), *optional*) – Parameters of the CTAS such as database, temp\_table\_name, bucketing\_info, and compression.
- **unload\_parameters** ([AthenaUNLOADSettings](#), *optional*) – Parameters of the UNLOAD such as format, compression, field\_delimiter, and partitioned\_by.
- **categories** (*List[str]*, *optional*) – List of columns names that should be returned as pandas.Categorical. Recommended for memory restricted environments.
- **chunksize** (*Union[int, bool]*, *optional*) – If passed will split the data in a Iterable of DataFrames (Memory friendly). If *True* awswrangler iterates on the data by files in the most efficient way without guarantee of chunksize. If an *INTEGER* is passed awswrangler will iterate on the data by number of rows equal the received INTEGER.
- **s3\_output** (*str*, *optional*) – AWS S3 path.
- **workgroup** (*str*, *optional*) – Athena workgroup.
- **encryption** (*str*, *optional*) – Valid values: [None, ‘SSE\_S3’, ‘SSE\_KMS’]. Notice: ‘CSE\_KMS’ is not supported.
- **kms\_key** (*str*, *optional*) – For SSE-KMS, this is the KMS key ARN or ID.
- **keep\_files** (*bool*) – Should awswrangler delete or keep the staging files produced by Athena?
- **use\_threads** (*bool, int*) – True to enable concurrent requests, False to disable multiple threads. If enabled os.cpu\_count() will be used as the max number of threads. If integer is provided, specified number is used.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **athena\_cache\_settings** ([AthenaCacheSettings](#), *optional*) – Parameters of the Athena cache settings such as max\_cache\_seconds, max\_cache\_query\_inspections, max\_remote\_cache\_entries, and max\_local\_cache\_entries. *AthenaCacheSettings* is a *TypedDict*, meaning the passed parameter can be instantiated either as an instance of *AthenaCacheSettings* or as a regular Python dict. If cached results are valid, awswrangler ignores the *ctas\_approach*, *s3\_output*, *encryption*, *kms\_key*, *keep\_files* and *ctas\_temp\_table\_name* params. If reading cached data fails for any reason, execution falls back to the usual query run path.
- **data\_source** (*str*, *optional*) – Data Source / Catalog name. If None, ‘AwsDataCatalog’ will be used by default.
- **s3\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to botocore requests. e.g. `s3_additional_kwargs={‘RequestPayer’: ‘requester’}`
- **pyarrow\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to *to\_pandas* method converting from PyArrow tables to Pandas DataFrame. Valid values include “split\_blocks”, “self\_destruct”, “ignore\_metadata”. e.g. `pyarrow_additional_kwargs={‘split_blocks’: True}`.

### Returns

Pandas DataFrame or Generator of Pandas DataFrames if chunksize is passed.

### Return type

`Union[pd.DataFrame, Iterator[pd.DataFrame]]`

## Examples

```
>>> import awswrangler as wr
>>> df = wr.athena.read_sql_table(table="...", database="...")
>>> scanned_bytes = df.query_metadata["Statistics"]["DataScannedInBytes"]
```

### awswrangler.athena.repair\_table

```
awswrangler.athena.repair_table(table: str, database: str | None = None, data_source: str | None = None,
                                  s3_output: str | None = None, workgroup: str | None = None, encryption:
                                  str | None = None, kms_key: str | None = None,
                                  athena_query_wait_polling_delay: float = 1.0, boto3_session: Session | None = None) → str
```

Run the Hive's metastore consistency check: ‘MSCK REPAIR TABLE table;’.

Recovers partitions and data associated with partitions. Use this statement when you add partitions to the catalog. It is possible it will take some time to add all partitions. If this operation times out, it will be in an incomplete state where only a few partitions are added to the catalog.

---

**Note:** Create the default Athena bucket if it doesn't exist and s3\_output is None. (E.g. s3://aws-athena-query-results-ACCOUNT-REGION/)

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `database`
- `athena_query_wait_polling_delay`
- `workgroup`

Check out the [Global Configurations Tutorial](#) for details.

---

## Parameters

- **table (str)** – Table name.
- **database (str, optional)** – AWS Glue/Athena database name.
- **data\_source (Optional[str], optional)** – Data Source / Catalog name. If None, ‘AwsDataCatalog’ is used.
- **s3\_output (str, optional)** – AWS S3 path.
- **workgroup (str, optional)** – Athena workgroup.
- **encryption (str, optional)** – None, ‘SSE\_S3’, ‘SSE\_KMS’, ‘CSE\_KMS’.
- **kms\_key (str, optional)** – For SSE-KMS and CSE-KMS , this is the KMS key ARN or ID.
- **athena\_query\_wait\_polling\_delay (float, default: 0.25 seconds)** – Interval in seconds for how often the function will check if the Athena query has completed.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Query final state ('SUCCEEDED', 'FAILED', 'CANCELLED').

**Return type**

str

**Examples**

```
>>> import awswrangler as wr
>>> query_final_state = wr.athena.repair_table(table='...', database='...')
```

**awswrangler.athena.start\_query\_execution**

```
awswrangler.athena.start_query_execution(sql: str, database: str | None = None, s3_output: str | None = None, workgroup: str | None = None, encryption: str | none = None, kms_key: str | none = None, params: Dict[str, Any] | None = None, boto3_session: boto3.Session | None = None, athena_cache_settings: AthenaCacheSettings | None = None, athena_query_wait_polling_delay: float = 1.0, data_source: str | None = None, wait: Literal[False] = False) → str

awswrangler.athena.start_query_execution(sql: str, *, database: str | None = None, s3_output: str | None = None, workgroup: str | None = None, encryption: str | none = None, kms_key: str | none = None, params: Dict[str, Any] | None = None, boto3_session: boto3.Session | None = None, athena_cache_settings: AthenaCacheSettings | None = None, athena_query_wait_polling_delay: float = 1.0, data_source: str | None = None, wait: Literal[True]) → Dict[str, Any]

awswrangler.athena.start_query_execution(sql: str, *, database: str | None = None, s3_output: str | None = None, workgroup: str | None = None, encryption: str | none = None, kms_key: str | none = None, params: Dict[str, Any] | None = None, boto3_session: boto3.Session | None = None, athena_cache_settings: AthenaCacheSettings | None = None, athena_query_wait_polling_delay: float = 1.0, data_source: str | None = None, wait: bool) → str | Dict[str, Any]
```

Start a SQL Query against AWS Athena.

---

**Note:** Create the default Athena bucket if it doesn't exist and s3\_output is None. (E.g. s3://aws-athena-query-results-ACCOUNT-REGION/)

---



---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- database
- athena\_cache\_settings
- athena\_query\_wait\_polling\_delay
- workgroup

Check out the [Global Configurations Tutorial](#) for details.

---

## Parameters

- **sql** (*str*) – SQL query.
- **database** (*str, optional*) – AWS Glue/Athena database name.
- **s3\_output** (*str, optional*) – AWS S3 path.
- **workgroup** (*str, optional*) – Athena workgroup.
- **encryption** (*str, optional*) – None, ‘SSE\_S3’, ‘SSE\_KMS’, ‘CSE\_KMS’.
- **kms\_key** (*str, optional*) – For SSE-KMS and CSE-KMS , this is the KMS key ARN or ID.
- **params** (*Dict[str, any], optional*) – Dict of parameters that will be used for constructing the SQL query. Only named parameters are supported. The dict needs to contain the information in the form {‘name’: ‘value’} and the SQL query needs to contain :*name*. Note that for varchar columns and similar, you must surround the value in single quotes.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **athena\_cache\_settings** (*AthenaCacheSettings, optional*) – Parameters of the Athena cache settings such as max\_cache\_seconds, max\_cache\_query\_inspections, max\_remote\_cache\_entries, and max\_local\_cache\_entries. AthenaCacheSettings is a *TypedDict*, meaning the passed parameter can be instantiated either as an instance of AthenaCacheSettings or as a regular Python dict. If cached results are valid, awswrangler ignores the *ctas\_approach*, *s3\_output*, *encryption*, *kms\_key*, *keep\_files* and *ctas\_temp\_table\_name* params. If reading cached data fails for any reason, execution falls back to the usual query run path.
- **athena\_query\_wait\_polling\_delay** (*float, default: 0.25 seconds*) – Interval in seconds for how often the function will check if the Athena query has completed.
- **data\_source** (*str, optional*) – Data Source / Catalog name. If None, ‘AwsDataCatalog’ will be used by default.
- **wait** (*bool, default False*) – Indicates whether to wait for the query to finish and return a dictionary with the query execution response.

## Returns

Query execution ID if *wait* is set to *False*, dictionary with the get\_query\_execution response otherwise.

## Return type

Union[*str*, *Dict*[*str*, *Any*]]

## Examples

Querying into the default data source (Amazon s3 - ‘AwsDataCatalog’)

```
>>> import awswrangler as wr
>>> query_exec_id = wr.athena.start_query_execution(sql='...', database='...')
```

Querying into another data source (PostgreSQL, Redshift, etc)

```
>>> import awswrangler as wr
>>> query_exec_id = wr.athena.start_query_execution(sql='...', database='...', data_
->source='...')
```

## awswrangler.athena.stop\_query\_execution

```
awswrangler.athena.stop_query_execution(query_execution_id: str, boto3_session: Session | None = None) → None
```

Stop a query execution.

Requires you to have access to the workgroup in which the query ran.

### Parameters

- **query\_execution\_id** (*str*) – Athena query execution ID.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

*None*.

### Return type

*None*

## Examples

```
>>> import awswrangler as wr
>>> wr.athena.stop_query_execution(query_execution_id='query-execution-id')
```

## awswrangler.athena.unload

```
awswrangler.athena.unload(sql: str, path: str, database: str, file_format: str = 'PARQUET', compression: str | None = None, field_delimiter: str | None = None, partitioned_by: List[str] | None = None, workgroup: str | None = None, encryption: str | None = None, kms_key: str | None = None, boto3_session: Session | None = None, data_source: str | None = None, params: Dict[str, Any] | None = None, athena_query_wait_polling_delay: float = 1.0) → _QueryMetadata
```

Write query results from a SELECT statement to the specified data format using UNLOAD.

<https://docs.aws.amazon.com/athena/latest/ug/unload.html>

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `database`
- `athena_query_wait_polling_delay`
- `workgroup`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- **sql** (*str*) – SQL query.
- **path** (*str, optional*) – Amazon S3 path.

- **database** (*str*) – AWS Glue/Athena database name - It is only the origin database from where the query will be launched. You can still using and mixing several databases writing the full table name within the sql (e.g. *database.table*).
- **file\_format** (*str*) – File format of the output. Possible values are ORC, PARQUET, AVRO, JSON, or TEXTFILE
- **compression** (*Optional[str]*) – This option is specific to the ORC and Parquet formats. For ORC, possible values are lz4, snappy, zlib, or zstd. For Parquet, possible values are gzip or snappy. For ORC, the default is zlib, and for Parquet, the default is gzip.
- **field\_delimiter** (*str*) – A single-character field delimiter for files in CSV, TSV, and other text formats.
- **partitioned\_by** (*Optional[List[str]]*) – An array list of columns by which the output is partitioned.
- **workgroup** (*str, optional*) – Athena workgroup.
- **encryption** (*str, optional*) – Valid values: [None, ‘SSE\_S3’, ‘SSE\_KMS’]. Notice: ‘CSE\_KMS’ is not supported.
- **kms\_key** (*str, optional*) – For SSE-KMS, this is the KMS key ARN or ID.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **data\_source** (*str, optional*) – Data Source / Catalog name. If None, ‘AwsDataCatalog’ will be used by default.
- **params** (*Dict[str, any], optional*) – Dict of parameters that will be used for constructing the SQL query. Only named parameters are supported. The dict needs to contain the information in the form {‘name’: ‘value’} and the SQL query needs to contain *:name*. Note that for varchar columns and similar, you must surround the value in single quotes.
- **athena\_query\_wait\_polling\_delay** (*float, default: 0.25 seconds*) – Interval in seconds for how often the function will check if the Athena query has completed.

**Returns**

Query metadata including query execution id, dtypes, manifest & output location.

**Return type**

\_QueryMetadata

**Examples**

```
>>> import awswrangler as wr
>>> res = wr.athena.unload(
...     sql="SELECT * FROM my_table WHERE name=:name AND city=:city",
...     params={"name": "filtered_name", "city": "filtered_city"}
... )
```

## awswrangler.athena.wait\_query

```
awswrangler.athena.wait_query(query_execution_id: str, boto3_session: Session | None = None,
                               athena_query_wait_polling_delay: float = 1.0) → Dict[str, Any]
```

Wait for the query end.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `athena_query_wait_polling_delay`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- `query_execution_id (str)` – Athena query execution ID.
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.
- `athena_query_wait_polling_delay (float, default: 0.25 seconds)` – Interval in seconds for how often the function will check if the Athena query has completed.

### Returns

Dictionary with the `get_query_execution` response.

### Return type

`Dict[str, Any]`

## Examples

```
>>> import awswrangler as wr
>>> res = wr.athena.wait_query(query_execution_id='query-execution-id')
```

## 1.9.4 AWS Lake Formation

<code>read_sql_query(sql, database[, ...])</code>	Execute PartiQL query on AWS Glue Table (Transaction ID or time travel timestamp).
<code>read_sql_table(table, database[, ...])</code>	Extract all rows from AWS Glue Table (Transaction ID or time travel timestamp).
<code>cancel_transaction(transaction_id[, ...])</code>	Cancel the specified transaction.
<code>commit_transaction(transaction_id[, ...])</code>	Commit the specified transaction.
<code>describe_transaction(transaction_id[, ...])</code>	Return the status of a single transaction.
<code>extend_transaction(transaction_id[, ...])</code>	Indicate to the service that the specified transaction is still active and should not be canceled.
<code>start_transaction([read_only, time_out, ...])</code>	Start a new transaction and returns its transaction ID.
<code>wait_query(query_id[, boto3_session, ...])</code>	Wait for the query to end.

## awswrangler.lakeformation.read\_sql\_query

```
awswrangler.lakeformation.read_sql_query(sql: str, database: str, transaction_id: str | None = None,  
                                         query_as_of_time: str | None = None, catalog_id: str | None =  
                                         None, use_threads: bool = True, boto3_session: Session | None  
                                         = None, params: Dict[str, Any] | None = None,  
                                         pyarrow_additional_kwargs: Dict[str, Any] | None = None) →  
                                         DataFrame
```

Execute PartiQL query on AWS Glue Table (Transaction ID or time travel timestamp). Return Pandas DataFrame.

---

**Note:** ORDER BY operations are not honored. i.e. sql="SELECT \* FROM my\_table ORDER BY my\_column" is NOT valid

---

**Note:** The database must NOT be explicitly defined in the PartiQL statement. i.e. sql="SELECT \* FROM my\_table" is valid but sql="SELECT \* FROM my\_db.my\_table" is NOT valid

---

**Note:** Pass one of *transaction\_id* or *query\_as\_of\_time*, not both.

---

**Note:** Following arguments are not supported in distributed mode with engine *EngineEnum.RAY*:

- *boto3\_session*
- 

**Note:** This function has arguments which can be configured globally through *wr.config* or environment variables:

- *catalog\_id*
- *database*

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- **sql (str)** – partiQL query.
- **database (str)** – AWS Glue database name.
- **transaction\_id (str, optional)** – The ID of the transaction at which to read the table contents. Cannot be specified alongside *query\_as\_of\_time*.
- **query\_as\_of\_time (str, optional)** – The time as of when to read the table contents. Must be a valid Unix epoch timestamp. Cannot be specified alongside *transaction\_id*.
- **catalog\_id (str, optional)** – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **use\_threads (bool)** – True to enable concurrent requests, False to disable multiple threads. When enabled, `os.cpu_count()` is used as the max number of threads.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session is used if *boto3\_session* receives None.

- **params** (*Dict[str, Any]*, *optional*) – Dict of parameters used to format the partiQL query. Only named parameters are supported. The dict must contain the information in the form {"name": "value"} and the SQL query must contain :*name*.
- **pyarrow\_additional\_kwargs** (*Dict[str, Any]*, *optional*) – Forwarded to *to\_pandas* method converting from PyArrow tables to Pandas DataFrame. Valid values include "split\_blocks", "self\_destruct", "ignore\_metadata". e.g. `pyarrow_additional_kwargs={'split_blocks': True}`.

**Returns**

Pandas DataFrame.

**Return type**

pd.DataFrame

**Examples**

```
>>> import awswrangler as wr
>>> df = wr.lakeformation.read_sql_query(
...     sql="SELECT * FROM my_table;",
...     database="my_db",
...     catalog_id="111111111111"
... )
```

```
>>> import awswrangler as wr
>>> df = wr.lakeformation.read_sql_query(
...     sql="SELECT * FROM my_table LIMIT 10;",
...     database="my_db",
...     transaction_id=
...     "1b62811fa3e02c4e5fdbaa642b752030379c4a8a70da1f8732ce6ccca47afdc9"
... )
```

```
>>> import awswrangler as wr
>>> df = wr.lakeformation.read_sql_query(
...     sql="SELECT * FROM my_table WHERE name=:name AND city=:city",
...     database="my_db",
...     query_as_of_time="1611142914",
...     params={"name": "filtered_name", "city": "filtered_city"}
... )
```

**awswrangler.lakeformation.read\_sql\_table**

`awswrangler.lakeformation.read_sql_table(table: str, database: str, transaction_id: str | None = None, query_as_of_time: str | None = None, catalog_id: str | None = None, use_threads: bool = True, boto3_session: Session | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → DataFrame`

Extract all rows from AWS Glue Table (Transaction ID or time travel timestamp). Return Pandas DataFrame.

---

**Note:** ORDER BY operations are not honored. i.e. `sql="SELECT * FROM my_table ORDER BY my_column"` is NOT valid

---

---

**Note:** Pass one of *transaction\_id* or *query\_as\_of\_time*, not both.

---

---

**Note:** Following arguments are not supported in distributed mode with engine *EngineEnum.RAY*:

- boto3\_session
- 

---

**Note:** This function has arguments which can be configured globally through *wr.config* or environment variables:

- catalog\_id
- database

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- **table** (*str*) – AWS Glue table name.
- **database** (*str*) – AWS Glue database name.
- **transaction\_id** (*str, optional*) – The ID of the transaction at which to read the table contents. Cannot be specified alongside query\_as\_of\_time.
- **query\_as\_of\_time** (*str, optional*) – The time as of when to read the table contents. Must be a valid Unix epoch timestamp. Cannot be specified alongside transaction\_id.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog from which to retrieve Databases. If none is provided, the AWS account ID is used by default.
- **use\_threads** (*bool*) – True to enable concurrent requests, False to disable multiple threads. When enabled, os.cpu\_count() is used as the max number of threads.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session is used if boto3\_session receives None.
- **pyarrow\_additional\_kwargs** (*Dict[str, Any], optional*) – Forwarded to *to\_pandas* method converting from PyArrow tables to Pandas DataFrame. Valid values include “split\_blocks”, “self\_destruct”, “ignore\_metadata”. e.g. pyarrow\_additional\_kwargs={‘split\_blocks’: True}.

### Returns

Pandas DataFrame.

### Return type

pd.DataFrame

## Examples

```
>>> import awswrangler as wr
>>> df = wr.lakeformation.read_sql_table(
...     table="my_table",
...     database="my_db",
...     catalog_id="111111111111",
... )
```

```
>>> import awswrangler as wr
>>> df = wr.lakeformation.read_sql_table(
...     table="my_table",
...     database="my_db",
...     transaction_id=
...     "1b62811fa3e02c4e5fdbaa642b752030379c4a8a70da1f8732ce6ccca47afdc9",
... )
```

```
>>> import awswrangler as wr
>>> df = wr.lakeformation.read_sql_table(
...     table="my_table",
...     database="my_db",
...     query_as_of_time="1611142914",
...     use_threads=True,
... )
```

## awswrangler.lakeformation.cancel\_transaction

`awswrangler.lakeformation.cancel_transaction(transaction_id: str, boto3_session: Session | None = None) → None`

Cancel the specified transaction. Returns exception if the transaction was previously committed.

### Parameters

- **transaction\_id (str)** – The ID of the transaction.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session received None.

### Returns

None.

### Return type

None

## Examples

```
>>> import awswrangler as wr
>>> wr.lakeformation.cancel_transaction(transaction_id="...")
```

## awswrangler.lakeformation.commit\_transaction

awswrangler.lakeformation.**commit\_transaction**(*transaction\_id*: str, *boto3\_session*: Session | None = None) → None

Commit the specified transaction. Returns exception if the transaction was previously canceled.

### Parameters

- **transaction\_id** (str) – The ID of the transaction.
- **boto3\_session** (boto3.Session(), optional) – Boto3 Session. The default boto3 session will be used if boto3\_session received None.

### Returns

None.

### Return type

None

## Examples

```
>>> import awswrangler as wr
>>> wr.lakeformation.commit_transaction(transaction_id="...")
```

## awswrangler.lakeformation.describe\_transaction

awswrangler.lakeformation.**describe\_transaction**(*transaction\_id*: str, *boto3\_session*: Session | None = None) → str

Return the status of a single transaction.

### Parameters

- **transaction\_id** (str) – The ID of the transaction.
- **boto3\_session** (boto3.Session(), optional) – Boto3 Session. The default boto3 session will be used if boto3\_session received None.

### Returns

Transaction status (i.e. active|committed|aborted).

### Return type

str

## Examples

```
>>> import awswrangler as wr
>>> status = wr.lakeformation.describe_transaction(transaction_id="...")
```

### `awswrangler.lakeformation.extend_transaction`

`awswrangler.lakeformation.extend_transaction(transaction_id: str, boto3_session: Session | None = None) → None`

Indicate to the service that the specified transaction is still active and should not be canceled.

#### Parameters

- **transaction\_id** (*str*) – The ID of the transaction.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session received None.

#### Returns

None.

#### Return type

None

## Examples

```
>>> import awswrangler as wr
>>> wr.lakeformation.extend_transaction(transaction_id="...")
```

### `awswrangler.lakeformation.start_transaction`

`awswrangler.lakeformation.start_transaction(read_only: bool | None = False, time_out: float | None = inf, boto3_session: Session | None = None) → str`

Start a new transaction and returns its transaction ID.

The transaction is periodically extended until it's committed, canceled or the defined time-out is reached.

#### Parameters

- **read\_only** (*bool*, *optional*) – Indicates that that this transaction should be read only. Writes made using a read-only transaction ID will be rejected. Read-only transactions do not need to be committed.
- **time\_out** (*float*, *optional*) – Maximum duration over which a transaction is extended.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session received None.

#### Returns

An opaque identifier for the transaction.

#### Return type

str

## Examples

```
>>> import awswrangler as wr
>>> transaction_id = wr.lakeformation.start_transaction(read_only=False)
```

### awswrangler.lakeformation.wait\_query

```
awswrangler.lakeformation.wait_query(query_id: str, boto3_session: Session | None = None,
                                      lakeformation_query_wait_polling_delay: float = 2) → Dict[str,
                                         Any]
```

Wait for the query to end.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `lakeformation_query_wait_polling_delay`

Check out the [Global Configurations Tutorial](#) for details.

---

#### Parameters

- `query_id` (`str`) – Lake Formation query execution ID.
- `boto3_session` (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if `boto3_session` received None.
- `lakeformation_query_wait_polling_delay` (`float`, *default: 2 seconds*) – Interval in seconds for how often the function will check if the LakeFormation query has completed.

#### Returns

Dictionary with the `get_query_state` response.

#### Return type

`Dict[str, Any]`

## Examples

```
>>> import awswrangler as wr
>>> res = wr.lakeformation.wait_query(query_id='query-id')
```

## 1.9.5 Amazon Redshift

<code>connect</code> (connection, secret_id, catalog_id, ...])	Return a redshift_connector connection from a Glue Catalog or Secret Manager.
<code>connect_temp</code> (cluster_identifier, user[, ...])	Return a redshift_connector temporary connection (No password required).
<code>copy</code> (df, path, con, table, schema[, ...])	Load Pandas DataFrame as a Table on Amazon Redshift using parquet files on S3 as stage.
<code>copy_from_files</code> (path, con, table, schema[, ...])	Load Parquet files from S3 to a Table on Amazon Redshift (Through COPY command).
<code>read_sql_query()</code>	Return a DataFrame corresponding to the result set of the query string.
<code>read_sql_table()</code>	Return a DataFrame corresponding to the table.
<code>to_sql</code> (df, con, table, schema[, mode, ...])	Write records stored in a DataFrame into Redshift.
<code>unload</code> (sql, path, con[, iam_role, ...])	Load Pandas DataFrame from a Amazon Redshift query result using Parquet files on s3 as stage.
<code>unload_to_files</code> (sql, path, con[, iam_role, ...])	Unload Parquet files on s3 from a Redshift query result (Through the UNLOAD command).

### `awswrangler.redshift.connect`

```
awswrangler.redshift.connect(connection: str | None = None, secret_id: str | None = None, catalog_id: str | None = None, dbname: str | None = None, boto3_session: Session | None = None, ssl: bool = True, timeout: int | None = None, max_prepared_statements: int = 1000, tcp_keepalive: bool = True, **kwargs: Any) → redshift_connector.Connection
```

Return a redshift\_connector connection from a Glue Catalog or Secret Manager.

---

**Note:** You MUST pass a `connection` OR `secret_id`. Here is an example of the secret structure in Secrets Manager: { “host”：“my-host.us-east-1.redshift.amazonaws.com”, “username”：“test”, “password”：“test”, “engine”：“redshift”, “port”：“5439”, “dbname”：“mydb” }

---

<https://github.com/aws/amazon-redshift-python-driver>

#### Parameters

- **connection (str, optional)** – Glue Catalog Connection name.
- **secret\_id (Optional[str]):** – Specifies the secret containing the connection details that you want to retrieve. You can specify either the Amazon Resource Name (ARN) or the friendly name of the secret.
- **catalog\_id (str, optional)** – The ID of the Data Catalog. If none is provided, the AWS account ID is used by default.
- **dbname (str, optional)** – Optional database name to overwrite the stored one.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **ssl (bool)** – This governs SSL encryption for TCP/IP sockets. This parameter is forward to redshift\_connector. <https://github.com/aws/amazon-redshift-python-driver>

- **timeout** (*int, optional*) – This is the time in seconds before the connection to the server will time out. The default is None which means no timeout. This parameter is forward to redshift\_connector. <https://github.com/aws/amazon-redshift-python-driver>
- **max\_prepared\_statements** (*int*) – This parameter is forward to redshift\_connector. <https://github.com/aws/amazon-redshift-python-driver>
- **tcp\_keepalive** (*bool*) – If True then use TCP keepalive. The default is True. This parameter is forward to redshift\_connector. <https://github.com/aws/amazon-redshift-python-driver>
- **\*\*kwargs** (*Any*) – Forwarded to redshift\_connector.connect. e.g. `is_serverless=True, serverless_acct_id='...', serverless_work_group='...'`

**Returns**

redshift\_connector connection.

**Return type**

redshift\_connector.Connection

## Examples

Fetching Redshift connection from Glue Catalog

```
>>> import awswrangler as wr
>>> con = wr.redshift.connect("MY_GLUE_CONNECTION")
>>> with con.cursor() as cursor:
>>>     cursor.execute("SELECT 1")
>>>     print(cursor.fetchall())
>>> con.close()
```

Fetching Redshift connection from Secrets Manager

```
>>> import awswrangler as wr
>>> con = wr.redshift.connect(secret_id="MY_SECRET")
>>> with con.cursor() as cursor:
>>>     cursor.execute("SELECT 1")
>>>     print(cursor.fetchall())
>>> con.close()
```

## awswrangler.redshift.connect\_temp

`awswrangler.redshift.connect_temp(cluster_identifier: str, user: str, database: str | None = None, duration: int = 900, auto_create: bool = True, db_groups: List[str] | None = None, boto3_session: Session | None = None, ssl: bool = True, timeout: int | None = None, max_prepared_statements: int = 1000, tcp_keepalive: bool = True, **kwargs: Any) → redshift_connector.Connection`

Return a redshift\_connector temporary connection (No password required).

<https://github.com/aws/amazon-redshift-python-driver>

**Parameters**

- **cluster\_identifier** (*str*) – The unique identifier of a cluster. This parameter is case sensitive.
- **user** (*str, optional*) – The name of a database user.

- **database** (*str, optional*) – Database name. If None, the default Database is used.
- **duration** (*int, optional*) – The number of seconds until the returned temporary password expires. Constraint: minimum 900, maximum 3600. Default: 900
- **auto\_create** (*bool*) – Create a database user with the name specified for the user named in user if one does not exist.
- **db\_groups** (*List[str], optional*) – A list of the names of existing database groups that the user named in user will join for the current session, in addition to any group memberships for an existing user. If not specified, a new user is added only to PUBLIC.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **ssl** (*bool*) – This governs SSL encryption for TCP/IP sockets. This parameter is forward to redshift\_connector. <https://github.com/aws/amazon-redshift-python-driver>
- **timeout** (*int, optional*) – This is the time in seconds before the connection to the server will time out. The default is None which means no timeout. This parameter is forward to redshift\_connector. <https://github.com/aws/amazon-redshift-python-driver>
- **max\_prepared\_statements** (*int*) – This parameter is forward to redshift\_connector. <https://github.com/aws/amazon-redshift-python-driver>
- **tcp\_keepalive** (*bool*) – If True then use TCP keepalive. The default is True. This parameter is forward to redshift\_connector. <https://github.com/aws/amazon-redshift-python-driver>
- **\*\*kwargs** (*Any*) – Forwarded to redshift\_connector.connect. e.g. is\_serverless=True, serverless\_acct\_id='...', serverless\_work\_group='...'

**Returns**

redshift\_connector connection.

**Return type**

redshift\_connector.Connection

**Examples**

```
>>> import awswrangler as wr
>>> con = wr.redshift.connect_temp(cluster_identifier="my-cluster", user="test")
>>> with con.cursor() as cursor:
>>>     cursor.execute("SELECT 1")
>>>     print(cursor.fetchall())
>>> con.close()
```

**awswrangler.redshift.copy**

```
awswrangler.redshift.copy(df: DataFrame, path: str, con: redshift_connector.Connection, table: str, schema: str, iam_role: str | None = None, aws_access_key_id: str | None = None, aws_secret_access_key: str | None = None, aws_session_token: str | None = None, index: bool = False, dtype: Dict[str, str] | None = None, mode: Literal['append', 'overwrite', 'upsert'] = 'append', overwrite_method: Literal['drop', 'cascade', 'truncate', 'delete'] = 'drop', diststyle: Literal['AUTO', 'EVEN', 'ALL', 'KEY'] = 'AUTO', distkey: str | None = None, sortstyle: Literal['COMPOUND', 'INTERLEAVED'] = 'COMPOUND', sortkey: List[str] | None = None, primary_keys: List[str] | None = None, varchar_lengths_default: int = 256, varchar_lengths: Dict[str, int] | None = None, serialize_to_json: bool = False, keep_files: bool = False, use_threads: bool | int = True, lock: bool = False, commit_transaction: bool = True, sql_copy_extra_params: List[str] | None = None, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, str] | None = None, max_rows_by_file: int | None = 10000000, precombine_key: str | None = None, use_column_names: bool = False) → None
```

Load Pandas DataFrame as a Table on Amazon Redshift using parquet files on S3 as stage.

This is a **HIGH** latency and **HIGH** throughput alternative to `wr.redshift.to_sql()` to load large DataFrames into Amazon Redshift through the **\*\* SQL COPY command\*\***.

This strategy has more overhead and requires more IAM privileges than the regular `wr.redshift.to_sql()` function, so it is only recommended to inserting +1K rows at once.

[https://docs.aws.amazon.com/redshift/latest/dg/r\\_COPY.html](https://docs.aws.amazon.com/redshift/latest/dg/r_COPY.html)

---

**Note:** If the table does not exist yet, it will be automatically created for you using the Parquet metadata to infer the columns data types.

---

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
  - `s3_additional_kwargs`
- 

## Parameters

- **`df (pandas.DataFrame)`** – Pandas DataFrame.
- **`path (str)`** – S3 path to write stage files (e.g. `s3://bucket_name/any_name/`). Note: This path must be empty.
- **`con (redshift_connector.Connection)`** – Use `redshift_connector.connect()` to use "credentials directly or `wr.redshift.connect()` to fetch it from the Glue Catalog.
- **`table (str)`** – Table name
- **`schema (str)`** – Schema name
- **`iam_role (str, optional)`** – AWS IAM role with the related permissions.
- **`aws_access_key_id (str, optional)`** – The access key for your AWS account.
- **`aws_secret_access_key (str, optional)`** – The secret key for your AWS account.

- **aws\_session\_token** (*str, optional*) – The session key for your AWS account. This is only needed when you are using temporary credentials.
- **index** (*bool*) – True to store the DataFrame index in file, otherwise False to ignore it.
- **dtype** (*Dict[str, str], optional*) – Dictionary of columns names and Athena/Glue types to be casted. Useful when you have columns with undetermined or mixed data types. Only takes effect if dataset=True. (e.g. {‘col name’: ‘bigint’, ‘col2 name’: ‘int’})
- **mode** (*str*) – Append, overwrite or upsert.
- **overwrite\_method** (*str*) – Drop, cascade, truncate, or delete. Only applicable in overwrite mode.  
“drop” - DROP ... RESTRICT - drops the table. Fails if there are any views that depend on it.  
“cascade” - DROP ... CASCADE - drops the table, and all views that depend on it.  
“truncate” - TRUNCATE ... - truncates the table, but immediately commits current transaction & starts a new one, hence the overwrite happens in two transactions and is not atomic.  
“delete” - DELETE FROM ... - deletes all rows from the table. Slow relative to the other methods.
- **diststyle** (*str*) – Redshift distribution styles. Must be in [“AUTO”, “EVEN”, “ALL”, “KEY”]. [https://docs.aws.amazon.com/redshift/latest/dg/t\\_Distributing\\_data.html](https://docs.aws.amazon.com/redshift/latest/dg/t_Distributing_data.html)
- **distkey** (*str, optional*) – Specifies a column name or positional number for the distribution key.
- **sortstyle** (*str*) – Sorting can be “COMPOUND” or “INTERLEAVED”. [https://docs.aws.amazon.com/redshift/latest/dg/t\\_Sorting\\_data.html](https://docs.aws.amazon.com/redshift/latest/dg/t_Sorting_data.html)
- **sortkey** (*List[str], optional*) – List of columns to be sorted.
- **primary\_keys** (*List[str], optional*) – Primary keys.
- **varchar\_lengths\_default** (*int*) – The size that will be set for all VARCHAR columns not specified with varchar\_lengths.
- **varchar\_lengths** (*Dict[str, int], optional*) – Dict of VARCHAR length by columns. (e.g. {“col1”: 10, “col5”: 200}).
- **keep\_files** (*bool*) – Should keep stage files?
- **use\_threads** (*bool, int*) – True to enable concurrent requests, False to disable multiple threads. If enabled os.cpu\_count() will be used as the max number of threads. If integer is provided, specified number is used.
- **lock** (*bool*) – True to execute LOCK command inside the transaction to force serializable isolation.
- **commit\_transaction** (*bool*) – Whether to commit the transaction. True by default.
- **sql\_copy\_extra\_params** (*Optional[List[str]]*) – Additional copy parameters to pass to the command. For example: [“STATUPDATE ON”]
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **s3\_additional\_kwargs** (*Dict[str, str], optional*) – Forwarded to botocore requests. e.g. s3\_additional\_kwargs={‘ServerSideEncryption’: ‘aws:kms’, ‘SSEKMSKeyId’: ‘YOUR\_KMS\_KEY\_ARN’}
- **max\_rows\_by\_file** (*int*) – Max number of rows in each file. (e.g. 33554432, 268435456)
- **precombine\_key** (*str, optional*) – When there is a primary\_key match during upsert, this column will change the upsert method, comparing the values of the specified column

from source and target, and keeping the larger of the two. Will only work when mode = upsert.

- **use\_column\_names** (bool) – If set to True, will use the column names of the DataFrame for generating the INSERT SQL Query. E.g. If the DataFrame has two columns *col1* and *col3* and *use\_column\_names* is True, data will only be inserted into the database columns *col1* and *col3*.

**Returns**

None.

**Return type**

None

**Examples**

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> con = wr.redshift.connect("MY_GLUE_CONNECTION")
>>> wr.redshift.copy(
...     df=pd.DataFrame({'col': [1, 2, 3]}),
...     path="s3://bucket/my_parquet_files/",
...     con=con,
...     table="my_table",
...     schema="public",
...     iam_role="arn:aws:iam::XXX:role/XXX"
... )
>>> con.close()
```

**awswrangler.redshift.copy\_from\_files**

```
awswrangler.redshift.copy_from_files(path: str, con: redshift_connector.Connection, table: str, schema: str, iam_role: str | None = None, aws_access_key_id: str | None = None, aws_secret_access_key: str | None = None, aws_session_token: str | None = None, parquet_infer_sampling: float = 1.0, mode: Literal['append', 'overwrite', 'upsert'] = 'append', overwrite_method: Literal['drop', 'cascade', 'truncate', 'delete'] = 'drop', diststyle: Literal['AUTO', 'EVEN', 'ALL', 'KEY'] = 'AUTO', distkey: str | None = None, sortstyle: Literal['COMPOUND', 'INTERLEAVED'] = 'COMPOUND', sortkey: List[str] | None = None, primary_keys: List[str] | None = None, varchar_lengths_default: int = 256, varchar_lengths: Dict[str, int] | None = None, serialize_to_json: bool = False, path_suffix: str | None = None, path_ignore_suffix: str | None = None, use_threads: bool | int = True, lock: bool = False, commit_transaction: bool = True, manifest: bool | None = False, sql_copy_extra_params: List[str] | None = None, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, str] | None = None, precombine_key: str | None = None, column_names: List[str] | None = None) → None
```

Load Parquet files from S3 to a Table on Amazon Redshift (Through COPY command).

[https://docs.aws.amazon.com/redshift/latest/dg/r\\_COPY.html](https://docs.aws.amazon.com/redshift/latest/dg/r_COPY.html)

---

**Note:** If the table does not exist yet, it will be automatically created for you using the Parquet metadata to infer the columns data types.

---



---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

## Parameters

- **path (str)** – S3 prefix (e.g. `s3://bucket/prefix/`)
- **con (redshift\_connector.Connection)** – Use `redshift_connector.connect()` to use “credentials directly or `wr.redshift.connect()` to fetch it from the Glue Catalog.
- **table (str)** – Table name
- **schema (str)** – Schema name
- **iam\_role (str, optional)** – AWS IAM role with the related permissions.
- **aws\_access\_key\_id (str, optional)** – The access key for your AWS account.
- **aws\_secret\_access\_key (str, optional)** – The secret key for your AWS account.
- **aws\_session\_token (str, optional)** – The session key for your AWS account. This is only needed when you are using temporary credentials.
- **parquet\_infer\_sampling (float)** – Random sample ratio of files that will have the metadata inspected. Must be  $0.0 < sampling \leq 1.0$ . The higher, the more accurate. The lower, the faster.
- **mode (str)** – Append, overwrite or upsert.
- **overwrite\_method (str)** – Drop, cascade, truncate, or delete. Only applicable in overwrite mode.  
“drop” - `DROP ... RESTRICT` - drops the table. Fails if there are any views that depend on it.  
“cascade” - `DROP ... CASCADE` - drops the table, and all views that depend on it.  
“truncate” - `TRUNCATE ...` - truncates the table, but immediately commits current transaction & starts a new one, hence the overwrite happens in two transactions and is not atomic.  
“delete” - `DELETE FROM ...` - deletes all rows from the table. Slow relative to the other methods.
- **diststyle (str)** – Redshift distribution styles. Must be in [“AUTO”, “EVEN”, “ALL”, “KEY”]. [https://docs.aws.amazon.com/redshift/latest/dg/t\\_Distributing\\_data.html](https://docs.aws.amazon.com/redshift/latest/dg/t_Distributing_data.html)
- **distkey (str, optional)** – Specifies a column name or positional number for the distribution key.
- **sortstyle (str)** – Sorting can be “COMPOUND” or “INTERLEAVED”. [https://docs.aws.amazon.com/redshift/latest/dg/t\\_Sorting\\_data.html](https://docs.aws.amazon.com/redshift/latest/dg/t_Sorting_data.html)
- **sortkey (List[str], optional)** – List of columns to be sorted.
- **primary\_keys (List[str], optional)** – Primary keys.
- **varchar\_lengths\_default (int)** – The size that will be set for all VARCHAR columns not specified with `varchar_lengths`.
- **varchar\_lengths (Dict[str, int], optional)** – Dict of VARCHAR length by columns. (e.g. {“col1”: 10, “col5”: 200}).

- **serialize\_to\_json** (*bool*) – Should awswrangler add SERIALIZETOJSON parameter into the COPY command? SERIALIZETOJSON is necessary to load nested data [https://docs.aws.amazon.com/redshift/latest/dg/ingest-super.html#copy\\_json](https://docs.aws.amazon.com/redshift/latest/dg/ingest-super.html#copy_json)
- **path\_suffix** (*Union[str, List[str], None]*) – Suffix or List of suffixes to be scanned on s3 for the schema extraction (e.g. [“.gz.parquet”, “.snappy.parquet”]). Only has effect during the table creation. If None, will try to read all files. (default)
- **path\_ignore\_suffix** (*Union[str, List[str], None]*) – Suffix or List of suffixes for S3 keys to be ignored during the schema extraction. (e.g. [“.csv”, “\_SUCCESS”]). Only has effect during the table creation. If None, will try to read all files. (default)
- **use\_threads** (*bool, int*) – True to enable concurrent requests, False to disable multiple threads. If enabled os.cpu\_count() will be used as the max number of threads. If integer is provided, specified number is used.
- **lock** (*bool*) – True to execute LOCK command inside the transaction to force serializable isolation.
- **commit\_transaction** (*bool*) – Whether to commit the transaction. True by default.
- **manifest** (*bool*) – If set to true path argument accepts a S3 uri to a manifest file.
- **sql\_copy\_extra\_params** (*Optional[List[str]]*) – Additional copy parameters to pass to the command. For example: [“STATUPDATE ON”]
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **s3\_additional\_kwargs** (*Dict[str, str], optional*) – Forwarded to botocore requests. e.g. s3\_additional\_kwargs={‘ServerSideEncryption’: ‘aws:kms’, ‘SSEKMSKeyId’: ‘YOUR\_KMS\_KEY\_ARN’}
- **precombine\_key** (*str, optional*) – When there is a primary\_key match during upsert, this column will change the upsert method, comparing the values of the specified column from source and target, and keeping the larger of the two. Will only work when mode = upsert.
- **column\_names** (*List[str], optional*) – List of column names to map source data fields to the target columns.

**Returns**

None.

**Return type**

None

**Examples**

```
>>> import awswrangler as wr
>>> con = wr.redshift.connect("MY_GLUE_CONNECTION")
>>> wr.redshift.copy_from_files(
...     path="s3://bucket/my_parquet_files/",
...     con=con,
...     table="my_table",
...     schema="public",
...     iam_role="arn:aws:iam::XXX:role/XXX"
... )
>>> con.close()
```

**awswrangler.redshift.read\_sql\_query**

```
awswrangler.redshift.read_sql_query(sql: str, con: redshift_connector.Connection, index_col: str | List[str]
| None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] |
None = None, chunksize: None = None, dtype: Dict[str, DataType] |
None = None, safe: bool = True, timestamp_as_object: bool = False) → DataFrame

awswrangler.redshift.read_sql_query(sql: str, con: redshift_connector.Connection, *, index_col: str |
List[str] | None = None, params: List[Any] | Tuple[Any, ...] |
Dict[Any, Any] | None = None, chunksize: int, dtype: Dict[str,
DataType] | None = None, safe: bool = True, timestamp_as_object:
bool = False) → Iterator[pd.DataFrame]

awswrangler.redshift.read_sql_query(sql: str, con: redshift_connector.Connection, *, index_col: str |
List[str] | None = None, params: List[Any] | Tuple[Any, ...] |
Dict[Any, Any] | None = None, chunksize: int | None, dtype: Dict[str,
DataType] | None = None, safe: bool = True, timestamp_as_object:
bool = False) → pd.DataFrame | Iterator[pd.DataFrame]
```

Return a DataFrame corresponding to the result set of the query string.

---

**Note:** For large extractions (1K+ rows) consider the function **wr.redshift.unload()**.

---

**Parameters**

- **sql (str)** – SQL query.
- **con (redshift\_connector.Connection)** – Use redshift\_connector.connect() to use “credentials directly or wr.redshift.connect() to fetch it from the Glue Catalog.
- **index\_col (Union[str, List[str]], optional)** – Column(s) to set as index(MultiIndex).
- **params (Union[List, Tuple, Dict], optional)** – List of parameters to pass to execute method. The syntax used to pass parameters is database driver dependent. Check your database driver documentation for which of the five syntax styles, described in PEP 249’s paramstyle, is supported.
- **chunksize (int, optional)** – If specified, return an iterator where chunksize is the number of rows to include in each chunk.
- **dtype (Dict[str, pyarrow.DataType], optional)** – Specifying the datatype for columns. The keys should be the column names and the values should be the PyArrow types.
- **safe (bool)** – Check for overflows or other unsafe data type conversions.
- **timestamp\_as\_object (bool)** – Cast non-nanosecond timestamps (np.datetime64) to objects.

**Returns**

Result as Pandas DataFrame(s).

**Return type**

Union[pandas.DataFrame, Iterator[pandas.DataFrame]]

## Examples

Reading from Redshift using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.redshift.connect("MY_GLUE_CONNECTION")
>>> df = wr.redshift.read_sql_query(
...     sql="SELECT * FROM public.my_table",
...     con=con
... )
>>> con.close()
```

### awswrangler.redshift.read\_sql\_table

```
awswrangler.redshift.read_sql_table(table: str, con: redshift_connector.Connection, *, schema: str | None = None, index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None = None, chunksize: None = None, dtype: Dict[str, DataType] | None = None, safe: bool = True, timestamp_as_object: bool = False) → DataFrame
awswrangler.redshift.read_sql_table(table: str, con: redshift_connector.Connection, *, schema: str | None = None, index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None = None, chunksize: int, dtype: Dict[str, DataType] | None = None, safe: bool = True, timestamp_as_object: bool = False) → Iterator[pd.DataFrame]
awswrangler.redshift.read_sql_table(table: str, con: redshift_connector.Connection, *, schema: str | None = None, index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None = None, chunksize: int | None, dtype: Dict[str, DataType] | None = None, safe: bool = True, timestamp_as_object: bool = False) → pd.DataFrame | Iterator[pd.DataFrame]
```

Return a DataFrame corresponding the table.

---

**Note:** For large extractions (1K+ rows) consider the function `wr.redshift.unload()`.

---

### Parameters

- **table (str)** – Table name.
- **con (redshift\_connector.Connection)** – Use `redshift_connector.connect()` to use “credentials directly or `wr.redshift.connect()` to fetch it from the Glue Catalog.
- **schema (str, optional)** – Name of SQL schema in database to query (if database flavor supports this). Uses default schema if None (default).
- **index\_col (Union[str, List[str]], optional)** – Column(s) to set as index(MultiIndex).
- **params (Union[List, Tuple, Dict], optional)** – List of parameters to pass to execute method. The syntax used to pass parameters is database driver dependent. Check your database driver documentation for which of the five syntax styles, described in PEP 249’s paramstyle, is supported.
- **chunksize (int, optional)** – If specified, return an iterator where chunksize is the number of rows to include in each chunk.

- **dtype** (*Dict[str, pyarrow.DataType], optional*) – Specifying the datatype for columns. The keys should be the column names and the values should be the PyArrow types.
- **safe** (*bool*) – Check for overflows or other unsafe data type conversions.
- **timestamp\_as\_object** (*bool*) – Cast non-nanosecond timestamps (np.datetime64) to objects.

**Returns**

Result as Pandas DataFrame(s).

**Return type**

`Union[pandas.DataFrame, Iterator[pandas.DataFrame]]`

**Examples**

Reading from Redshift using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.redshift.connect("MY_GLUE_CONNECTION")
>>> df = wr.redshift.read_sql_table(
...     table="my_table",
...     schema="public",
...     con=con
... )
>>> con.close()
```

**awswrangler.redshift.to\_sql**

```
awswrangler.redshift.to_sql(df: DataFrame, con: redshift_connector.Connection, table: str, schema: str,
                            mode: Literal['append', 'overwrite', 'upsert'] = 'append', overwrite_method:
                            Literal['drop', 'cascade', 'truncate', 'delete'] = 'drop', index: bool = False, dtype:
                            Dict[str, str] | None = None, diststyle: Literal['AUTO', 'EVEN', 'ALL', 'KEY'] =
                            'AUTO', distkey: str | None = None, sortstyle: Literal['COMPOUND',
                            'INTERLEAVED'] = 'COMPOUND', sortkey: List[str] | None = None,
                            primary_keys: List[str] | None = None, varchar_lengths_default: int = 256,
                            varchar_lengths: Dict[str, int] | None = None, use_column_names: bool =
                            False, lock: bool = False, chunksize: int = 200, commit_transaction: bool =
                            True, precombine_key: str | None = None) → None
```

Write records stored in a DataFrame into Redshift.

---

**Note:** For large DataFrames (1K+ rows) consider the function `wr.redshift.copy()`.

---



---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `chunksize`

Check out the [Global Configurations Tutorial](#) for details.

---

**Parameters**

- **df** (*pandas.DataFrame*) – Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>
- **con** (*redshift\_connector.Connection*) – Use `redshift_connector.connect()` to use “credentials directly or `wr.redshift.connect()` to fetch it from the Glue Catalog.
- **table** (*str*) – Table name
- **schema** (*str*) – Schema name
- **mode** (*str*) – Append, overwrite or upsert.
- **overwrite\_method** (*str*) – Drop, cascade, truncate, or delete. Only applicable in overwrite mode.

“drop” - `DROP ... RESTRICT` - drops the table. Fails if there are any views that depend on it.  
“cascade” - `DROP ... CASCADE` - drops the table, and all views that depend on it.  
“truncate” - `TRUNCATE ...` - truncates the table, but immediately commits current transaction & starts a new one, hence the overwrite happens in two transactions and is not atomic.  
“delete” - `DELETE FROM ...` - deletes all rows from the table. Slow relative to the other methods.
- **index** (*bool*) – True to store the DataFrame index as a column in the table, otherwise False to ignore it.
- **dtype** (*Dict[str, str], optional*) – Dictionary of columns names and Redshift types to be casted. Useful when you have columns with undetermined or mixed data types. (e.g. `{‘col name’: ‘VARCHAR(10)’, ‘col2 name’: ‘FLOAT’}`) `diststyle` : *str* Redshift distribution styles. Must be in [“AUTO”, “EVEN”, “ALL”, “KEY”]. [https://docs.aws.amazon.com/redshift/latest/dg/t\\_Distributing\\_data.html](https://docs.aws.amazon.com/redshift/latest/dg/t_Distributing_data.html)
- **distkey** (*str, optional*) – Specifies a column name or positional number for the distribution key.
- **sortstyle** (*str*) – Sorting can be “COMPOUND” or “INTERLEAVED”. [https://docs.aws.amazon.com/redshift/latest/dg/t\\_Sorting\\_data.html](https://docs.aws.amazon.com/redshift/latest/dg/t_Sorting_data.html)
- **sortkey** (*List[str], optional*) – List of columns to be sorted.
- **primary\_keys** (*List[str], optional*) – Primary keys.
- **varchar\_lengths\_default** (*int*) – The size that will be set for all VARCHAR columns not specified with `varchar_lengths`.
- **varchar\_lengths** (*Dict[str, int], optional*) – Dict of VARCHAR length by columns. (e.g. `{“col1”: 10, “col5”: 200}`).
- **use\_column\_names** (*bool*) – If set to True, will use the column names of the DataFrame for generating the INSERT SQL Query. E.g. If the DataFrame has two columns `col1` and `col3` and `use_column_names` is True, data will only be inserted into the database columns `col1` and `col3`.
- **lock** (*bool*) – True to execute LOCK command inside the transaction to force serializable isolation.
- **chunksize** (*int*) – Number of rows which are inserted with each SQL query. Defaults to inserting 200 rows per query.
- **commit\_transaction** (*bool*) – Whether to commit the transaction. True by default.
- **precombine\_key** (*str, optional*) – When there is a primary\_key match during upsert, this column will change the upsert method, comparing the values of the specified column from source and target, and keeping the larger of the two. Will only work when mode = upsert.

**Returns**

None.

**Return type**

None

**Examples**

Writing to Redshift using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.redshift.connect("MY_GLUE_CONNECTION")
>>> wr.redshift.to_sql(
...     df=df,
...     table="my_table",
...     schema="public",
...     con=con
... )
>>> con.close()
```

**awswrangler.redshift.unload**

```
awswrangler.redshift.unload(sql: str, path: str, con: redshift_connector.Connection, iam_role: str | None = None, aws_access_key_id: str | None = None, aws_secret_access_key: str | None = None, aws_session_token: str | None = None, region: str | None = None, max_file_size: float | None = None, kms_key_id: str | None = None, chunked: bool | int = False, keep_files: bool = False, use_threads: bool | int = True, boto3_session: Session | None = None, s3_additional_kwargs: Dict[str, str] | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → DataFrame | Iterator[DataFrame]
```

Load Pandas DataFrame from a Amazon Redshift query result using Parquet files on s3 as stage.

This is a **HIGH** latency and **HIGH** throughput alternative to `wr.redshift.read_sql_query()/wr.redshift.read_sql_table()` to extract large Amazon Redshift data into a Pandas DataFrames through the **UNLOAD command**.

This strategy has more overhead and requires more IAM privileges than the regular `wr.redshift.read_sql_query()/wr.redshift.read_sql_table()` function, so it is only recommended to fetch 1k+ rows at once.

[https://docs.aws.amazon.com/redshift/latest/dg/r\\_UNLOAD.html](https://docs.aws.amazon.com/redshift/latest/dg/r_UNLOAD.html)

**Note:** Batching (`chunked` argument) (Memory Friendly):

Will enable the function to return an Iterable of DataFrames instead of a regular DataFrame.

There are two batching strategies on awswrangler:

- If `chunked=True`, depending on the size of the data, one or more data frames are returned per file. Unlike `chunked=INTEGER`, rows from different files are not be mixed in the resulting data frames.
- If `chunked=INTEGER`, awswrangler iterates on the data by number of rows (equal to the received INTEGER).

P.S. `chunked=True` is faster and uses less memory while `chunked=INTEGER` is more precise in the number of rows for each DataFrame.

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
  - `s3_additional_kwargs`
- 

### Parameters

- `sql (str)` – SQL query.
- `path (Union[str, List[str]])` – S3 path to write stage files (e.g. `s3://bucket_name/any_name/`)
- `con (redshift_connector.Connection)` – Use `redshift_connector.connect()` to use “credentials directly or `wr.redshift.connect()` to fetch it from the Glue Catalog.
- `iam_role (str, optional)` – AWS IAM role with the related permissions.
- `aws_access_key_id (str, optional)` – The access key for your AWS account.
- `aws_secret_access_key (str, optional)` – The secret key for your AWS account.
- `aws_session_token (str, optional)` – The session key for your AWS account. This is only needed when you are using temporary credentials.
- `region (str, optional)` – Specifies the AWS Region where the target Amazon S3 bucket is located. REGION is required for UNLOAD to an Amazon S3 bucket that isn’t in the same AWS Region as the Amazon Redshift cluster. By default, UNLOAD assumes that the target Amazon S3 bucket is located in the same AWS Region as the Amazon Redshift cluster.
- `max_file_size (float, optional)` – Specifies the maximum size (MB) of files that UNLOAD creates in Amazon S3. Specify a decimal value between 5.0 MB and 6200.0 MB. If None, the default maximum file size is 6200.0 MB.
- `kms_key_id (str, optional)` – Specifies the key ID for an AWS Key Management Service (AWS KMS) key to be used to encrypt data files on Amazon S3.
- `keep_files (bool)` – Should keep stage files?
- `chunked (Union[int, bool])` – If passed will split the data in a Iterable of DataFrames (Memory friendly). If `True` awswrangler iterates on the data by files in the most efficient way without guarantee of chunksize. If an `INTEGER` is passed awswrangler will iterate on the data by number of rows equal the received INTEGER.
- `use_threads (bool, int)` – True to enable concurrent requests, False to disable multiple threads. If enabled `os.cpu_count()` will be used as the max number of threads. If integer is provided, specified number is used.
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.
- `s3_additional_kwargs (Dict[str, str], optional)` – Forward to botocore requests.
- `pyarrow_additional_kwargs (Dict[str, Any], optional)` – Forwarded to `to_pandas` method converting from PyArrow tables to Pandas DataFrame.

Valid values include “split\_blocks”, “self\_destruct”, “ignore\_metadata”. e.g.  
`pyarrow_additional_kwargs={‘split_blocks’: True}`.

**Returns**

Result as Pandas DataFrame(s).

**Return type**

`Union[pandas.DataFrame, Iterator[pandas.DataFrame]]`

**Examples**

```
>>> import awswrangler as wr
>>> con = wr.redshift.connect("MY_GLUE_CONNECTION")
>>> df = wr.redshift.unload(
...     sql="SELECT * FROM public.mytable",
...     path="s3://bucket/extracted_parquet_files/",
...     con=con,
...     iam_role="arn:aws:iam::XXX:role/XXX"
... )
>>> con.close()
```

**awswrangler.redshift.unload\_to\_files**

`awswrangler.redshift.unload_to_files(sql: str, path: str, con: redshift_connector.Connection, iam_role: str | None = None, aws_access_key_id: str | None = None, aws_secret_access_key: str | None = None, aws_session_token: str | None = None, region: str | None = None, unload_format: Literal['CSV', 'PARQUET'] | None = None, max_file_size: float | None = None, kms_key_id: str | None = None, manifest: bool = False, partition_cols: List[str] | None = None, boto3_session: Session | None = None) → None`

Unload Parquet files on s3 from a Redshift query result (Through the UNLOAD command).

[https://docs.aws.amazon.com/redshift/latest/dg/r\\_UNLOAD.html](https://docs.aws.amazon.com/redshift/latest/dg/r_UNLOAD.html)

---

**Note:** In case of `use_threads=True` the number of threads that will be spawned will be gotten from `os.cpu_count()`.

---

**Parameters**

- **sql (str)** – SQL query.
- **path (Union[str, List[str]])** – S3 path to write stage files (e.g. `s3://bucket_name/any_name/`)
- **con (redshift\_connector.Connection)** – Use `redshift_connector.connect()` to use “credentials directly or `wr.redshift.connect()` to fetch it from the Glue Catalog.
- **iam\_role (str, optional)** – AWS IAM role with the related permissions.
- **aws\_access\_key\_id (str, optional)** – The access key for your AWS account.
- **aws\_secret\_access\_key (str, optional)** – The secret key for your AWS account.

- **aws\_session\_token** (*str, optional*) – The session key for your AWS account. This is only needed when you are using temporary credentials.
- **region** (*str, optional*) – Specifies the AWS Region where the target Amazon S3 bucket is located. REGION is required for UNLOAD to an Amazon S3 bucket that isn't in the same AWS Region as the Amazon Redshift cluster. By default, UNLOAD assumes that the target Amazon S3 bucket is located in the same AWS Region as the Amazon Redshift cluster.
- **unload\_format** (*str, optional*) – Format of the unloaded S3 objects from the query. Valid values: "CSV", "PARQUET". Case sensitive. Defaults to PARQUET.
- **max\_file\_size** (*float, optional*) – Specifies the maximum size (MB) of files that UNLOAD creates in Amazon S3. Specify a decimal value between 5.0 MB and 6200.0 MB. If None, the default maximum file size is 6200.0 MB.
- **kms\_key\_id** (*str, optional*) – Specifies the key ID for an AWS Key Management Service (AWS KMS) key to be used to encrypt data files on Amazon S3.
- **manifest** (*bool*) – Unload a manifest file on S3.
- **partition\_cols** (*List[str], optional*) – Specifies the partition keys for the unload operation.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Return type**

None

**Examples**

```
>>> import awswrangler as wr
>>> con = wr.redshift.connect("MY_GLUE_CONNECTION")
>>> wr.redshift.unload_to_files(
...     sql="SELECT * FROM public.mytable",
...     path="s3://bucket/extracted_parquet_files/",
...     con=con,
...     iam_role="arn:aws:iam::XXX:role/XXX"
... )
>>> con.close()
```

## 1.9.6 PostgreSQL

<code>connect([connection, secret_id, catalog_id, ...])</code>	Return a pg8000 connection from a Glue Catalog Connection.
<code>read_sql_query()</code>	Return a DataFrame corresponding to the result set of the query string.
<code>read_sql_table()</code>	Return a DataFrame corresponding the table.
<code>to_sql(df, con, table, schema[, mode, ...])</code>	Write records stored in a DataFrame into PostgreSQL.

## awswrangler.postgresql.connect

```
awswrangler.postgresql.connect(connection: str | None = None, secret_id: str | None = None, catalog_id: str | None = None, dbname: str | None = None, boto3_session: Session | None = None, ssl_context: bool | SSLContext | None = None, timeout: int | None = None, tcp_keepalive: bool = True) → pg8000.Connection
```

Return a pg8000 connection from a Glue Catalog Connection.

<https://github.com/tlocke/pg8000>

---

**Note:** You MUST pass a *connection* OR *secret\_id*. Here is an example of the secret structure in Secrets Manager: { “host”：“postgresql-instance-wrangler.dr8vkeyrb9ml.us-east-1.rds.amazonaws.com”, “username”：“test”, “password”：“test”, “engine”：“postgresql”, “port”：“3306”, “dbname”：“mydb” # Optional }

---

### Parameters

- **connection** (*Optional[str]*) – Glue Catalog Connection name.
- **secret\_id** (*Optional[str]*) – Specifies the secret containing the connection details that you want to retrieve. You can specify either the Amazon Resource Name (ARN) or the friendly name of the secret.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog. If none is provided, the AWS account ID is used by default.
- **dbname** (*Optional[str]*) – Optional database name to overwrite the stored one.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **ssl\_context** (*Optional[Union[bool, SSLContext]]*) – This governs SSL encryption for TCP/IP sockets. This parameter is forward to pg8000. <https://github.com/tlocke/pg8000#functions>
- **timeout** (*Optional[int]*) – This is the time in seconds before the connection to the server will time out. The default is None which means no timeout. This parameter is forward to pg8000. <https://github.com/tlocke/pg8000#functions>
- **tcp\_keepalive** (*bool*) – If True then use TCP keepalive. The default is True. This parameter is forward to pg8000. <https://github.com/tlocke/pg8000#functions>

### Returns

pg8000 connection.

### Return type

pg8000.Connection

## Examples

```
>>> import awswrangler as wr
>>> con = wr.postgresql.connect("MY_GLUE_CONNECTION")
>>> with con.cursor() as cursor:
>>>     cursor.execute("SELECT 1")
>>>     print(cursor.fetchall())
>>> con.close()
```

## awswrangler.postgresql.read\_sql\_query

```
awswrangler.postgresql.read_sql_query(sql: str, con: pg8000.Connection, index_col: str | List[str] | None
= None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] |
None = None, chunksize: None = None, dtype: Dict[str, DataType] |
None = None, safe: bool = True, timestamp_as_object: bool =
False) → DataFrame

awswrangler.postgresql.read_sql_query(sql: str, con: pg8000.Connection, *, index_col: str | List[str] |
None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] |
None = None, chunksize: int, dtype: Dict[str, DataType] | None =
None, safe: bool = True, timestamp_as_object: bool = False) →
Iterator[pd.DataFrame]

awswrangler.postgresql.read_sql_query(sql: str, con: pg8000.Connection, *, index_col: str | List[str] |
None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] |
None = None, chunksize: int | None, dtype: Dict[str, DataType] |
None = None, safe: bool = True, timestamp_as_object: bool =
False) → pd.DataFrame | Iterator[pd.DataFrame]
```

Return a DataFrame corresponding to the result set of the query string.

### Parameters

- **sql (str)** – SQL query.
- **con (pg8000.Connection)** – Use pg8000.connect() to use credentials directly or wr.postgresql.connect() to fetch it from the Glue Catalog.
- **index\_col (Union[str, List[str]], optional)** – Column(s) to set as index(MultiIndex).
- **params (Union[List, Tuple, Dict], optional)** – List of parameters to pass to execute method. The syntax used to pass parameters is database driver dependent. Check your database driver documentation for which of the five syntax styles, described in PEP 249's paramstyle, is supported.
- **chunksize (int, optional)** – If specified, return an iterator where chunksize is the number of rows to include in each chunk.
- **dtype (Dict[str, pyarrow.DataType], optional)** – Specifying the datatype for columns. The keys should be the column names and the values should be the PyArrow types.
- **safe (bool)** – Check for overflows or other unsafe data type conversions.
- **timestamp\_as\_object (bool)** – Cast non-nanosecond timestamps (np.datetime64) to objects.

### Returns

Result as Pandas DataFrame(s).

**Return type**

Union[pandas.DataFrame, Iterator[pandas.DataFrame]]

**Examples**

Reading from PostgreSQL using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.postgresql.connect("MY_GLUE_CONNECTION")
>>> df = wr.postgresql.read_sql_query(
...     sql="SELECT * FROM public.my_table",
...     con=con
... )
>>> con.close()
```

**awswrangler.postgresql.read\_sql\_table**

`awswrangler.postgresql.read_sql_table(table: str, con: pg8000.Connection, schema: str | None = None, index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None = None, chunksize: None = None, dtype: Dict[str, DataType] | None = None, safe: bool = True, timestamp_as_object: bool = False) → DataFrame`

`awswrangler.postgresql.read_sql_table(table: str, con: pg8000.Connection, *, schema: str | None = None, index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None = None, chunksize: int, dtype: Dict[str, DataType] | None = None, safe: bool = True, timestamp_as_object: bool = False) → Iterator[pd.DataFrame]`

`awswrangler.postgresql.read_sql_table(table: str, con: pg8000.Connection, *, schema: str | None = None, index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None = None, chunksize: int | None, dtype: Dict[str, DataType] | None = None, safe: bool = True, timestamp_as_object: bool = False) → pd.DataFrame | Iterator[pd.DataFrame]`

Return a DataFrame corresponding the table.

**Parameters**

- **table (str)** – Table name.
- **con (pg8000.Connection)** – Use pg8000.connect() to use credentials directly or wr.postgresql.connect() to fetch it from the Glue Catalog.
- **schema (str, optional)** – Name of SQL schema in database to query (if database flavor supports this). Uses default schema if None (default).
- **index\_col (Union[str, List[str]], optional)** – Column(s) to set as index(MultiIndex).
- **params (Union[List, Tuple, Dict], optional)** – List of parameters to pass to execute method. The syntax used to pass parameters is database driver dependent. Check your database driver documentation for which of the five syntax styles, described in PEP 249's paramstyle, is supported.
- **chunksize (int, optional)** – If specified, return an iterator where chunksize is the number of rows to include in each chunk.

- **dtype** (*Dict[str, pyarrow.DataType], optional*) – Specifying the datatype for columns. The keys should be the column names and the values should be the PyArrow types.
- **safe** (*bool*) – Check for overflows or other unsafe data type conversions.
- **timestamp\_as\_object** (*bool*) – Cast non-nanosecond timestamps (np.datetime64) to objects.

**Returns**

Result as Pandas DataFrame(s).

**Return type**

Union[pandas.DataFrame, Iterator[pandas.DataFrame]]

## Examples

Reading from PostgreSQL using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.postgresql.connect("MY_GLUE_CONNECTION")
>>> df = wr.postgresql.read_sql_table(
...     table="my_table",
...     schema="public",
...     con=con
... )
>>> con.close()
```

## awswrangler.postgresql.to\_sql

```
awswrangler.postgresql.to_sql(df: DataFrame, con: pg8000.Connection, table: str, schema: str, mode:
    Literal['append', 'overwrite', 'upsert'] = 'append', index: bool = False, dtype:
    Dict[str, str] | None = None, varchar_lengths: Dict[str, int] | None = None,
    use_column_names: bool = False, chunksize: int = 200,
    upsert_conflict_columns: List[str] | None = None, insert_conflict_columns:
    List[str] | None = None) → None
```

Write records stored in a DataFrame into PostgreSQL.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `chunksize`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- **df** ([pandas.DataFrame](#)) – Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>
- **con** ([pg8000.Connection](#)) – Use `pg8000.connect()` to use credentials directly or `wr.postgresql.connect()` to fetch it from the Glue Catalog.
- **table** (*str*) – Table name

- **schema (str)** – Schema name
- **mode (str)** –

**Append, overwrite or upsert.**

append: Inserts new records into table. overwrite: Drops table and recreates. upsert: Perform an upsert which checks for conflicts on columns given by *upsert\_conflict\_columns* and sets the new values on conflicts. Note that *upsert\_conflict\_columns* is required for this mode.

- **index (bool)** – True to store the DataFrame index as a column in the table, otherwise False to ignore it.
- **dtype (Dict[str, str], optional)** – Dictionary of columns names and PostgreSQL types to be casted. Useful when you have columns with undetermined or mixed data types. (e.g. {‘col name’: ‘TEXT’, ‘col2 name’: ‘FLOAT’})
- **varchar\_lengths (Dict[str, int], optional)** – Dict of VARCHAR length by columns. (e.g. {“col1”: 10, “col5”: 200}).
- **use\_column\_names (bool)** – If set to True, will use the column names of the DataFrame for generating the INSERT SQL Query. E.g. If the DataFrame has two columns *col1* and *col3* and *use\_column\_names* is True, data will only be inserted into the database columns *col1* and *col3*.
- **chunksize (int)** – Number of rows which are inserted with each SQL query. Defaults to inserting 200 rows per query.
- **upsert\_conflict\_columns (List[str], optional)** – This parameter is only supported if *mode* is set top *upsert*. In this case conflicts for the given columns are checked for evaluating the upsert.
- **insert\_conflict\_columns (List[str], optional)** – This parameter is only supported if *mode* is set top *append*. In this case conflicts for the given columns are checked for evaluating the insert ‘ON CONFLICT DO NOTHING’.

**Returns**

None.

**Return type**

None

## Examples

Writing to PostgreSQL using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.postgresql.connect("MY_GLUE_CONNECTION")
>>> wr.postgresql.to_sql(
...     df=df,
...     table="my_table",
...     schema="public",
...     con=con
... )
>>> con.close()
```

## 1.9.7 MySQL

<code>connect([connection, secret_id, catalog_id, ...])</code>	Return a pymysql connection from a Glue Catalog Connection or Secrets Manager.
<code>read_sql_query()</code>	Return a DataFrame corresponding to the result set of the query string.
<code>read_sql_table()</code>	Return a DataFrame corresponding the table.
<code>to_sql(df, con, table, schema[, mode, ...])</code>	Write records stored in a DataFrame into MySQL.

### `awswrangler.mysql.connect`

```
awswrangler.mysql.connect(connection: str | None = None, secret_id: str | None = None, catalog_id: str | None = None, dbname: str | None = None, boto3_session: Session | None = None, read_timeout: int | None = None, write_timeout: int | None = None, connect_timeout: int = 10, cursorclass: Type[pymysql.cursors.Cursor] | None = None) → pymysql.connections.Connection[Any]
```

Return a pymysql connection from a Glue Catalog Connection or Secrets Manager.

<https://pymysql.readthedocs.io>

---

**Note:** You MUST pass a `connection` OR `secret_id`. Here is an example of the secret structure in Secrets Manager: { “host”：“mysql-instance-wrangler.dr8vkeyrb9m1.us-east-1.rds.amazonaws.com”, “username”：“test”, “password”：“test”, “engine”：“mysql”, “port”：“3306”, “dbname”：“mydb” # Optional }

---

---

**Note:** It is only possible to configure SSL using Glue Catalog Connection. More at: <https://docs.aws.amazon.com/glue/latest/dg/connection-defining.html>

---

---

**Note:** Consider using `SSCursor cursorclass` for queries that return a lot of data. More at: <https://pymysql.readthedocs.io/en/latest/modules/cursors.html#pymysql.cursors.SSCursor>

---

#### Parameters

- **connection (str)** – Glue Catalog Connection name.
- **secret\_id (Optional[str]):** – Specifies the secret containing the connection details that you want to retrieve. You can specify either the Amazon Resource Name (ARN) or the friendly name of the secret.
- **catalog\_id (str, optional)** – The ID of the Data Catalog. If none is provided, the AWS account ID is used by default.
- **dbname (Optional[str])** – Optional database name to overwrite the stored one.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **read\_timeout (Optional[int])** – The timeout for reading from the connection in seconds (default: None - no timeout). This parameter is forward to pymysql. <https://pymysql.readthedocs.io/en/latest/modules/connections.html>

- **write\_timeout** (*Optional[int]*) – The timeout for writing to the connection in seconds (default: None - no timeout) This parameter is forward to pymysql. <https://pymysql.readthedocs.io/en/latest/modules/connections.html>
- **connect\_timeout** (*int*) – Timeout before throwing an exception when connecting. (default: 10, min: 1, max: 31536000) This parameter is forward to pymysql. <https://pymysql.readthedocs.io/en/latest/modules/connections.html>
- **cursorclass** (*Cursor*) – Cursor class to use, e.g. SSCursor; defaults to pymysql.cursors.Cursor <https://pymysql.readthedocs.io/en/latest/modules/cursors.html>

**Returns**

pymysql connection.

**Return type**

pymysql.connections.Connection

**Examples**

```
>>> import awswrangler as wr
>>> con = wr.mysql.connect("MY_GLUE_CONNECTION")
>>> with con.cursor() as cursor:
>>>     cursor.execute("SELECT 1")
>>>     print(cursor.fetchall())
>>> con.close()
```

**awswrangler.mysql.read\_sql\_query**

`awswrangler.mysql.read_sql_query(sql: str, con: pymysql.connections.Connection[Any], index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None = None, chunksize: None = None, dtype: Dict[str, DataType] | None = None, safe: bool = True, timestamp_as_object: bool = False) → DataFrame`

`awswrangler.mysql.read_sql_query(sql: str, con: pymysql.connections.Connection[Any], *, index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None = None, chunksize: int, dtype: Dict[str, DataType] | None = None, safe: bool = True, timestamp_as_object: bool = False) → Iterator[pd.DataFrame]`

`awswrangler.mysql.read_sql_query(sql: str, con: pymysql.connections.Connection[Any], *, index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None = None, chunksize: int | None, dtype: Dict[str, DataType] | None = None, safe: bool = True, timestamp_as_object: bool = False) → pd.DataFrame | Iterator[pd.DataFrame]`

Return a DataFrame corresponding to the result set of the query string.

**Parameters**

- **sql** (*str*) – SQL query.
- **con** (*pymysql.connections.Connection*) – Use pymysql.connect() to use credentials directly or wr.mysql.connect() to fetch it from the Glue Catalog.
- **index\_col** (*Union[str, List[str]]*, *optional*) – Column(s) to set as index(MultiIndex).

- **params** (*Union[List, Tuple, Dict]*, *optional*) – List of parameters to pass to execute method. The syntax used to pass parameters is database driver dependent. Check your database driver documentation for which of the five syntax styles, described in PEP 249's paramstyle, is supported.
- **chunksize** (*int*, *optional*) – If specified, return an iterator where chunksize is the number of rows to include in each chunk.
- **dtype** (*Dict[str, pyarrow.DataType]*, *optional*) – Specifying the datatype for columns. The keys should be the column names and the values should be the PyArrow types.
- **safe** (*bool*) – Check for overflows or other unsafe data type conversions.
- **timestamp\_as\_object** (*bool*) – Cast non-nanosecond timestamps (np.datetime64) to objects.

#### Returns

Result as Pandas DataFrame(s).

#### Return type

*Union[pandas.DataFrame, Iterator[pandas.DataFrame]]*

## Examples

Reading from MySQL using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.mysql.connect("MY_GLUE_CONNECTION")
>>> df = wr.mysql.read_sql_query(
...     sql="SELECT * FROM test.my_table",
...     con=con
... )
>>> con.close()
```

### awswrangler.mysql.read\_sql\_table

```
awswrangler.mysql.read_sql_table(table: str, con: pymysql.connections.Connection[Any], schema: str | None = None, index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None = None, chunksize: None = None, dtype: Dict[str, DataType] | None = None, safe: bool = True, timestamp_as_object: bool = False) → DataFrame

awswrangler.mysql.read_sql_table(table: str, con: pymysql.connections.Connection[Any], *, schema: str | None = None, index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None = None, chunksize: int, dtype: Dict[str, DataType] | None = None, safe: bool = True, timestamp_as_object: bool = False) → Iterator[pd.DataFrame]

awswrangler.mysql.read_sql_table(table: str, con: pymysql.connections.Connection[Any], *, schema: str | None = None, index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None = None, chunksize: int | None, dtype: Dict[str, DataType] | None = None, safe: bool = True, timestamp_as_object: bool = False) → pd.DataFrame | Iterator[pd.DataFrame]
```

Return a DataFrame corresponding the table.

## Parameters

- **table** (*str*) – Table name.
- **con** (*pymysql.connections.Connection*) – Use `pymysql.connect()` to use credentials directly or `wr.mysql.connect()` to fetch it from the Glue Catalog.
- **schema** (*str, optional*) – Name of SQL schema in database to query. Uses default schema if None.
- **index\_col** (*Union[str, List[str]], optional*) – Column(s) to set as index(MultiIndex).
- **params** (*Union[List, Tuple, Dict], optional*) – List of parameters to pass to execute method. The syntax used to pass parameters is database driver dependent. Check your database driver documentation for which of the five syntax styles, described in PEP 249's `paramstyle`, is supported.
- **chunksize** (*int, optional*) – If specified, return an iterator where `chunksize` is the number of rows to include in each chunk.
- **dtype** (*Dict[str, pyarrow.DataType], optional*) – Specifying the datatype for columns. The keys should be the column names and the values should be the PyArrow types.
- **safe** (*bool*) – Check for overflows or other unsafe data type conversions.
- **timestamp\_as\_object** (*bool*) – Cast non-nanosecond timestamps (`np.datetime64`) to objects.

## Returns

Result as Pandas DataFrame(s).

## Return type

`Union[pandas.DataFrame, Iterator[pandas.DataFrame]]`

## Examples

Reading from MySQL using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.mysql.connect("MY_GLUE_CONNECTION")
>>> df = wr.mysql.read_sql_table(
...     table="my_table",
...     schema="test",
...     con=con
... )
>>> con.close()
```

## awswrangler.mysql.to\_sql

```
awswrangler.mysql.to_sql(df: DataFrame, con: pymysql.connections.Connection[Any], table: str, schema: str, mode: Literal['append', 'overwrite', 'upsert_replace_into', 'upsert_duplicate_key', 'upsert_distinct', 'ignore'] = 'append', index: bool = False, dtype: Dict[str, str] | None = None, varchar_lengths: Dict[str, int] | None = None, use_column_names: bool = False, chunksize: int = 200, cursorclass: Type[pymysql.cursors.Cursor] | None = None) → None
```

Write records stored in a DataFrame into MySQL.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `chunksize`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- **`df` (`pandas.DataFrame`)** – Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>
- **`con` (`pymysql.connections.Connection`)** – Use `pymysql.connect()` to use credentials directly or `wr.mysql.connect()` to fetch it from the Glue Catalog.
- **`table` (`str`)** – Table name
- **`schema` (`str`)** – Schema name
- **`mode` (`str`)** –  
**`append`, `overwrite`, `upsert_duplicate_key`, `upsert_replace_into`, `upsert_distinct`, `ignore`.**  
`append`: Inserts new records into table. `overwrite`: Drops table and recreates. `upsert_duplicate_key`: Performs an upsert using *ON DUPLICATE KEY* clause. Requires table schema to have defined keys, otherwise duplicate records will be inserted. `upsert_replace_into`: Performs upsert using *REPLACE INTO* clause. Less efficient and still requires the table schema to have keys or else duplicate records will be inserted. `upsert_distinct`: Inserts new records, including duplicates, then recreates the table and inserts *DISTINCT* records from old table. This is the least efficient approach but handles scenarios where there are no keys on table. `ignore`: Inserts new records into table using *INSERT IGNORE* clause.
- **`index` (`bool`)** – True to store the DataFrame index as a column in the table, otherwise False to ignore it.
- **`dtype` (`Dict[str, str]`, *optional*)** – Dictionary of columns names and MySQL types to be casted. Useful when you have columns with undetermined or mixed data types. (e.g. `{'col name': 'TEXT', 'col2 name': 'FLOAT'}`)
- **`varchar_lengths` (`Dict[str, int]`, *optional*)** – Dict of VARCHAR length by columns. (e.g. `{"col1": 10, "col5": 200}`).
- **`use_column_names` (`bool`)** – If set to True, will use the column names of the DataFrame for generating the INSERT SQL Query. E.g. If the DataFrame has two columns `col1` and `col3` and `use_column_names` is True, data will only be inserted into the database columns `col1` and `col3`.
- **`chunksize` (`int`)** – Number of rows which are inserted with each SQL query. Defaults to inserting 200 rows per query.

- **cursorclass** (*Cursor*) – Cursor class to use, e.g. `SSCrusor`; defaults to `pymysql.Cursor` <https://pymysql.readthedocs.io/en/latest/modules/cursors.html>

**Returns**

None.

**Return type**

None

**Examples**

Writing to MySQL using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.mysql.connect("MY_GLUE_CONNECTION")
>>> wr.mysql.to_sql(
...     df=df,
...     table="my_table",
...     schema="test",
...     con=con
... )
>>> con.close()
```

**Microsoft SQL Server**

<code>connect([connection, secret_id, catalog_id, ...])</code>	Return a pyodbc connection from a Glue Catalog Connection.
<code>read_sql_query()</code>	Return a DataFrame corresponding to the result set of the query string.
<code>read_sql_table()</code>	Return a DataFrame corresponding the table.
<code>to_sql(df, con, table, schema[, mode, ...])</code>	Write records stored in a DataFrame into Microsoft SQL Server.

**awswrangler.sqlserver.connect**

```
awswrangler.sqlserver.connect(connection: str | None = None, secret_id: str | None = None, catalog_id: str | None = None, dbname: str | None = None, odbc_driver_version: int = 17, boto3_session: Session | None = None, timeout: int | None = 0) → pyodbc.Connection
```

Return a pyodbc connection from a Glue Catalog Connection.

<https://github.com/mkleehammer/pyodbc>

**Note:** You MUST pass a `connection` OR `secret_id`. Here is an example of the secret structure in Secrets Manager: { “host”：“sqlserver-instance-wrangler.dr8vkeyrb9m1.us-east-1.rds.amazonaws.com”, “username”：“test”, “password”：“test”, “engine”：“sqlserver”, “port”：“1433”, “dbname”：“mydb” # Optional }

**Parameters**

- **connection** (*Optional [str]*) – Glue Catalog Connection name.

- **secret\_id** (*Optional[str]*) – Specifies the secret containing the connection details that you want to retrieve. You can specify either the Amazon Resource Name (ARN) or the friendly name of the secret.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog. If none is provided, the AWS account ID is used by default.
- **dbname** (*Optional[str]*) – Optional database name to overwrite the stored one.
- **odbc\_driver\_version** (*int*) – Major version of the OBDC Driver version that is installed and should be used.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **timeout** (*Optional[int]*) – This is the time in seconds before the connection to the server will time out. The default is None which means no timeout. This parameter is forwarded to pyodbc. <https://github.com/mkleehammer/pyodbc/wiki/The-pyodbc-Module#connect>

**Returns**

pyodbc connection.

**Return type**

pyodbc.Connection

**Examples**

```
>>> import awswrangler as wr
>>> con = wr.sqlserver.connect(connection="MY_GLUE_CONNECTION", odbc_driver_
    ↵version=17)
>>> with con.cursor() as cursor:
>>>     cursor.execute("SELECT 1")
>>>     print(cursor.fetchall())
>>> con.close()
```

**awswrangler.sqlserver.read\_sql\_query**

```
awswrangler.sqlserver.read_sql_query(sql: str, con: pyodbc.Connection, index_col: str | List[str] | None =
    ↵None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None =
    ↵None, chunksize: None = None, dtype: Dict[str, DataType] | None =
    ↵None, safe: bool = True, timestamp_as_object: bool = False) →
    DataFrame
```

```
awswrangler.sqlserver.read_sql_query(sql: str, con: pyodbc.Connection, *, index_col: str | List[str] | None =
    ↵None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None =
    ↵None, chunksize: int, dtype: Dict[str, DataType] | None = None,
    safe: bool = True, timestamp_as_object: bool = False) →
    Iterator[pd.DataFrame]
```

```
awswrangler.sqlserver.read_sql_query(sql: str, con: pyodbc.Connection, *, index_col: str | List[str] | None =
    ↵None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None =
    ↵None, chunksize: int | None, dtype: Dict[str, DataType] | None =
    ↵None, safe: bool = True, timestamp_as_object: bool = False) →
    pd.DataFrame | Iterator[pd.DataFrame]
```

Return a DataFrame corresponding to the result set of the query string.

**Parameters**

- **sql (str)** – SQL query.
- **con (pyodbc.Connection)** – Use pyodbc.connect() to use credentials directly or wr.sqlserver.connect() to fetch it from the Glue Catalog.
- **index\_col (Union[str, List[str]], optional)** – Column(s) to set as index(MultiIndex).
- **params (Union[List, Tuple, Dict], optional)** – List of parameters to pass to execute method. The syntax used to pass parameters is database driver dependent. Check your database driver documentation for which of the five syntax styles, described in PEP 249's paramstyle, is supported.
- **chunksize (int, optional)** – If specified, return an iterator where chunksize is the number of rows to include in each chunk.
- **dtype (Dict[str, pyarrow.DataType], optional)** – Specifying the datatype for columns. The keys should be the column names and the values should be the PyArrow types.
- **safe (bool)** – Check for overflows or other unsafe data type conversions.
- **timestamp\_as\_object (bool)** – Cast non-nanosecond timestamps (np.datetime64) to objects.

**Returns**

Result as Pandas DataFrame(s).

**Return type**

Union[pandas.DataFrame, Iterator[pandas.DataFrame]]

**Examples**

Reading from Microsoft SQL Server using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.sqlserver.connect(connection="MY_GLUE_CONNECTION", odbc_driver_
    ↪version=17)
>>> df = wr.sqlserver.read_sql_query(
...     sql="SELECT * FROM dbo.my_table",
...     con=con
... )
>>> con.close()
```

**awswrangler.sqlserver.read\_sql\_table**

`awswrangler.sqlserver.read_sql_table(table: str, con: pyodbc.Connection, schema: str | None = None, index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None = None, chunkszie: None = None, dtype: Dict[str, DataType] | None = None, safe: bool = True, timestamp_as_object: bool = False) → DataFrame`

`awswrangler.sqlserver.read_sql_table(table: str, con: pyodbc.Connection, *, schema: str | None = None, index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None = None, chunkszie: int, dtype: Dict[str, DataType] | None = None, safe: bool = True, timestamp_as_object: bool = False) → Iterator[pd.DataFrame]`

```
awswrangler.sqlserver.read_sql_table(table: str, con: pyodbc.Connection, *, schema: str | None = None,
                                      index_col: str | List[str] | None = None, params: List[Any] |
                                      Tuple[Any, ...] | Dict[Any, Any] | None = None, chunksize: int |
                                      None, dtype: Dict[str, pyarrow.DataType] | None = None, safe: bool = True,
                                      timestamp_as_object: bool = False) → pd.DataFrame |
                                      Iterator[pd.DataFrame]
```

Return a DataFrame corresponding the table.

#### Parameters

- **table** (*str*) – Table name.
- **con** (*pyodbc.Connection*) – Use `pyodbc.connect()` to use credentials directly or `wr.sqlserver.connect()` to fetch it from the Glue Catalog.
- **schema** (*str, optional*) – Name of SQL schema in database to query (if database flavor supports this). Uses default schema if `None` (default).
- **index\_col** (*Union[str, List[str]], optional*) – Column(s) to set as index(MultiIndex).
- **params** (*Union[List, Tuple, Dict], optional*) – List of parameters to pass to execute method. The syntax used to pass parameters is database driver dependent. Check your database driver documentation for which of the five syntax styles, described in PEP 249's paramstyle, is supported.
- **chunksize** (*int, optional*) – If specified, return an iterator where `chunksize` is the number of rows to include in each chunk.
- **dtype** (*Dict[str, pyarrow.DataType], optional*) – Specifying the datatype for columns. The keys should be the column names and the values should be the PyArrow types.
- **safe** (*bool*) – Check for overflows or other unsafe data type conversions.
- **timestamp\_as\_object** (*bool*) – Cast non-nanosecond timestamps (`np.datetime64`) to objects.

#### Returns

Result as Pandas DataFrame(s).

#### Return type

`Union[pandas.DataFrame, Iterator[pandas.DataFrame]]`

## Examples

Reading from Microsoft SQL Server using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.sqlserver.connect(connection="MY_GLUE_CONNECTION", odbc_driver_
    ↪version=17)
>>> df = wr.sqlserver.read_sql_table(
...     table="my_table",
...     schema="dbo",
...     con=con
... )
>>> con.close()
```

## `awswrangler.sqlserver.to_sql`

```
awswrangler.sqlserver.to_sql(df: DataFrame, con: pyodbc.Connection, table: str, schema: str, mode: Literal['append', 'overwrite'] = 'append', index: bool = False, dtype: Dict[str, str] | None = None, varchar_lengths: Dict[str, int] | None = None, use_column_names: bool = False, chunksize: int = 200, fast_executemany: bool = False) → None
```

Write records stored in a DataFrame into Microsoft SQL Server.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `chunksize`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- **`df` (pandas.DataFrame)** – Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>
- **`con` (pyodbc.Connection)** – Use `pyodbc.connect()` to use credentials directly or `wr.sqlserver.connect()` to fetch it from the Glue Catalog.
- **`table` (str)** – Table name
- **`schema` (str)** – Schema name
- **`mode` (str)** – Append or overwrite.
- **`index` (bool)** – True to store the DataFrame index as a column in the table, otherwise False to ignore it.
- **`dtype` (Dict[str, str], optional)** – Dictionary of columns names and Microsoft SQL Server types to be casted. Useful when you have columns with undetermined or mixed data types. (e.g. {'col name': 'TEXT', 'col2 name': 'FLOAT'})
- **`varchar_lengths` (Dict[str, int], optional)** – Dict of VARCHAR length by columns. (e.g. {"col1": 10, "col5": 200}).
- **`use_column_names` (bool)** – If set to True, will use the column names of the DataFrame for generating the INSERT SQL Query. E.g. If the DataFrame has two columns `col1` and `col3` and `use_column_names` is True, data will only be inserted into the database columns `col1` and `col3`.
- **`chunksize` (int)** – Number of rows which are inserted with each SQL query. Defaults to inserting 200 rows per query.
- **`fast_executemany` (bool)** – Mode of execution which greatly reduces round trips for a DBAPI `executemany()` call when using Microsoft ODBC drivers, for limited size batches that fit in memory. *False* by default.

[https://github.com/mkleehammer/pyodbc/wiki/Cursor#executemany-params-with-fast\\_executemanytrue](https://github.com/mkleehammer/pyodbc/wiki/Cursor#executemany-params-with-fast_executemanytrue)

Note: when using this mode, pyodbc converts the Python parameter values to their ODBC “C” equivalents, based on the target column types in the database which may lead to subtle data type conversion differences depending on whether `fast_executemany` is True or False.

**Returns**

None.

**Return type**

None

**Examples**

Writing to Microsoft SQL Server using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.sqlserver.connect(connection="MY_GLUE_CONNECTION", odbc_driver_
>>>     version=17)
>>> wr.sqlserver.to_sql(
...     df=df,
...     table="table",
...     schema="dbo",
...     con=con
... )
>>> con.close()
```

**Oracle**

<code>connect([connection, secret_id, catalog_id, ...])</code>	Return a oracledb connection from a Glue Catalog Connection.
<code>read_sql_query()</code>	Return a DataFrame corresponding to the result set of the query string.
<code>read_sql_table()</code>	Return a DataFrame corresponding the table.
<code>to_sql(df, con, table, schema[, mode, ...])</code>	Write records stored in a DataFrame into Oracle Database.

**awswrangler.oracle.connect**

```
awswrangler.oracle.connect(connection: str | None = None, secret_id: str | None = None, catalog_id: str |
    None = None, dbname: str | None = None, boto3_session: Session | None =
    None, call_timeout: int | None = 0) → oracledb.Connection
```

Return a oracledb connection from a Glue Catalog Connection.

<https://github.com/oracle/python-oracledb>

---

**Note:** You MUST pass a `connection` OR `secret_id`. Here is an example of the secret structure in Secrets Manager: { “host”：“oracle-instance-wrangler.cr4trvg8rz.us-east-1.rds.amazonaws.com”, “username”：“test”, “password”：“test”, “engine”：“oracle”, “port”：“1521”, “dbname”：“mydb” # Optional }

---

**Parameters**

- **connection** (*Optional [str]*) – Glue Catalog Connection name.

- **secret\_id** (*Optional[str]*) – Specifies the secret containing the connection details that you want to retrieve. You can specify either the Amazon Resource Name (ARN) or the friendly name of the secret.
- **catalog\_id** (*str, optional*) – The ID of the Data Catalog. If none is provided, the AWS account ID is used by default.
- **dbname** (*Optional[str]*) – Optional database name to overwrite the stored one.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **call\_timeout** (*Optional[int]*) – This is the time in milliseconds that a single round-trip to the database may take before a timeout will occur. The default is None which means no timeout. This parameter is forwarded to oracledb. [https://cx-oracle.readthedocs.io/en/latest/api\\_manual/connection.html#Connection.call\\_timeout](https://cx-oracle.readthedocs.io/en/latest/api_manual/connection.html#Connection.call_timeout)

**Returns**

oracledb connection.

**Return type**

oracledb.Connection

**Examples**

```
>>> import awswrangler as wr
>>> con = wr.oracle.connect(connection="MY_GLUE_CONNECTION")
>>> with con.cursor() as cursor:
>>>     cursor.execute("SELECT 1 FROM DUAL")
>>>     print(cursor.fetchall())
>>> con.close()
```

**awswrangler.oracle.read\_sql\_query**

```
awswrangler.oracle.read_sql_query(sql: str, con: oracledb.Connection, index_col: str | List[str] | None =
    None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None =
    None, chunksize: None = None, dtype: Dict[str, DataType] | None =
    None, safe: bool = True, timestamp_as_object: bool = False) →
    DataFrame

awswrangler.oracle.read_sql_query(sql: str, con: oracledb.Connection, *, index_col: str | List[str] | None =
    None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None =
    None, chunksize: int, dtype: Dict[str, DataType] | None = None, safe:
    bool = True, timestamp_as_object: bool = False) →
    Iterator[pd.DataFrame]

awswrangler.oracle.read_sql_query(sql: str, con: oracledb.Connection, *, index_col: str | List[str] | None =
    None, params: List[Any] | Tuple[Any, ...] | Dict[Any, Any] | None =
    None, chunksize: int | None, dtype: Dict[str, DataType] | None = None,
    safe: bool = True, timestamp_as_object: bool = False) →
    pd.DataFrame | Iterator[pd.DataFrame]
```

Return a DataFrame corresponding to the result set of the query string.

**Parameters**

- **sql** (*str*) – SQL query.

- **con** (`oracledb.Connection`) – Use `oracledb.connect()` to use credentials directly or `wr.oracle.connect()` to fetch it from the Glue Catalog.
- **index\_col** (`Union[str, List[str]]`, *optional*) – Column(s) to set as index(`MultiIndex`).
- **params** (`Union[List, Tuple, Dict]`, *optional*) – List of parameters to pass to execute method. The syntax used to pass parameters is database driver dependent. Check your database driver documentation for which of the five syntax styles, described in PEP 249's `paramstyle`, is supported.
- **chunksize** (`int`, *optional*) – If specified, return an iterator where `chunksize` is the number of rows to include in each chunk.
- **dtype** (`Dict[str, pyarrow.DataType]`, *optional*) – Specifying the datatype for columns. The keys should be the column names and the values should be the PyArrow types.
- **safe** (`bool`) – Check for overflows or other unsafe data type conversions.
- **timestamp\_as\_object** (`bool`) – Cast non-nanosecond timestamps (`np.datetime64`) to objects.

**Returns**

Result as Pandas DataFrame(s).

**Return type**

`Union[pandas.DataFrame, Iterator[pandas.DataFrame]]`

## Examples

Reading from Oracle Database using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.oracle.connect(connection="MY_GLUE_CONNECTION")
>>> df = wr.oracle.read_sql_query(
...     sql="SELECT * FROM test.my_table",
...     con=con
... )
>>> con.close()
```

## awswrangler.oracle.read\_sql\_table

```
awswrangler.oracle.read_sql_table(table: str, con: oracledb.Connection, schema: str | None = None,
                                    index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any,
... ] | Dict[Any, Any] | None = None, chunkszie: None = None, dtype:
Dict[str, DataType] | None = None, safe: bool = True,
                                    timestamp_as_object: bool = False) → DataFrame

awswrangler.oracle.read_sql_table(table: str, con: oracledb.Connection, *, schema: str | None = None,
                                    index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any,
... ] | Dict[Any, Any] | None = None, chunkszie: int, dtype: Dict[str,
(DataType] | None = None, safe: bool = True, timestamp_as_object: bool
= False) → Iterator[pd.DataFrame]
```

```
awswrangler.oracle.read_sql_table(table: str, con: oracledb.Connection, *, schema: str | None = None,
                                    index_col: str | List[str] | None = None, params: List[Any] | Tuple[Any],
                                    ... | Dict[Any, Any] | None = None, chunksize: int | None, dtype:
                                    Dict[str, pyarrow.DataType] | None = None, safe: bool = True,
                                    timestamp_as_object: bool = False) → pd.DataFrame |
                                    Iterator[pd.DataFrame]
```

Return a DataFrame corresponding the table.

#### Parameters

- **table (str)** – Table name.
- **con (oracledb.Connection)** – Use oracledb.connect() to use credentials directly or wr.oracle.connect() to fetch it from the Glue Catalog.
- **schema (str, optional)** – Name of SQL schema in database to query (if database flavor supports this). Uses default schema if None (default).
- **index\_col (Union[str, List[str]], optional)** – Column(s) to set as index(MultiIndex).
- **params (Union[List, Tuple, Dict], optional)** – List of parameters to pass to execute method. The syntax used to pass parameters is database driver dependent. Check your database driver documentation for which of the five syntax styles, described in PEP 249's paramstyle, is supported.
- **chunksize (int, optional)** – If specified, return an iterator where chunksize is the number of rows to include in each chunk.
- **dtype (Dict[str, pyarrow.DataType], optional)** – Specifying the datatype for columns. The keys should be the column names and the values should be the PyArrow types.
- **safe (bool)** – Check for overflows or other unsafe data type conversions.
- **timestamp\_as\_object (bool)** – Cast non-nanosecond timestamps (np.datetime64) to objects.

#### Returns

Result as Pandas DataFrame(s).

#### Return type

Union[pandas.DataFrame, Iterator[pandas.DataFrame]]

## Examples

Reading from Oracle Database using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.oracle.connect(connection="MY_GLUE_CONNECTION")
>>> df = wr.oracle.read_sql_table(
...     table="my_table",
...     schema="test",
...     con=con
... )
>>> con.close()
```

## awswrangler.oracle.to\_sql

```
awswrangler.oracle.to_sql(df: DataFrame, con: oracledb.Connection, table: str, schema: str, mode:  
    Literal['append', 'overwrite'] = 'append', index: bool = False, dtype: Dict[str, str] |  
    None = None, varchar_lengths: Dict[str, int] | None = None, use_column_names:  
    bool = False, chunksize: int = 200) → None
```

Write records stored in a DataFrame into Oracle Database.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `chunksize`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- **df** (`pandas.DataFrame`) – Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>
- **con** (`oracledb.Connection`) – Use `oracledb.connect()` to use credentials directly or `wr.oracle.connect()` to fetch it from the Glue Catalog.
- **table** (`str`) – Table name
- **schema** (`str`) – Schema name
- **mode** (`str`) – Append or overwrite.
- **index** (`bool`) – True to store the DataFrame index as a column in the table, otherwise False to ignore it.
- **dtype** (`Dict[str, str], optional`) – Dictionary of columns names and Oracle types to be casted. Useful when you have columns with undetermined or mixed data types. (e.g. `{'col name': 'TEXT', 'col2 name': 'FLOAT'}`)
- **varchar\_lengths** (`Dict[str, int], optional`) – Dict of VARCHAR length by columns. (e.g. `{"col1": 10, "col5": 200}`).
- **use\_column\_names** (`bool`) – If set to True, will use the column names of the DataFrame for generating the INSERT SQL Query. E.g. If the DataFrame has two columns `col1` and `col3` and `use_column_names` is True, data will only be inserted into the database columns `col1` and `col3`.
- **chunksize** (`int`) – Number of rows which are inserted with each SQL query. Defaults to inserting 200 rows per query.

### Returns

None.

### Return type

None

## Examples

Writing to Oracle Database using a Glue Catalog Connections

```
>>> import awswrangler as wr
>>> con = wr.oracle.connect(connection="MY_GLUE_CONNECTION")
>>> wr.oracle.to_sql(
...     df=df,
...     table="table",
...     schema="ORCL",
...     con=con
... )
>>> con.close()
```

### 1.9.8 Data API Redshift

<code>RedshiftDataApi([cluster_id, database, ...])</code>	Provides access to a Redshift cluster via the Data API.
<code>connect([cluster_id, database, ...])</code>	Create a Redshift Data API connection.
<code>read_sql_query(sql, con[, database])</code>	Run an SQL query on a RedshiftDataApi connection and return the result as a DataFrame.

#### awswrangler.data\_api.redshift.RedshiftDataApi

```
class awswrangler.data_api.redshift.RedshiftDataApi(cluster_id: str = "", database: str = "",
                                                     workgroup_name: str = "", secret_arn: str = "",
                                                     db_user: str = "", sleep: float = 0.25, backoff: float = 1.5, retries: int = 15, boto3_session: Session | None = None)
```

Provides access to a Redshift cluster via the Data API.

---

**Note:** When connecting to a standard Redshift cluster, `cluster_id` is used. When connecting to Redshift Serverless, `workgroup_name` is used. These two arguments are mutually exclusive.

---

#### Parameters

- **cluster\_id (str)** – Id for the target Redshift cluster - only required if `workgroup_name` not provided.
- **database (str)** – Target database name.
- **workgroup\_name (str)** – Name for the target serverless Redshift workgroup - only required if `cluster_id` not provided.
- **secret\_arn (str)** – The ARN for the secret to be used for authentication - only required if `db_user` not provided.
- **db\_user (str)** – The database user to generate temporary credentials for - only required if `secret_arn` not provided.
- **sleep (float)** – Number of seconds to sleep between result fetch attempts - defaults to 0.25.

- **backoff** (*float*) – Factor by which to increase the sleep between result fetch attempts - defaults to 1.5.
- **retries** (*int*) – Maximum number of result fetch attempts - defaults to 15.
- **boto3\_session** (*boto3.Session()*, *optional*) – The boto3 session. If *None*, the default boto3 session is used.

**`__init__(cluster_id: str = "", database: str = "", workgroup_name: str = "", secret_arn: str = "", db_user: str = "", sleep: float = 0.25, backoff: float = 1.5, retries: int = 15, boto3_session: Session | None = None) → None`**

## Methods

---

**`__init__([cluster_id, database, ...])`**

**`execute(sql[, database])`** Execute SQL statement against a Data API Service.

---

### **awswrangler.data\_api.redshift.connect**

**`awswrangler.data_api.redshift.connect(cluster_id: str = "", database: str = "", workgroup_name: str = "", secret_arn: str = "", db_user: str = "", boto3_session: Session | None = None, **kwargs: Any) → RedshiftDataApi`**

Create a Redshift Data API connection.

---

**Note:** When connecting to a standard Redshift cluster, *cluster\_id* is used. When connecting to Redshift Serverless, *workgroup\_name* is used. These two arguments are mutually exclusive.

---

#### Parameters

- **cluster\_id** (*str*) – Id for the target Redshift cluster - only required if *workgroup\_name* not provided.
- **database** (*str*) – Target database name.
- **workgroup\_name** (*str*) – Name for the target serverless Redshift workgroup - only required if *cluster\_id* not provided.
- **secret\_arn** (*str*) – The ARN for the secret to be used for authentication - only required if *db\_user* not provided.
- **db\_user** (*str*) – The database user to generate temporary credentials for - only required if *secret\_arn* not provided.
- **boto3\_session** (*boto3.Session()*, *optional*) – The boto3 session. If *None*, the default boto3 session is used.
- **\*\*kwargs** – Any additional kwargs are passed to the underlying RedshiftDataApi class.

#### Return type

A RedshiftDataApi connection instance that can be used with `wr.redshift.data_api.read_sql_query`.

**awswrangler.data\_api.redshift.read\_sql\_query**

```
awswrangler.data_api.redshift.read_sql_query(sql: str, con: RedshiftDataApi, database: str | None = None) → DataFrame
```

Run an SQL query on a RedshiftDataApi connection and return the result as a DataFrame.

**Parameters**

- **sql (str)** – SQL query to run.
- **con (RedshiftDataApi)** – A RedshiftDataApi connection instance
- **database (str)** – Database to run query on - defaults to the database specified by *con*.

**Return type**

A Pandas DataFrame containing the query results.

**1.9.9 Data API RDS**

<code>RdsDataApi(resource_arn, database[, ...])</code>	Provides access to the RDS Data API.
<code>connect(resource_arn, database[, ...])</code>	Create a RDS Data API connection.
<code>read_sql_query(sql, con[, database])</code>	Run an SQL query on an RdsDataApi connection and return the result as a DataFrame.

**awswrangler.data\_api.rds.RdsDataApi**

```
class awswrangler.data_api.rds.RdsDataApi(resource_arn: str, database: str, secret_arn: str = "", sleep: float = 0.5, backoff: float = 1.0, retries: int = 30, boto3_session: Session | None = None)
```

Provides access to the RDS Data API.

**Parameters**

- **resource\_arn (str)** – ARN for the RDS resource.
- **database (str)** – Target database name.
- **secret\_arn (str)** – The ARN for the secret to be used for authentication.
- **sleep (float)** – Number of seconds to sleep between connection attempts to paused clusters - defaults to 0.5.
- **backoff (float)** – Factor by which to increase the sleep between connection attempts to paused clusters - defaults to 1.0.
- **retries (int)** – Maximum number of connection attempts to paused clusters - defaults to 10.
- **boto3\_session (boto3.Session(), optional)** – The boto3 session. If *None*, the default boto3 session is used.

```
__init__(resource_arn: str, database: str, secret_arn: str = "", sleep: float = 0.5, backoff: float = 1.0, retries: int = 30, boto3_session: Session | None = None) → None
```

## Methods

<code>__init__(resource_arn, database[, ...])</code>	
<code>execute(sql[, database])</code>	Execute SQL statement against a Data API Service.

### `awswrangler.data_api.rds.connect`

`awswrangler.data_api.rds.connect(resource_arn: str, database: str, secret_arn: str = "", boto3_session: Session | None = None, **kwargs: Any) → RdsDataApi`

Create a RDS Data API connection.

#### Parameters

- **resource\_arn** (*str*) – ARN for the RDS resource.
- **database** (*str*) – Target database name.
- **secret\_arn** (*str*) – The ARN for the secret to be used for authentication.
- **boto3\_session** (*boto3.Session()*, *optional*) – The boto3 session. If *None*, the default boto3 session is used.
- **\*\*kwargs** – Any additional kwargs are passed to the underlying RdsDataApi class.

#### Return type

A RdsDataApi connection instance that can be used with `wr.rds.data_api.read_sql_query`.

### `awswrangler.data_api.rds.read_sql_query`

`awswrangler.data_api.rds.read_sql_query(sql: str, con: RdsDataApi, database: str | None = None) → DataFrame`

Run an SQL query on an RdsDataApi connection and return the result as a DataFrame.

#### Parameters

- **sql** (*str*) – SQL query to run.
- **con** (*RdsDataApi*) – A RdsDataApi connection instance
- **database** (*str*) – Database to run query on - defaults to the database specified by *con*.

#### Return type

A Pandas DataFrame containing the query results.

## 1.9.10 AWS Glue Data Quality

<code>create_recommendation_ruleset(database, ...)</code>	Create recommendation Data Quality ruleset.
<code>create_ruleset(name, database, table[, ...])</code>	Create Data Quality ruleset.
<code>evaluate_ruleset(name, iam_role_arn[, ...])</code>	Evaluate Data Quality ruleset.
<code>get_ruleset(name[, boto3_session])</code>	Get a Data Quality ruleset.
<code>update_ruleset(name[, mode, df_rules, ...])</code>	Update Data Quality ruleset.

## `awswrangler.data_quality.create_recommendation_ruleset`

```
awswrangler.data_quality.create_recommendation_ruleset(database: str, table: str, iam_role_arn: str,
                                                       name: str | None = None, catalog_id: str | None = None, connection_name: str | None = None, additional_options: Dict[str, Any] | None = None, number_of_workers: int = 5, timeout: int = 2880, client_token: str | None = None, boto3_session: Session | None = None) → DataFrame
```

Create recommendation Data Quality ruleset.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- `database` (`str`) – Glue database name.
- `table` (`str`) – Glue table name.
- `iam_role_arn` (`str`) – IAM Role ARN.
- `name` (`str, optional`) – Ruleset name.
- `catalog_id` (`str, optional`) – Glue Catalog id.
- `connection_name` (`str, optional`) – Glue connection name.
- `additional_options` (`dict, optional`) – Additional options for the table. Supported keys: `pushDownPredicate`: to filter on partitions without having to list and read all the files in your dataset. `catalogPartitionPredicate`: to use server-side partition pruning using partition indexes in the Glue Data Catalog.
- `number_of_workers` (`int, optional`) – The number of G.1X workers to be used in the run. The default is 5.
- `timeout` (`int, optional`) – The timeout for a run in minutes. The default is 2880 (48 hours).
- `client_token` (`str, optional`) – Random id used for idempotency. Is automatically generated if not provided.
- `boto3_session` (`boto3.Session, optional`) – Boto3 Session. If none, the default boto3 session is used.

### Returns

Data frame with recommended ruleset details.

### Return type

`pd.DataFrame`

## Examples

```
>>> import awswrangler as wr

>>> df_recommended_ruleset = wr.data_quality.create_recommendation_ruleset(
>>>     database="database",
>>>     table="table",
>>>     iam_role_arn="arn:...",
>>> )
```

### awswrangler.data\_quality.create\_ruleset

```
awswrangler.data_quality.create_ruleset(name: str, database: str, table: str, df_rules: DataFrame | None
                                         = None, dqdl_rules: str | None = None, description: str = '',
                                         client_token: str | None = None, boto3_session: Session | None
                                         = None) → None
```

Create Data Quality ruleset.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

#### Parameters

- `name (str)` – Ruleset name.
- `database (str)` – Glue database name.
- `table (str)` – Glue table name.
- `df_rules (str, optional)` – Data frame with `rule_type`, `parameter`, and `expression` columns.
- `dqdl_rules (str, optional)` – Data Quality Definition Language definition.
- `description (str)` – Ruleset description.
- `client_token (str, optional)` – Random id used for idempotency. Is automatically generated if not provided.
- `boto3_session (boto3.Session, optional)` – Boto3 Session. If none, the default boto3 session is used.

## Examples

```
>>> import awswrangler as wr
>>> import pandas as pd
>>>
>>> df = pd.DataFrame({"c0": [0, 1, 2], "c1": [0, 1, 2], "c2": [0, 0, 1]})
>>> wr.s3.to_parquet(df, path, dataset=True, database="database", table="table")
>>> wr.data_quality.create_ruleset(
>>>     name="ruleset",
>>>     database="database",
>>>     table="table",
>>>     dqdl_rules="Rules = [ RowCount between 1 and 3 ]",
>>> )
>>>
```

```
>>> import awswrangler as wr
>>> import pandas as pd
>>>
>>> df = pd.DataFrame({"c0": [0, 1, 2], "c1": [0, 1, 2], "c2": [0, 0, 1]})
>>> df_rules = pd.DataFrame({
>>>     "rule_type": ["RowCount", "IsComplete", "Uniqueness"],
>>>     "parameter": [None, '"c0"', '"c0"'],
>>>     "expression": ["between 1 and 6", None, "> 0.95"],
>>> })
>>> wr.s3.to_parquet(df, path, dataset=True, database="database", table="table")
>>> wr.data_quality.create_ruleset(
>>>     name="ruleset",
>>>     database="database",
>>>     table="table",
>>>     df_rules=df_rules,
>>> )
>>>
```

### awswrangler.data\_quality.evaluate\_ruleset

`awswrangler.data_quality.evaluate_ruleset(name: str | List[str], iam_role_arn: str, number_of_workers: int = 5, timeout: int = 2880, database: str | None = None, table: str | None = None, catalog_id: str | None = None, connection_name: str | None = None, additional_options: Dict[str, str] | None = None, additional_run_options: Dict[str, bool | str] | None = None, client_token: str | None = None, boto3_session: Session | None = None) → DataFrame`

Evaluate Data Quality ruleset.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `catalog_id`
- `database`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- **name** (*str or list[str]*) – Ruleset name or list of names.
- **iam\_role\_arn** (*str*) – IAM Role ARN.
- **number\_of\_workers** (*int, optional*) – The number of G.1X workers to be used in the run. The default is 5.
- **timeout** (*int, optional*) – The timeout for a run in minutes. The default is 2880 (48 hours).
- **database** (*str, optional*) – Glue database name. Database associated with the ruleset will be used if not provided.
- **table** (*str, optional*) – Glue table name. Table associated with the ruleset will be used if not provided.
- **catalog\_id** (*str, optional*) – Glue Catalog id.
- **connection\_name** (*str, optional*) – Glue connection name.
- **additional\_options** (*dict, optional*) – Additional options for the table. Supported keys: *pushDownPredicate*: to filter on partitions without having to list and read all the files in your dataset. *catalogPartitionPredicate*: to use server-side partition pruning using partition indexes in the Glue Data Catalog.
- **additional\_run\_options** (*Dict[str, Union[str, bool]], optional*) – Additional run options. Supported keys: *CloudWatchMetricsEnabled*: whether to enable Cloud-Watch metrics. *ResultsS3Prefix*: prefix for Amazon S3 to store results.
- **client\_token** (*str, optional*) – Random id used for idempotency. Will be automatically generated if not provided.
- **boto3\_session** (*boto3.Session, optional*) – Boto3 Session. If none, the default boto3 session is used.

**Returns**

Data frame with ruleset evaluation results.

**Return type**

`pd.DataFrame`

**Examples**

```
>>> import awswrangler as wr
>>> import pandas as pd
>>>
>>> df = pd.DataFrame({"c0": [0, 1, 2], "c1": [0, 1, 2], "c2": [0, 0, 1]})
>>> wr.s3.to_parquet(df, path, dataset=True, database="database", table="table")
>>> wr.data_quality.create_ruleset(
>>>     name="ruleset",
>>>     database="database",
>>>     table="table",
>>>     dqdl_rules="Rules = [ RowCount between 1 and 3 ]",
>>> )
>>> df_ruleset_results = wr.data_quality.evaluate_ruleset(
>>>     name="ruleset",
>>>     iam_role_arn=glue_data_quality_role,
>>> )
```

## `awswrangler.data_quality.get_ruleset`

`awswrangler.data_quality.get_ruleset(name: str | List[str], boto3_session: Session | None = None) → DataFrame`

Get a Data Quality ruleset.

### Parameters

- **name** (*str or list[str]*) – Ruleset name or list of names.
- **boto3\_session** (*boto3.Session, optional*) – Boto3 Session. If none, the default boto3 session is used.

### Returns

Data frame with ruleset(s) details.

### Return type

`pd.DataFrame`

## Examples

Get single ruleset >>> import awswrangler as wr

```
>>> df_ruleset = wr.data_quality.get_ruleset(name="my_ruleset")
```

Get multiple rulesets. A column with the ruleset name is added to the data frame >>> df\_rulesets = wr.data\_quality.get\_ruleset(name=["ruleset\_1", "ruleset\_2"])

## `awswrangler.data_quality.update_ruleset`

`awswrangler.data_quality.update_ruleset(name: str, mode: Literal['overwrite', 'upsert'] = 'overwrite', df_rules: DataFrame | None = None, dqdl_rules: str | None = None, description: str = "", boto3_session: Session | None = None) → None`

Update Data Quality ruleset.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

---

Check out the [Global Configurations Tutorial](#) for details.

### Parameters

- **name** (*str*) – Ruleset name.
- **mode** (*str*) – overwrite (default) or upsert.
- **df\_rules** (*str, optional*) – Data frame with *rule\_type*, *parameter*, and *expression* columns.
- **dqdl\_rules** (*str, optional*) – Data Quality Definition Language definition.
- **description** (*str*) – Ruleset description.
- **boto3\_session** (*boto3.Session, optional*) – Boto3 Session. If none, the default boto3 session is used.

## Examples

```
Overwrite rules in the existing ruleset. >>> wr.data_quality.update_ruleset( >>> name="ruleset", >>> dqdl_rules="Rules = [ RowCount between 1 and 3 ]", >>>)
```

```
Update or insert rules in the existing ruleset. >>> wr.data_quality.update_ruleset( >>> name="ruleset", >>> mode="insert", >>> dqdl_rules="Rules = [ RowCount between 1 and 3 ]", >>>)
```

## 1.9.11 OpenSearch

<code>connect(host[, port, boto3_session, region, ...])</code>	Create a secure connection to the specified Amazon OpenSearch domain.
<code>create_collection(name[, collection_type, ...])</code>	Create Amazon OpenSearch Serverless collection.
<code>create_index(client, index[, doc_type, ...])</code>	Create an index.
<code>delete_index(client, index)</code>	Delete an index.
<code>index_csv(client, path, index[, doc_type, ...])</code>	Index all documents from a CSV file to OpenSearch index.
<code>index_documents(client, documents, index[, ...])</code>	Index all documents to OpenSearch index.
<code>index_df(client, df, index[, doc_type])</code>	Index all documents from a DataFrame to OpenSearch index.
<code>index_json(client, path, index[, doc_type, ...])</code>	Index all documents from JSON file to OpenSearch index.
<code>search(client[, index, search_body, ...])</code>	Return results matching query DSL as pandas DataFrame.
<code>search_by_sql(client, sql_query, **kwargs)</code>	Return results matching SQL query as pandas DataFrame.

### awswrangler.opensearch.connect

```
awswrangler.opensearch.connect(host: str, port: int | None = 443, boto3_session: Session | None = None,  
                                region: str | None = None, username: str | None = None, password: str |  
                                None = None, service: str | None = None, timeout: int = 30, max_retries: int  
                                = 5, retry_on_timeout: bool = True, retry_on_status: Sequence[int] | None  
                                = None) → opensearchpy.OpenSearch
```

Create a secure connection to the specified Amazon OpenSearch domain.

---

**Note:** We use `opensearch-py`, an OpenSearch python client.

The username and password are mandatory if the OS Cluster uses [Fine Grained Access Control](#). If fine grained access control is disabled, session access key and secret keys are used.

---

### Parameters

- **host** (`str`) – Amazon OpenSearch domain, for example: `my-test-domain.us-east-1.es.amazonaws.com`.
- **port** (`int`) – OpenSearch Service only accepts connections over port 80 (HTTP) or 443 (HTTPS)
- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 Session will be used if boto3\_session receive None.

- **region** (*str, optional*) – AWS region of the Amazon OS domain. If not provided will be extracted from boto3\_session.
- **username** (*str, optional*) – Fine-grained access control username. Mandatory if OS Cluster uses Fine Grained Access Control.
- **password** (*str, optional*) – Fine-grained access control password. Mandatory if OS Cluster uses Fine Grained Access Control.
- **service** (*str, optional*) – Service id. Supported values are *es*, corresponding to opensearch cluster, and *aoss* for serverless opensearch. By default, service will be parsed from the host URI.
- **timeout** (*int*) – Operation timeout. *30* by default.
- **max\_retries** (*int*) – Maximum number of retries before an exception is propagated. *10* by default.
- **retry\_on\_timeout** (*bool*) – Should timeout trigger a retry on different node. *True* by default.
- **retry\_on\_status** (*List[int], optional*) – Set of HTTP status codes on which we should retry on a different node. Defaults to [500, 502, 503, 504].

**Returns**

OpenSearch low-level client. [https://github.com/opensearch-project/opensearch-py/blob/main/opensearchpy/client/\\_\\_init\\_\\_.py](https://github.com/opensearch-project/opensearch-py/blob/main/opensearchpy/client/__init__.py)

**Return type**

`opensearchpy.OpenSearch`

**awswrangler.opensearch.create\_collection**

```
awswrangler.opensearch.create_collection(name: str, collection_type: str = 'SEARCH', description: str = "", encryption_policy: Dict[str, Any] | List[Dict[str, Any]] | None = None, kms_key_arn: str | None = None, network_policy: Dict[str, Any] | List[Dict[str, Any]] | None = None, vpc_endpoints: List[str] | None = None, data_policy: List[Dict[str, Any]] | None = None, boto3_session: Session | None = None) → Dict[str, Any]
```

Create Amazon OpenSearch Serverless collection.

Creates Amazon OpenSearch Serverless collection, corresponding encryption and network policies, and data policy, if *data\_policy* provided.

More in [Amazon OpenSearch Serverless (preview)] (<https://docs.aws.amazon.com/opensearch-service/latest/developerguide/serverless.html>)

**Warning:** This API is experimental and may change in future AWS SDK for Pandas releases.

**Parameters**

- **name** (*str*) – Collection name.
- **collection\_type** (*str*) – Collection type. Allowed values are *SEARCH*, and *TIME-SERIES*.
- **description** (*str*) – Collection description.

- **encryption\_policy** (*Union[Dict[str, Any], List[Dict[str, Any]]]*, *optional*) – Encryption policy of a form: { “Rules”: [...] }

If not provided, default policy using AWS-managed KMS key will be created. To use user-defined key, provide *kms\_key\_arn*.

- **kms\_key\_arn** (*str*, *optional*) – Encryption key.

- **network\_policy** (*Union[Dict[str, Any], List[Dict[str, Any]]]*, *optional*) – Network policy of a form: [{ “Rules”: [...] }]

If not provided, default network policy allowing public access to the collection will be created. To create the collection in the VPC, provide *vpc\_endpoints*.

- **vpc\_endpoints** (*List[str]*, *optional*) – List of VPC endpoints for access to non-public collection.

- **data\_policy** (*Union[Dict[str, Any], List[Dict[str, Any]]]*, *optional*) – Data policy of a form: [{ “Rules”: [...] }]

- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 Session will be used if *boto3\_session* receive None.

#### Returns

**Collection details** – Collection details

#### Return type

*Dict[str, Any]*

## awswrangler.opensearch.create\_index

```
awswrangler.opensearch.create_index(client: opensearchpy.OpenSearch, index: str, doc_type: str | None = None, settings: Dict[str, Any] | None = None, mappings: Dict[str, Any] | None = None) → Dict[str, Any]
```

Create an index.

#### Parameters

- **client** (*OpenSearch*) – instance of *opensearchpy.OpenSearch* to use.
- **index** (*str*) – Name of the index.
- **doc\_type** (*str, optional*) – Name of the document type (for Elasticsearch versions 5.x and earlier).
- **settings** (*Dict[str, Any], optional*) – Index settings <https://opensearch.org/docs/opensearch/rest-api/create-index/#index-settings>
- **mappings** (*Dict[str, Any], optional*) – Index mappings <https://opensearch.org/docs/opensearch/rest-api/create-index/#mappings>

#### Returns

OpenSearch rest api response <https://opensearch.org/docs/opensearch/rest-api/create-index/#response>.

#### Return type

*Dict[str, Any]*

## Examples

Creating an index.

```
>>> import awswrangler as wr
>>> client = wr.opensearch.connect(host='DOMAIN-ENDPOINT')
>>> response = wr.opensearch.create_index(
...     client=client,
...     index="sample-index1",
...     mappings={
...         "properties": {
...             "age": { "type" : "integer" }
...         }
...     },
...     settings={
...         "index": {
...             "number_of_shards": 2,
...             "number_of_replicas": 1
...         }
...     }
... )
```

## awswrangler.opensearch.delete\_index

`awswrangler.opensearch.delete_index(client: opensearchpy.OpenSearch, index: str) → Dict[str, Any]`

Delete an index.

### Parameters

- **client** (*OpenSearch*) – instance of `opensearchpy.OpenSearch` to use.
- **index** (*str*) – Name of the index.

### Returns

OpenSearch rest api response

### Return type

`Dict[str, Any]`

## Examples

Deleting an index.

```
>>> import awswrangler as wr
>>> client = wr.opensearch.connect(host='DOMAIN-ENDPOINT')
>>> response = wr.opensearch.delete_index(
...     client=client,
...     index="sample-index1"
... )
```

## awswrangler.opensearch.index\_csv

```
awswrangler.opensearch.index_csv(client: opensearchpy.OpenSearch, path: str, index: str, doc_type: str | None = None, pandas_kwargs: Dict[str, Any] | None = None, **kwargs: Any) → Any
```

Index all documents from a CSV file to OpenSearch index.

### Parameters

- **client** (*OpenSearch*) – instance of opensearchpy.OpenSearch to use.
- **path** (*str*) – s3 or local path to the CSV file which contains the documents.
- **index** (*str*) – Name of the index.
- **doc\_type** (*str, optional*) – Name of the document type (for Elasticsearch versions 5.x and earlier).
- **pandas\_kwargs** (*Dict[str, Any], optional*) – Dictionary of arguments forwarded to pandas.read\_csv(). e.g. pandas\_kwargs={‘sep’: ‘|’, ‘na\_values’: [‘null’, ‘none’]} [https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read\\_csv.html](https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read_csv.html) Note: these params values are enforced: *skip\_blank\_lines=True*
- **\*\*kwargs** – KEYWORD arguments forwarded to *index\_documents()* which is used to execute the operation

### Returns

Response payload <https://opensearch.org/docs/opensearch/rest-api/document-apis/bulk/#response>.

### Return type

Dict[str, Any]

## Examples

Writing contents of CSV file

```
>>> import awswrangler as wr
>>> client = wr.opensearch.connect(host='DOMAIN-ENDPOINT')
>>> wr.opensearch.index_csv(
...     client=client,
...     path='docs.csv',
...     index='sample-index1'
... )
```

Writing contents of CSV file using pandas\_kwargs

```
>>> import awswrangler as wr
>>> client = wr.opensearch.connect(host='DOMAIN-ENDPOINT')
>>> wr.opensearch.index_csv(
...     client=client,
...     path='docs.csv',
...     index='sample-index1',
...     pandas_kwargs={'sep': '|', 'na_values': ['null', 'none']}
... )
```

## `awswrangler.opensearch.index_documents`

```
awswrangler.opensearch.index_documents(client: opensearchpy.OpenSearch, documents:
                                         Iterable[Mapping[str, Any]], index: str, doc_type: str | None = None,
                                         keys_to_write: List[str] | None = None, id_keys: List[str] | None = None,
                                         ignore_status: List[Any] | Tuple[Any] | None = None, bulk_size: int = 1000, chunk_size: int | None = 500,
                                         max_chunk_bytes: int | None = 104857600, max_retries: int | None = 5, initial_backoff: int | None = 2, max_backoff: int | None = 600, **kwargs: Any) → Dict[str, Any]
```

Index all documents to OpenSearch index.

---

**Note:** Some of the args are referenced from opensearch-py client library (bulk helpers) <https://opensearch-py.readthedocs.io/en/latest/helpers.html#opensearchpy.helpers.bulk> [https://opensearch-py.readthedocs.io/en/latest/helpers.html#opensearchpy.helpers.streaming\\_bulk](https://opensearch-py.readthedocs.io/en/latest/helpers.html#opensearchpy.helpers.streaming_bulk)

If you receive *Error 429 (Too Many Requests)* /`_bulk` please to decrease `bulk_size` value. Please also consider modifying the cluster size and instance type - Read more here: <https://aws.amazon.com/premiumsupport/knowledge-center/resolve-429-error-es/>

---

### Parameters

- **client** (`OpenSearch`) – instance of `opensearchpy.OpenSearch` to use.
- **documents** (`Iterable[Mapping[str, Any]]`) – List which contains the documents that will be inserted.
- **index** (`str`) – Name of the index.
- **doc\_type** (`str, optional`) – Name of the document type (for Elasticsearch versions 5.x and earlier).
- **keys\_to\_write** (`List[str], optional`) – list of keys to index. If not provided all keys will be indexed
- **id\_keys** (`List[str], optional`) – list of keys that compound document unique id. If not provided will use `_id` key if exists, otherwise will generate unique identifier for each document.
- **ignore\_status** (`Union[List[Any], Tuple[Any]], optional`) – list of HTTP status codes that you want to ignore (not raising an exception)
- **bulk\_size** (`int`,) – number of docs in each `_bulk` request (default: 1000)
- **chunk\_size** (`int, optional`) – number of docs in one chunk sent to es (default: 500)
- **max\_chunk\_bytes** (`int, optional`) – the maximum size of the request in bytes (default: 100MB)
- **max\_retries** (`int, optional`) – maximum number of times a document will be retried when 429 is received, set to 0 (default) for no retries on 429 (default: 2)
- **initial\_backoff** (`int, optional`) – number of seconds we should wait before the first retry. Any subsequent retries will be powers of `initial_backoff*2**retry_number` (default: 2)
- **max\_backoff** (`int, optional`) – maximum number of seconds a retry will wait (default: 600)

- **\*\*kwargs** – KEYWORD arguments forwarded to bulk operation elasticsearch >= 7.10.2 / opensearch: <https://opensearch.org/docs/opensearch/rest-api/document-apis/bulk/#url-parameters> elasticsearch < 7.10.2: <https://opendistro.github.io/for-elasticsearch-docs/docs/elasticsearch/rest-api-reference/#url-parameters>

**Returns**

Response payload <https://opensearch.org/docs/opensearch/rest-api/document-apis/bulk/#response>.

**Return type**

Dict[str, Any]

## Examples

Writing documents

```
>>> import awswrangler as wr
>>> client = wr.opensearch.connect(host='DOMAIN-ENDPOINT')
>>> wr.opensearch.index_documents(
...     documents=[{'_id': '1', 'value': 'foo'}, {'_id': '2', 'value': 'bar'}],
...     index='sample-index1'
... )
```

## awswrangler.opensearch.index\_df

awswrangler.opensearch.index\_df(*client: opensearchpy.OpenSearch, df: DataFrame, index: str, doc\_type: str | None = None, \*\*kwargs: Any*) → Any

Index all documents from a DataFrame to OpenSearch index.

**Parameters**

- **client** (*OpenSearch*) – instance of opensearchpy.OpenSearch to use.
- **df** (*pd.DataFrame*) – Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>
- **index** (*str*) – Name of the index.
- **doc\_type** (*str, optional*) – Name of the document type (for Elasticsearch versions 5.x and earlier).
- **\*\*kwargs** – KEYWORD arguments forwarded to *index\_documents()* which is used to execute the operation

**Returns**

Response payload <https://opensearch.org/docs/opensearch/rest-api/document-apis/bulk/#response>.

**Return type**

Dict[str, Any]

## Examples

Writing rows of DataFrame

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> client = wr.opensearch.connect(host='DOMAIN-ENDPOINT')
>>> wr.opensearch.index_df(
...     client=client,
...     df=pd.DataFrame([{'_id': '1'}, {'_id': '2'}, {'_id': '3'}]),
...     index='sample-index1'
... )
```

### `awswrangler.opensearch.index_json`

`awswrangler.opensearch.index_json`(*client: opensearchpy.OpenSearch, path: str, index: str, doc\_type: str | None = None, boto3\_session: Session | None = Session(region\_name=None), json\_path: str | None = None, \*\*kwargs: Any*) → Any

Index all documents from JSON file to OpenSearch index.

The JSON file should be in a JSON-Lines text format (newline-delimited JSON) - <https://jsonlines.org/> OR if the is a single large JSON please provide `json_path`.

#### Parameters

- **client** (`OpenSearch`) – instance of `opensearchpy.OpenSearch` to use.
- **path** (`str`) – s3 or local path to the JSON file which contains the documents.
- **index** (`str`) – Name of the index.
- **doc\_type** (`str, optional`) – Name of the document type (for Elasticsearch versions 5.x and earlier).
- **json\_path** (`str, optional`) – JsonPath expression to specify explicit path to a single name element in a JSON hierarchical data structure. Read more about [JsonPath](#)
- **boto3\_session** (`boto3.Session(), optional`) – Boto3 Session to be used to access s3 if s3 path is provided. The default boto3 Session will be used if `boto3_session` receive None.
- **\*\*kwargs** – KEYWORD arguments forwarded to `index_documents()` which is used to execute the operation

#### Returns

Response payload <https://opensearch.org/docs/opensearch/rest-api/document-apis/bulk/#response>.

#### Return type

`Dict[str, Any]`

## Examples

Writing contents of JSON file

```
>>> import awswrangler as wr
>>> client = wr.opensearch.connect(host='DOMAIN-ENDPOINT')
>>> wr.opensearch.index_json(
...     client=client,
...     path='docs.json',
...     index='sample-index1'
... )
```

## awswrangler.opensearch.search

awswrangler.opensearch.**search**(*client: opensearchpy.OpenSearch, index: str | None = '\_all', search\_body: Dict[str, Any] | None = None, doc\_type: str | None = None, is\_scroll: bool | None = False, filter\_path: str | Collection[str] | None = None, \*\*kwargs: Any*) → DataFrame

Return results matching query DSL as pandas DataFrame.

### Parameters

- **client** (*OpenSearch*) – instance of opensearchpy.OpenSearch to use.
- **index** (*str, optional*) – A comma-separated list of index names to search. use *\_all* or empty string to perform the operation on all indices.
- **search\_body** (*Dict[str, Any], optional*) – The search definition using the [Query DSL](#).
- **doc\_type** (*str, optional*) – Name of the document type (for Elasticsearch versions 5.x and earlier).
- **is\_scroll** (*bool, optional*) – Allows to retrieve a large numbers of results from a single search request using `scroll` for example, for machine learning jobs. Because scroll search contexts consume a lot of memory, we suggest you don't use the scroll operation for frequent user queries.
- **filter\_path** (*Union[str, Collection[str]], optional*) – Use the `filter_path` parameter to reduce the size of the OpenSearch Service response (default: `['hits.hits._id','hits.hits._source']`)
- **\*\*kwargs** – KEYWORD arguments forwarded to `opensearchpy.OpenSearch.search` and also to `opensearchpy.helpers.scan` if `is_scroll=True`

### Returns

Results as Pandas DataFrame

### Return type

Union[pandas.DataFrame, Iterator[pandas.DataFrame]]

## Examples

## Searching an index using query DSL

```
>>> import awswrangler as wr
>>> client = wr.opensearch.connect(host='DOMAIN-ENDPOINT')
>>> df = wr.opensearch.search(
...     client=client,
...     index='movies',
...     search_body={
...         "query": {
...             "match": {
...                 "title": "wind"
...             }
...         }
...     }
... )
```

## **awswrangler.opensearch.search\_by\_sql**

```
aws_wrangler.opensearch.search_by_sql(client: opensearchpy.OpenSearch, sql_query: str, **kwargs: Any) → DataFrame
```

Return results matching [SQL query](#) as pandas DataFrame.

## Parameters

- **client** (*OpenSearch*) – instance of `opensearchpy.OpenSearch` to use.
  - **sql\_query** (*str*) – SQL query
  - **\*\*kwargs** – KEYWORD arguments forwarded to request url (e.g.: `filter` `path`, etc.)

## Returns

## Results as Pandas DataFrame

### Return type

`Union[pandas.DataFrame, Iterator[pandas.DataFrame]]`

## Examples

## Searching an index using SQL query

```
>>> import awswrangler as wr
>>> client = wr.opensearch.connect(host='DOMAIN-ENDPOINT')
>>> df = wr.opensearch.search_by_sql(
>>>     client=client,
>>>     sql_query='SELECT * FROM my-index LIMIT 50'
>>> )
```

## 1.9.12 Amazon Neptune

<code>connect(host, port[, iam_enabled])</code>	Create a connection to a Neptune cluster.
<code>execute_gremlin(client, query)</code>	Return results of a Gremlin traversal as pandas DataFrame.
<code>execute_opencypher(client, query)</code>	Return results of a openCypher traversal as pandas DataFrame.
<code>execute_sparql(client, query)</code>	Return results of a SPARQL query as pandas DataFrame.
<code>flatten_nested_df(df[, include_prefix, ...])</code>	Flatten the lists and dictionaries of the input data frame.
<code>to_property_graph(client, df[, batch_size, ...])</code>	Write records stored in a DataFrame into Amazon Neptune.
<code>to_rdf_graph(client, df[, batch_size, ...])</code>	Write records stored in a DataFrame into Amazon Neptune.

### awswrangler.neptune.connect

`awswrangler.neptune.connect(host: str, port: int, iam_enabled: bool = False, **kwargs: Any) → NeptuneClient`

Create a connection to a Neptune cluster.

#### Parameters

- **host (str)** – The host endpoint to connect to
- **port (int)** – The port endpoint to connect to
- **iam\_enabled(bool, optional)** – True if IAM is enabled on the cluster. Defaults to False.

#### Returns

[description]

#### Return type

NeptuneClient

### awswrangler.neptune.execute\_gremlin

`awswrangler.neptune.execute_gremlin(client: NeptuneClient, query: str) → DataFrame`

Return results of a Gremlin traversal as pandas DataFrame.

#### Parameters

- **client (neptune.Client)** – instance of the neptune client to use
- **query (str)** – The gremlin traversal to execute

#### Returns

Results as Pandas DataFrame

#### Return type

Union[pandas.DataFrame, Iterator[pandas.DataFrame]]

## Examples

Run a Gremlin Query

```
>>> import awswrangler as wr
>>> client = wr.neptune.connect(neptune_endpoint, neptune_port, iam_
    ~enabled=False)
>>> df = wr.neptune.execute_gremlin(client, "g.V().limit(1)")
```

## awswrangler.neptune.execute\_opencypher

`awswrangler.neptune.execute_opencypher(client: NeptuneClient, query: str) → DataFrame`

Return results of a openCypher traversal as pandas DataFrame.

### Parameters

- **client** (*NeptuneClient*) – instance of the neptune client to use
- **query** (*str*) – The openCypher query to execute

### Returns

Results as Pandas DataFrame

### Return type

`Union[pandas.DataFrame, Iterator[pandas.DataFrame]]`

## Examples

Run an openCypher query

```
>>> import awswrangler as wr
>>> client = wr.neptune.connect(neptune_endpoint, neptune_port, iam_enabled=False)
>>> resp = wr.neptune.execute_opencypher(client, "MATCH (n) RETURN n LIMIT 1")
```

## awswrangler.neptune.execute\_sparql

`awswrangler.neptune.execute_sparql(client: NeptuneClient, query: str) → DataFrame`

Return results of a SPARQL query as pandas DataFrame.

### Parameters

- **client** (*NeptuneClient*) – instance of the neptune client to use
- **query** (*str*) – The SPARQL traversal to execute

### Returns

Results as Pandas DataFrame

### Return type

`Union[pandas.DataFrame, Iterator[pandas.DataFrame]]`

## Examples

Run a SPARQL query

```
>>> import awswrangler as wr
>>> client = wr.neptune.connect(neptune_endpoint, neptune_port, iam_enabled=False)
>>> df = wr.neptune.execute_sparql(client, "PREFIX foaf: <http://xmlns.com/foaf/0.
˓→1/>
SELECT ?name
WHERE {
    ?person foaf:name ?name .
```

## awswrangler.neptune.flatten\_nested\_df

`awswrangler.neptune.flatten_nested_df(df: DataFrame, include_prefix: bool = True, separator: str = '_', recursive: bool = True) → DataFrame`

Flatten the lists and dictionaries of the input data frame.

### Parameters

- **df** (`pd.DataFrame`) – The input data frame
- **include\_prefix** (`bool, optional`) – If True, then it will prefix the new column name with the original column name. Defaults to True.
- **separator** (`str, optional`) – The separator to use between field names when a dictionary is exploded. Defaults to “\_”.
- **recursive** (`bool, optional`) – If True, then this will recurse the fields in the data frame. Defaults to True.

### Returns

`pd.DataFrame`

### Return type

The flattened data frame

## awswrangler.neptune.to\_property\_graph

`awswrangler.neptune.to_property_graph(client: NeptuneClient, df: DataFrame, batch_size: int = 50, use_header_cardinality: bool = True) → bool`

Write records stored in a DataFrame into Amazon Neptune.

If writing to a property graph then DataFrames for vertices and edges must be written separately. DataFrames for vertices must have a ~label column with the label and a ~id column for the vertex id. If the ~id column does not exist, the specified id does not exists, or is empty then a new vertex will be added. If no ~label column exists an exception will be thrown. DataFrames for edges must have a ~id, ~label, ~to, and ~from column. If the ~id column does not exist the specified id does not exists, or is empty then a new edge will be added. If no ~label, ~to, or ~from column exists an exception will be thrown.

If you would like to save data using *single* cardinality then you can postfix (single) to the column header and set `use_header_cardinality=True` (default). e.g. A column named `name(single)` will save the `name` property as single cardinality. You can disable this by setting by setting `use_header_cardinality=False`.

### Parameters

- **client** (`NeptuneClient`) – instance of the neptune client to use

- **df** (`pandas.DataFrame`) – Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>
- **batch\_size** (`int`) – The number of rows to save at a time. Default 50
- **use\_header\_cardinality** (`bool`) – If True, then the header cardinality will be used to save the data. Default True

**Returns**

True if records were written

**Return type**

`bool`

**Examples**

Writing to Amazon Neptune

```
>>> import awswrangler as wr
>>> client = wr.neptune.connect(neptune_endpoint, neptune_port, iam_enabled=False)
>>> wr.neptune.gremlin.to_property_graph(
...     df=df
... )
```

**awswrangler.neptune.to\_rdf\_graph**

`awswrangler.neptune.to_rdf_graph(client: NeptuneClient, df: DataFrame, batch_size: int = 50, subject_column: str = 's', predicate_column: str = 'p', object_column: str = 'o', graph_column: str = 'g') → bool`

Write records stored in a DataFrame into Amazon Neptune.

The DataFrame must consist of triples with column names for the subject, predicate, and object specified. If you want to add data into a named graph then you will also need the graph column.

**Parameters**

- **(`NeptuneClient`)** (`client`) – instance of the neptune client to use
- **(`pandas.DataFrame`)** (`df`) – Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>
- **(`str` (`graph_column`))** – The column name in the DataFrame for the graph if sending across quads. Defaults to ‘g’
- **(`str` (`subject_column`))** – The column name in the DataFrame for the subject. Defaults to ‘s’
- **(`optional`)** – The column name in the DataFrame for the subject. Defaults to ‘s’
- **(`str` (`predicate_column`))** – The column name in the DataFrame for the predicate. Defaults to ‘p’
- **(`optional`)** – The column name in the DataFrame for the predicate. Defaults to ‘p’
- **(`str` (`object_column`))** – The column name in the DataFrame for the object. Defaults to ‘o’
- **(`optional`)** – The column name in the DataFrame for the object. Defaults to ‘o’

**Returns**

True if records were written

**Return type**

bool

**Examples**

Writing to Amazon Neptune

```
>>> import awswrangler as wr
>>> client = wr.neptune.connect(neptune_endpoint, neptune_port, iam_enabled=False)
>>> wr.neptune.gremlin.to_rdf_graph(
...     df=df
... )
```

## 1.9.13 DynamoDB

<code>delete_items(items, table_name[, boto3_session])</code>	Delete all items in the specified DynamoDB table.
<code>execute_statement(statement[, parameters, ...])</code>	Run a PartiQL statement against a DynamoDB table.
<code>get_table(table_name[, boto3_session])</code>	Get DynamoDB table object for specified table name.
<code>put_csv(path, table_name[, boto3_session, ...])</code>	Write all items from a CSV file to a DynamoDB.
<code>put_df(df, table_name[, boto3_session, ...])</code>	Write all items from a DataFrame to a DynamoDB.
<code>put_items(items, table_name[, ...])</code>	Insert all items to the specified DynamoDB table.
<code>put_json(path, table_name[, boto3_session, ...])</code>	Write all items from JSON file to a DynamoDB.
<code>read_items()</code>	Read items from given DynamoDB table.
<code>read_partiql_query()</code>	Read data from a DynamoDB table via a PartiQL query.

### awswrangler.dynamodb.delete\_items

`awswrangler.dynamodb.delete_items(items: List[Dict[str, Any]], table_name: str, boto3_session: Session | None = None) → None`

Delete all items in the specified DynamoDB table.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

---

Check out the [Global Configurations Tutorial](#) for details.

**Parameters**

- **items** (`List[Dict[str, Any]]`) – List which contains the items that will be deleted.
- **table\_name** (`str`) – Name of the Amazon DynamoDB table.
- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 Session will be used if boto3\_session receive None.

**Returns**

None.

**Return type**

None

**Examples**

Writing rows of DataFrame

```
>>> import awswrangler as wr
>>> wr.dynamodb.delete_items(
...     items=[{'key': 1}, {'key': 2, 'value': 'Hello'}],
...     table_name='table'
... )
```

**awswrangler.dynamodb.execute\_statement**

`awswrangler.dynamodb.execute_statement(statement: str, parameters: List[Any] | None = None, consistent_read: bool = False, boto3_session: Session | None = None) → Iterator[Dict[str, Any]] | None`

Run a PartiQL statement against a DynamoDB table.

**Parameters**

- **statement** (`str`) – The PartiQL statement.
- **parameters** (`Optional[List[Any]]`) – The list of PartiQL parameters. These are applied to the statement in the order they are listed.
- **consistent\_read** (`bool`) – The consistency of a read operation. If `True`, then a strongly consistent read is used. `False` by default.
- **boto3\_session** (`Optional[boto3.Session]`) – Boto3 Session. If `None`, the default boto3 Session is used.

**Returns**

An iterator of the items from the statement response, if any.

**Return type**`Optional[Iterator[Dict[str, Any]]]`**Examples**

Insert an item

```
>>> import awswrangler as wr
>>> wr.dynamodb.execute_statement(
...     statement="INSERT INTO movies VALUE {'title': ?, 'year': ?, 'info': ?}",
...     parameters=[title, year, {"plot": plot, "rating": rating}],
... )
```

Select items

```
>>> wr.dynamodb.execute_statement(
...     statement="SELECT * FROM movies WHERE title=? AND year=?",
...     parameters=[title, year],
... )
```

Update items

```
>>> wr.dynamodb.execute_statement(  
...     statement="UPDATE movies SET info.rating=? WHERE title=? AND year=?",  
...     parameters=[rating, title, year],  
... )
```

Delete items

```
>>> wr.dynamodb.execute_statement(  
...     statement="DELETE FROM movies WHERE title=? AND year=?",  
...     parameters=[title, year],  
... )
```

## awswrangler.dynamodb.get\_table

**awswrangler.dynamodb.get\_table**(*table\_name*: str, *boto3\_session*: Session | None = None) → Table

Get DynamoDB table object for specified table name.

---

**Note:** This function has arguments which can be configured globally through *wr.config* or environment variables:

---

Check out the [Global Configurations Tutorial](#) for details.

### Parameters

- **table\_name** (str) – Name of the Amazon DynamoDB table.
- **boto3\_session** (Optional[boto3.Session]) – Boto3 Session. If None, the default boto3 Session is used.

### Returns

**dynamodb\_table** – Boto3 DynamoDB.Table object. <https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/dynamodb.html#DynamoDB.Table>

### Return type

boto3.resources.dynamodb.Table

## awswrangler.dynamodb.put\_csv

**awswrangler.dynamodb.put\_csv**(*path*: str | Path, *table\_name*: str, *boto3\_session*: Session | None = None, *use\_threads*: bool | int = True, \*\**pandas\_kwargs*: Any) → None

Write all items from a CSV file to a DynamoDB.

---

**Note:** This function has arguments which can be configured globally through *wr.config* or environment variables:

---

Check out the [Global Configurations Tutorial](#) for details.

### Parameters

- **path** (Union[str, Path]) – Path as str or Path object to the CSV file which contains the items.

- **table\_name** (*str*) – Name of the Amazon DynamoDB table.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 Session will be used if boto3\_session receive None.
- **use\_threads** (*Union[bool, int]*) – Used for Parallel Write requests. True (default) to enable concurrency, False to disable multiple threads. If enabled os.cpu\_count() is used as the max number of threads. If integer is provided, specified number is used.
- **pandas\_kwargs** – KEYWORD arguments forwarded to pandas.read\_csv(). You can NOT pass *pandas\_kwargs* explicit, just add valid Pandas arguments in the function call and awswrangler will accept it. e.g. `wr.dynamodb.put_csv('items.csv', 'my_table', sep='|', na_values=['null', 'none'], skip_blank_lines=True)` [https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read\\_csv.html](https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.read_csv.html)

**Returns**

None.

**Return type**

None

**Examples**

Writing contents of CSV file

```
>>> import awswrangler as wr
>>> wr.dynamodb.put_csv(
...     path='items.csv',
...     table_name='table'
... )
```

Writing contents of CSV file using pandas\_kwargs

```
>>> import awswrangler as wr
>>> wr.dynamodb.put_csv(
...     path='items.csv',
...     table_name='table',
...     sep='|',
...     na_values=['null', 'none']
... )
```

**awswrangler.dynamodb.put\_df**

`awswrangler.dynamodb.put_df(df: DataFrame, table_name: str, boto3_session: Session | None = None, use_threads: bool | int = True) → None`

Write all items from a DataFrame to a DynamoDB.

---

**Note:** Following arguments are not supported in distributed mode with engine *EngineEnum.RAY*:

- *boto3\_session*
-

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

---

Check out the [Global Configurations Tutorial](#) for details.

### Parameters

- **df** (`pd.DataFrame`) – Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>
- **table\_name** (`str`) – Name of the Amazon DynamoDB table.
- **use\_threads** (`Union[bool, int]`) – Used for Parallel Write requests. True (default) to enable concurrency, False to disable multiple threads. If enabled `os.cpu_count()` is used as the max number of threads. If integer is provided, specified number is used.
- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 Session will be used if `boto3_session` receive None.

### Returns

None.

### Return type

None

## Examples

Writing rows of DataFrame

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> wr.dynamodb.put_df(
...     df=pd.DataFrame({'key': [1, 2, 3]}),
...     table_name='table'
... )
```

## awswrangler.dynamodb.put\_items

`awswrangler.dynamodb.put_items(items: List[Dict[str, Any]] | List[Mapping[str, Any]], table_name: str, boto3_session: Session | None = None, use_threads: bool | int = True) → None`

Insert all items to the specified DynamoDB table.

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
- 

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

---

Check out the [Global Configurations Tutorial](#) for details.

## Parameters

- **items** (*Union[List[Dict[str, Any]], List[Mapping[str, Any]]]*) – List which contains the items that will be inserted.
- **table\_name** (*str*) – Name of the Amazon DynamoDB table.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 Session will be used if boto3\_session receive None.
- **use\_threads** (*Union[bool, int]*) – Used for Parallel Write requests. True (default) to enable concurrency, False to disable multiple threads. If enabled os.cpu\_count() is used as the max number of threads. If integer is provided, specified number is used.

## Returns

None.

## Return type

None

## Examples

Writing items

```
>>> import awswrangler as wr
>>> wr.dynamodb.put_items(
...     items=[{'key': 1}, {'key': 2, 'value': 'Hello'}],
...     table_name='table'
... )
```

## `awswrangler.dynamodb.put_json`

`awswrangler.dynamodb.put_json`(*path: str | Path, table\_name: str, boto3\_session: Session | None = None, use\_threads: bool | int = True*) → None

Write all items from JSON file to a DynamoDB.

The JSON file can either contain a single item which will be inserted in the DynamoDB or an array of items which all be inserted.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

---

Check out the [Global Configurations Tutorial](#) for details.

## Parameters

- **path** (*Union[str, Path]*) – Path as str or Path object to the JSON file which contains the items.
- **table\_name** (*str*) – Name of the Amazon DynamoDB table.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 Session will be used if boto3\_session receive None.
- **use\_threads** (*Union[bool, int]*) – Used for Parallel Write requests. True (default) to enable concurrency, False to disable multiple threads. If enabled os.cpu\_count() is used as the max number of threads. If integer is provided, specified number is used.

**Returns**

None.

**Return type**

None

**Examples**

Writing contents of JSON file

```
>>> import awswrangler as wr
>>> wr.dynamodb.put_json(
...     path='items.json',
...     table_name='table'
... )
```

**awswrangler.dynamodb.read\_items**

```
awswrangler.dynamodb.read_items(table_name: str, index_name: str | None = None, partition_values: Sequence[Any] | None = None, sort_values: Sequence[Any] | None = None, filter_expression: ConditionBase | str | None = None, key_condition_expression: ConditionBase | str | None = None, expression_attribute_names: Dict[str, str] | None = None, expression_attribute_values: Dict[str, Any] | None = None, consistent: bool = False, columns: Sequence[str] | None = None, allow_full_scan: bool = False, max_items_evaluated: int | None = None, as_dataframe: Literal[True] = True, use_threads: bool | int = True, boto3_session: Session | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → DataFrame
```

```
awswrangler.dynamodb.read_items(table_name: str, *, index_name: str | None = None, partition_values: Sequence[Any] | None = None, sort_values: Sequence[Any] | None = None, filter_expression: ConditionBase | str | None = None, key_condition_expression: ConditionBase | str | None = None, expression_attribute_names: Dict[str, str] | None = None, expression_attribute_values: Dict[str, Any] | None = None, consistent: bool = False, columns: Sequence[str] | None = None, allow_full_scan: bool = False, max_items_evaluated: int | None = None, as_dataframe: Literal[False], use_threads: bool | int = True, boto3_session: Session | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → List[Dict[str, Any]]
```

```
awswrangler.dynamodb.read_items(table_name: str, *, index_name: str | None = None, partition_values: Sequence[Any] | None = None, sort_values: Sequence[Any] | None = None, filter_expression: ConditionBase | str | None = None, key_condition_expression: ConditionBase | str | None = None, expression_attribute_names: Dict[str, str] | None = None, expression_attribute_values: Dict[str, Any] | None = None, consistent: bool = False, columns: Sequence[str] | None = None, allow_full_scan: bool = False, max_items_evaluated: int | None = None, as_dataframe: bool, use_threads: bool | int = True, boto3_session: Session | None = None, pyarrow_additional_kwargs: Dict[str, Any] | None = None) → DataFrame | List[Dict[str, Any]]
```

Read items from given DynamoDB table.

This function aims to gracefully handle (some of) the complexity of read actions available in Boto3 towards a DynamoDB table, abstracting it away while providing a single, unified entry point.

Under the hood, it wraps all the four available read actions: get\_item, batch\_get\_item, query and scan.

---

**Note:** Number of Parallel Scan segments is based on the `use_threads` argument. A parallel scan with a large number of workers could consume all the provisioned throughput of the table or index. See: <https://docs.aws.amazon.com/amazondynamodb/latest/developerguide/Scan.html#Scan.ParallelScan>

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
- 

### Parameters

- **table\_name** (`str`) – DynamoDB table name.
- **index\_name** (`str, optional`) – Name of the secondary global or local index on the table. Defaults to None.
- **partition\_values** (`Sequence[Any], optional`) – Partition key values to retrieve. Defaults to None.
- **sort\_values** (`Sequence[Any], optional`) – Sort key values to retrieve. Defaults to None.
- **filter\_expression** (`Union[ConditionBase, str], optional`) – Filter expression as string or combinations of boto3.dynamodb.conditions.Attr conditions. Defaults to None.
- **key\_condition\_expression** (`Union[ConditionBase, str], optional`) – Key condition expression as string or combinations of boto3.dynamodb.conditions.Key conditions. Defaults to None.
- **expression\_attribute\_names** (`Mapping[str, str], optional`) – Mapping of placeholder and target attributes. Defaults to None.
- **expression\_attribute\_values** (`Mapping[str, Any], optional`) – Mapping of placeholder and target values. Defaults to None.
- **consistent** (`bool`) – If True, ensure that the performed read operation is strongly consistent, otherwise eventually consistent. Defaults to False.
- **columns** (`Sequence[str], optional`) – Attributes to retain in the returned items. Defaults to None (all attributes).
- **allow\_full\_scan** (`bool`) – If True, allow full table scan without any filtering. Defaults to False.
- **max\_items\_evaluated** (`int, optional`) – Limit the number of items evaluated in case of query or scan operations. Defaults to None (all matching items).
- **as\_dataframe** (`bool`) – If True, return items as pd.DataFrame, otherwise as list/dict. Defaults to True.
- **use\_threads** (`Union[bool, int]`) – Used for Parallel Scan requests. True (default) to enable concurrency, False to disable multiple threads. If enabled os.cpu\_count() is used as the max number of threads. If integer is provided, specified number is used.

- **boto3\_session** (*boto3.Session, optional*) – Boto3 Session. Defaults to None (the default boto3 Session will be used).
- **pyarrow\_additional\_kwargs** (*Dict[str, Any], optional*) – Forwarded to *to\_pandas* method converting from PyArrow tables to Pandas DataFrame. Valid values include “split\_blocks”, “self\_destruct”, “ignore\_metadata”. e.g. `pyarrow_additional_kwargs={‘split_blocks’: True}`.

#### Raises

- **exceptions.InvalidArgumentType** – When the specified table has also a sort key but only the partition values are specified.
- **exceptions.InvalidArgumentCombination** – When both partition and sort values sequences are specified but they have different lengths, or when provided parameters are not enough informative to proceed with a read operation.

#### Returns

A Data frame containing the retrieved items, or a dictionary of returned items.

#### Return type

`Union[pd.DataFrame, List[Mapping[str, Any]]]`

## Examples

Reading 5 random items from a table

```
>>> import awswrangler as wr
>>> df = wr.dynamodb.read_items(table_name='my-table', max_items_evaluated=5)
```

Strongly-consistent reading of a given partition value from a table

```
>>> import awswrangler as wr
>>> df = wr.dynamodb.read_items(table_name='my-table', partition_values=['my-value'],
   ↪, consistent=True)
```

Reading items pairwise-identified by partition and sort values, from a table with a composite primary key

```
>>> import awswrangler as wr
>>> df = wr.dynamodb.read_items(
...     table_name='my-table',
...     partition_values=['pv_1', 'pv_2'],
...     sort_values=['sv_1', 'sv_2']
... )
```

Reading items while retaining only specified attributes, automatically handling possible collision with DynamoDB reserved keywords

```
>>> import awswrangler as wr
>>> df = wr.dynamodb.read_items(
...     table_name='my-table',
...     partition_values=['my-value'],
...     columns=['connection', 'other_col'] # connection is a reserved keyword,
   ↪managed under the hood!
... )
```

Reading all items from a table explicitly allowing full scan

```
>>> import awswrangler as wr
>>> df = wr.dynamodb.read_items(table_name='my-table', allow_full_scan=True)
```

Reading items matching a KeyConditionExpression expressed with boto3.dynamodb.conditions.Key

```
>>> import awswrangler as wr
>>> from boto3.dynamodb.conditions import Key
>>> df = wr.dynamodb.read_items(
...     table_name='my-table',
...     key_condition_expression=(Key('key_1').eq('val_1') & Key('key_2').eq('val_2')
... ))
... )
```

Same as above, but with KeyConditionExpression as string

```
>>> import awswrangler as wr
>>> df = wr.dynamodb.read_items(
...     table_name='my-table',
...     key_condition_expression='key_1 = :v1 and key_2 = :v2',
...     expression_attribute_values={':v1': 'val_1', ':v2': 'val_2'},
... )
```

Reading items matching a FilterExpression expressed with boto3.dynamodb.conditions.Attr

```
>>> import awswrangler as wr
>>> from boto3.dynamodb.conditions import Attr
>>> df = wr.dynamodb.read_items(
...     table_name='my-table',
...     filter_expression=Attr('my_attr').eq('this-value')
... )
```

Same as above, but with FilterExpression as string

```
>>> import awswrangler as wr
>>> df = wr.dynamodb.read_items(
...     table_name='my-table',
...     filter_expression='my_attr = :v',
...     expression_attribute_values={':v': 'this-value'}
... )
```

Reading items involving an attribute which collides with DynamoDB reserved keywords

```
>>> import awswrangler as wr
>>> df = wr.dynamodb.read_items(
...     table_name='my-table',
...     filter_expression='#operator = :v',
...     expression_attribute_names={'#operator': 'operator'},
...     expression_attribute_values={':v': 'this-value'}
... )
```

## awswrangler.dynamodb.read\_partiql\_query

```
awswrangler.dynamodb.read_partiql_query(query: str, parameters: List[Any] | None = None, chunked: Literal[False] = False, boto3_session: Session | None = None) → DataFrame  
awswrangler.dynamodb.read_partiql_query(query: str, *, parameters: List[Any] | None = None, chunked: Literal[True], boto3_session: Session | None = None) → Iterator[DataFrame]  
awswrangler.dynamodb.read_partiql_query(query: str, *, parameters: List[Any] | None = None, chunked: bool, boto3_session: Session | None = None) → DataFrame | Iterator[DataFrame]
```

Read data from a DynamoDB table via a PartiQL query.

### Parameters

- **query** (*str*) – The PartiQL statement.
- **parameters** (*Optional[List[Any]]*) – The list of PartiQL parameters. These are applied to the statement in the order they are listed.
- **chunked** (*bool*) – If *True* an iterable of DataFrames is returned. *False* by default.
- **boto3\_session** (*Optional[boto3.Session]*) – Boto3 Session. If *None*, the default boto3 Session is used.

### Returns

Result as Pandas DataFrame.

### Return type

Union[pd.DataFrame, Iterator[pd.DataFrame]]

## Examples

Select all contents from a table

```
>>> import awswrangler as wr  
>>> wr.dynamodb.read_partiql_query(  
...     query="SELECT * FROM my_table WHERE title=? AND year=?",  
...     parameters=[title, year],  
... )
```

Select specific columns from a table

```
>>> wr.dynamodb.read_partiql_query(  
...     query="SELECT id FROM table"  
... )
```

## 1.9.14 Amazon Timestream

<code>create_database(database[, kms_key_id, ...])</code>	Create a new Timestream database.
<code>create_table(database, table, ...[, tags, ...])</code>	Create a new Timestream database.
<code>delete_database(database[, boto3_session])</code>	Delete a given Timestream database.
<code>delete_table(database, table[, boto3_session])</code>	Delete a given Timestream table.
<code>query()</code>	Run a query and retrieve the result as a Pandas DataFrame.
<code>write(df, database, table[, time_col, ...])</code>	Store a Pandas DataFrame into an Amazon Timestream table.

### awswrangler.timestream.create\_database

`awswrangler.timestream.create_database(database: str, kms_key_id: str | None = None, tags: Dict[str, str] | None = None, boto3_session: Session | None = None) → str`

Create a new Timestream database.

---

**Note:** If the KMS key is not specified, the database will be encrypted with a Timestream managed KMS key located in your account.

---

#### Parameters

- **database** (*str*) – Database name.
- **kms\_key\_id** (*Optional[str]*) – The KMS key for the database. If the KMS key is not specified, the database will be encrypted with a Timestream managed KMS key located in your account.
- **tags** (*Optional[Dict[str, str]]*) – Key/Value dict to put on the database. Tags enable you to categorize databases and/or tables, for example, by purpose, owner, or environment. e.g. {"foo": "boo", "bar": "xoo"})
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 Session will be used if boto3\_session receive None.

#### Returns

The Amazon Resource Name that uniquely identifies this database. (ARN)

#### Return type

*str*

### Examples

Creating a database.

```
>>> import awswrangler as wr
>>> arn = wr.timestream.create_database("MyDatabase")
```

**awswrangler.timestream.create\_table**

```
awswrangler.timestream.create_table(database: str, table: str, memory_retention_hours: int,  
                                     magnetic_retention_days: int, tags: Dict[str, str] | None = None,  
                                     timestream_additional_kwargs: Dict[str, Any] | None = None,  
                                     boto3_session: Session | None = None) → str
```

Create a new Timestream database.

---

**Note:** If the KMS key is not specified, the database will be encrypted with a Timestream managed KMS key located in your account.

---

**Parameters**

- **database** (*str*) – Database name.
- **table** (*str*) – Table name.
- **memory\_retention\_hours** (*int*) – The duration for which data must be stored in the memory store.
- **magnetic\_retention\_days** (*int*) – The duration for which data must be stored in the magnetic store.
- **tags** (*Optional[Dict[str, str]]*) – Key/Value dict to put on the table. Tags enable you to categorize databases and/or tables, for example, by purpose, owner, or environment. e.g. {"foo": "boo", "bar": "xoo"})
- **timestream\_additional\_kwargs** (*Optional[Dict[str, Any]]*) – Forwarded to botocore requests. e.g. timestream\_additional\_kwargs={'MagneticStoreWriteProperties': {'EnableMagneticStoreWrites': True}})
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 Session will be used if boto3\_session receive None.

**Returns**

The Amazon Resource Name that uniquely identifies this database. (ARN)

**Return type**

*str*

**Examples**

Creating a table.

```
>>> import awswrangler as wr  
>>> arn = wr.timestream.create_table(  
...     database="MyDatabase",  
...     table="MyTable",  
...     memory_retention_hours=3,  
...     magnetic_retention_days=7  
... )
```

**awswrangler.timestream.delete\_database**

```
awswrangler.timestream.delete_database(database: str, boto3_session: Session | None = None) → None
```

Delete a given Timestream database. This is an irreversible operation.

After a database is deleted, the time series data from its tables cannot be recovered.

All tables in the database must be deleted first, or a ValidationException error will be thrown.

Due to the nature of distributed retries, the operation can return either success or a ResourceNotFoundException. Clients should consider them equivalent.

**Parameters**

- **database** (str) – Database name.
- **boto3\_session** (boto3.Session(), optional) – Boto3 Session. The default boto3 Session will be used if boto3\_session receive None.

**Returns**

None.

**Return type**

None

**Examples**

Deleting a database

```
>>> import awswrangler as wr
>>> arn = wr.timestream.delete_database("MyDatabase")
```

**awswrangler.timestream.delete\_table**

```
awswrangler.timestream.delete_table(database: str, table: str, boto3_session: Session | None = None) → None
```

Delete a given Timestream table.

This is an irreversible operation.

After a Timestream database table is deleted, the time series data stored in the table cannot be recovered.

Due to the nature of distributed retries, the operation can return either success or a ResourceNotFoundException. Clients should consider them equivalent.

**Parameters**

- **database** (str) – Database name.
- **table** (str) – Table name.
- **boto3\_session** (boto3.Session(), optional) – Boto3 Session. The default boto3 Session will be used if boto3\_session receive None.

**Returns**

None.

**Return type**

None

## Examples

Deleting a table

```
>>> import awswrangler as wr
>>> arn = wr.timestream.delete_table("MyDatabase", "MyTable")
```

## awswrangler.timestream.query

```
awswrangler.timestream.query(sql: str, chunked: Literal[False] = False, pagination_config: Dict[str, Any] | None = None, boto3_session: Session | None = None) → DataFrame
awswrangler.timestream.query(sql: str, chunked: Literal[True], pagination_config: Dict[str, Any] | None = None, boto3_session: Session | None = None) → Iterator[DataFrame]
awswrangler.timestream.query(sql: str, chunked: bool, pagination_config: Dict[str, Any] | None = None, boto3_session: Session | None = None) → DataFrame | Iterator[DataFrame]
```

Run a query and retrieve the result as a Pandas DataFrame.

### Parameters

- **sql (str)** – SQL query.
- **chunked (bool)** – If True returns DataFrame iterator, and a single DataFrame otherwise. False by default.
- **pagination\_config (Dict[str, Any], optional)** – Pagination configuration dictionary of a form {‘MaxItems’: 10, ‘PageSize’: 10, ‘StartingToken’: ‘...’}
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 Session will be used if boto3\_session receive None.

### Returns

Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>

### Return type

Union[pd.DataFrame, Iterator[pd.DataFrame]]

## Examples

Run a query and return the result as a Pandas DataFrame or an iterable.

```
>>> import awswrangler as wr
>>> df = wr.timestream.query('SELECT * FROM "sampleDB"."sampleTable" ORDER BY time DESC LIMIT 10')
```

## awswrangler.timestream.write

```
awswrangler.timestream.write(df: DataFrame, database: str, table: str, time_col: str | None = None,
                             measure_col: str | List[str | None] | None = None, dimensions_cols: List[str | None] | None = None, version: int = 1, use_threads: bool | int = True,
                             measure_name: str | None = None, common_attributes: Dict[str, Any] | None = None, boto3_session: Session | None = None) → List[Dict[str, str]]
```

Store a Pandas DataFrame into an Amazon Timestream table.

---

**Note:** In case `use_threads=True`, the number of threads from `os.cpu_count()` is used.

If the Timestream service rejects a record(s), this function will not throw a Python exception. Instead it will return the rejection information.

---

**Note:** If `time_col` column is supplied, it must be of type timestamp. TimeUnit is set to MILLISECONDS by default.

---

**Note:** Following arguments are not supported in distributed mode with engine `EngineEnum.RAY`:

- `boto3_session`
- 

### Parameters

- **df** (`pandas.DataFrame`) – Pandas DataFrame <https://pandas.pydata.org/pandas-docs/stable/reference/api/pandas.DataFrame.html>
- **database** (`str`) – Amazon Timestream database name.
- **table** (`str`) – Amazon Timestream table name.
- **time\_col** (`Optional[str]`) – DataFrame column name to be used as time. MUST be a timestamp column.
- **measure\_col** (`Union[str, List[str], None]`) – DataFrame column name(s) to be used as measure.
- **dimensions\_cols** (`Optional[List[str]]`) – List of DataFrame column names to be used as dimensions.
- **version** (`int`) – Version number used for upserts. Documentation [https://docs.aws.amazon.com/timestream/latest/developerguide/API\\_WriteRecords.html](https://docs.aws.amazon.com/timestream/latest/developerguide/API_WriteRecords.html).
- **use\_threads** (`bool, int`) – True to enable concurrent writing, False to disable multiple threads. If enabled, `os.cpu_count()` is used as the number of threads. If integer is provided, specified number is used.
- **measure\_name** (`Optional[str]`) – Name that represents the data attribute of the time series. Overrides `measure_col` if specified.
- **common\_attributes** (`Optional[Dict[str, Any]]`) – Dictionary of attributes shared across all records in the request. Using common attributes can optimize the cost of writes by reducing the size of request payloads. Values in `common_attributes` take precedence over all other arguments and data frame values. Dimension attributes are merged with attributes in record objects. Example: `{"Dimensions": [{"Name": "device_id", "Value": "12345"}], "MeasureValueType": "DOUBLE"}`.

- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. If None, the default boto3 Session is used.

**Returns**

Rejected records. Possible reasons for rejection are described here: [https://docs.aws.amazon.com/timestream/latest/developerguide/API\\_RejectedRecord.html](https://docs.aws.amazon.com/timestream/latest/developerguide/API_RejectedRecord.html)

**Return type**

`List[Dict[str, str]]`

## Examples

Store a Pandas DataFrame into a Amazon Timestream table.

```
>>> import awswrangler as wr
>>> import pandas as pd
>>> df = pd.DataFrame(
>>>     {
>>>         "time": [datetime.now(), datetime.now(), datetime.now()],
>>>         "dim0": ["foo", "boo", "bar"],
>>>         "dim1": [1, 2, 3],
>>>         "measure": [1.0, 1.1, 1.2],
>>>     }
>>> )
>>> rejected_records = wr.timestream.write(
>>>     df=df,
>>>     database="sampleDB",
>>>     table="sampleTable",
>>>     time_col="time",
>>>     measure_col="measure",
>>>     dimensions_cols=["dim0", "dim1"],
>>> )
>>> assert len(rejected_records) == 0
```

Return value if some records are rejected.

```
>>> [
>>>     {
>>>         'ExistingVersion': 2,
>>>         'Reason': 'The record version 1 is lower than the existing version 2. A
>>>         'higher version is required to update the measure value.',
>>>         'RecordIndex': 0
>>>     }
>>> ]
```

## 1.9.15 Amazon EMR

<code>build_spark_step(path[, args, deploy_mode, ...])</code>	Build the Step structure (dictionary).
<code>build_step(command[, name, ...])</code>	Build the Step structure (dictionary).
<code>create_cluster(subnet_id[, cluster_name, ...])</code>	Create a EMR cluster with instance fleets configuration.
<code>get_cluster_state(cluster_id[, boto3_session])</code>	Get the EMR cluster state.
<code>get_step_state(cluster_id, step_id[, ...])</code>	Get EMR step state.
<code>submit_ecr_credentials_refresh(cluster_id, path)</code>	Update internal ECR credentials.
<code>submit_spark_step(cluster_id, path[, args, ...])</code>	Submit Spark Step.
<code>submit_step(cluster_id, command[, name, ...])</code>	Submit new job in the EMR Cluster.
<code>submit_steps(cluster_id, steps[, boto3_session])</code>	Submit a list of steps.
<code>terminate_cluster(cluster_id[, boto3_session])</code>	Terminate EMR cluster.

### `awswrangler.emr.build_spark_step`

```
awswrangler.emr.build_spark_step(path: str, args: List[str] | None = None, deploy_mode: Literal['cluster', 'client'] = 'cluster', docker_image: str | None = None, name: str = 'my-step', action_on_failure: Literal['TERMINATE_JOB_FLOW', 'TERMINATE_CLUSTER', 'CANCEL_AND_WAIT', 'CONTINUE'] = 'CONTINUE', region: str | None = None, boto3_session: Session | None = None) → Dict[str, Any]
```

Build the Step structure (dictionary).

#### Parameters

- **path (str)** – Script path. (e.g. s3://bucket/app.py)
- **args (List[str], optional)** – CLI args to use with script
- **deploy\_mode (str)** – “cluster” | “client”
- **docker\_image (str, optional)** – e.g. “[ACCOUNT\_ID].dkr.ecr.{REGION}.amazonaws.com/{IMAGE\_NAME}
- **name (str, optional)** – Step name.
- **action\_on\_failure (str)** – ‘TERMINATE\_JOB\_FLOW’, ‘TERMINATE\_CLUSTER’, ‘CANCEL\_AND\_WAIT’, ‘CONTINUE’
- **region (str, optional)** – Region name to not get it from boto3.Session. (e.g. us-east-1)
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

#### Returns

Step structure.

#### Return type

Dict[str, Any]

## Examples

```
>>> import awswrangler as wr
>>> step_id = wr.emr.submit_steps(
>>>     cluster_id="cluster-id",
>>>     steps=[
>>>         wr.emr.build_spark_step(path="s3://bucket/app.py")
>>>     ]
>>> )
```

## awswrangler.emr.build\_step

```
awswrangler.emr.build_step(command: str, name: str = 'my-step', action_on_failure:
    Literal['TERMINATE_JOB_FLOW', 'TERMINATE_CLUSTER',
    'CANCEL_AND_WAIT', 'CONTINUE'] = 'CONTINUE', script: bool = False,
    region: str | None = None, boto3_session: Session | None = None) → Dict[str, Any]
```

Build the Step structure (dictionary).

### Parameters

- **command** (*str*) – e.g. ‘echo “Hello!”’ e.g. for script ‘s3://.../script.sh arg1 arg2’
- **name** (*str, optional*) – Step name.
- **action\_on\_failure** (*str*) – ‘TERMINATE\_JOB\_FLOW’, ‘TERMINATE\_CLUSTER’, ‘CANCEL\_AND\_WAIT’, ‘CONTINUE’
- **script** (*bool*) – False for raw command or True for script runner. <https://docs.aws.amazon.com/emr/latest/ReleaseGuide/emr-commandrunner.html>
- **region** (*str, optional*) – Region name to not get it from boto3.Session. (e.g. *us-east-1*)
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Step structure.

### Return type

Dict[str, Any]

## Examples

```
>>> import awswrangler as wr
>>> steps = []
>>> for cmd in ['echo "Hello"', "ls -la"]:
...     steps.append(wr.emr.build_step(name=cmd, command=cmd))
>>> wr.emr.submit_steps(cluster_id="cluster-id", steps=steps)
```

**awswrangler.emr.create\_cluster**

```
awswrangler.emr.create_cluster(subnet_id: str, cluster_name: str = 'my-emr-cluster', logging_s3_path: str | None = None, emr_release: str = 'emr-6.7.0', emr_ec2_role: str = 'EMR_EC2_DefaultRole', emr_role: str = 'EMR_DefaultRole', instance_type_master: str = 'r5.xlarge', instance_type_core: str = 'r5.xlarge', instance_type_task: str = 'r5.xlarge', instance_ebs_size_master: int = 64, instance_ebs_size_core: int = 64, instance_ebs_size_task: int = 64, instance_num_on_demand_master: int = 1, instance_num_on_demand_core: int = 0, instance_num_on_demand_task: int = 0, instance_num_spot_master: int = 0, instance_num_spot_core: int = 0, instance_num_spot_task: int = 0, spot_bid_percentage_of_on_demand_master: int = 100, spot_bid_percentage_of_on_demand_core: int = 100, spot_bid_percentage_of_on_demand_task: int = 100, spot_provisioning_timeout_master: int = 5, spot_provisioning_timeout_core: int = 5, spot_provisioning_timeout_task: int = 5, spot_timeout_to_on_demand_master: bool = True, spot_timeout_to_on_demand_core: bool = True, spot_timeout_to_on_demand_task: bool = True, python3: bool = True, spark_glue_catalog: bool = True, hive_glue_catalog: bool = True, presto_glue_catalog: bool = True, consistent_view: bool = False, consistent_view_retry_seconds: int = 10, consistent_view_retry_count: int = 5, consistent_view_table_name: str = 'EmrFSMetadata', bootstraps_paths: List[str] | None = None, debugging: bool = True, applications: List[str] | None = None, visible_to_all_users: bool = True, key_pair_name: str | None = None, security_group_master: str | None = None, security_groups_master_additional: List[str] | None = None, security_group_slave: str | None = None, security_groups_slave_additional: List[str] | None = None, security_group_service_access: str | None = None, security_configuration: str | None = None, docker: bool = False, extra_public_registries: List[str] | None = None, spark_log_level: str = 'WARN', spark_jars_path: List[str] | None = None, spark_defaults: Dict[str, str] | None = None, spark_pyarrow: bool = False, custom_classifications: List[Dict[str, Any]] | None = None, maximize_resource_allocation: bool = False, steps: List[Dict[str, Any]] | None = None, custom_ami_id: str | None = None, step_concurrency_level: int = 1, keep_cluster_alive_when_no_steps: bool = True, termination_protected: bool = False, auto_termination_policy: Dict[str, int] | None = None, tags: Dict[str, str] | None = None, boto3_session: Session | None = None, configurations: List[Dict[str, Any]] | None = None) → str
```

Create a EMR cluster with instance fleets configuration.

<https://docs.aws.amazon.com/emr/latest/ManagementGuide/emr-instance-fleet.html>

**Parameters**

- **subnet\_id** (*str*) – VPC subnet ID.
- **cluster\_name** (*str*) – Cluster name.
- **logging\_s3\_path** (*str, optional*) – Logging s3 path (e.g. `s3://BUCKET_NAME/DIRECTORY_NAME/`). If None, the default is `s3://aws-logs-{AccountId}-{RegionId}/elasticmapreduce/`
- **emr\_release** (*str*) – EMR release (e.g. emr-5.28.0).

- **emr\_ec2\_role** (*str*) – IAM role name.
- **emr\_role** (*str*) – IAM role name.
- **instance\_type\_master** (*str*) – EC2 instance type.
- **instance\_type\_core** (*str*) – EC2 instance type.
- **instance\_type\_task** (*str*) – EC2 instance type.
- **instance\_ebs\_size\_master** (*int*) – Size of EBS in GB.
- **instance\_ebs\_size\_core** (*int*) – Size of EBS in GB.
- **instance\_ebs\_size\_task** (*int*) – Size of EBS in GB.
- **instance\_num\_on\_demand\_master** (*int*) – Number of on demand instances.
- **instance\_num\_on\_demand\_core** (*int*) – Number of on demand instances.
- **instance\_num\_on\_demand\_task** (*int*) – Number of on demand instances.
- **instance\_num\_spot\_master** (*int*) – Number of spot instances.
- **instance\_num\_spot\_core** (*int*) – Number of spot instances.
- **instance\_num\_spot\_task** (*int*) – Number of spot instances.
- **spot\_bid\_percentage\_of\_on\_demand\_master** (*int*) – The bid price, as a percentage of On-Demand price.
- **spot\_bid\_percentage\_of\_on\_demand\_core** (*int*) – The bid price, as a percentage of On-Demand price.
- **spot\_bid\_percentage\_of\_on\_demand\_task** (*int*) – The bid price, as a percentage of On-Demand price.
- **spot\_provisioning\_timeout\_master** (*int*) – The spot provisioning timeout period in minutes. If Spot instances are not provisioned within this time period, the TimeOutAction is taken. Minimum value is 5 and maximum value is 1440. The timeout applies only during initial provisioning, when the cluster is first created.
- **spot\_provisioning\_timeout\_core** (*int*) – The spot provisioning timeout period in minutes. If Spot instances are not provisioned within this time period, the TimeOutAction is taken. Minimum value is 5 and maximum value is 1440. The timeout applies only during initial provisioning, when the cluster is first created.
- **spot\_provisioning\_timeout\_task** (*int*) – The spot provisioning timeout period in minutes. If Spot instances are not provisioned within this time period, the TimeOutAction is taken. Minimum value is 5 and maximum value is 1440. The timeout applies only during initial provisioning, when the cluster is first created.
- **spot\_timeout\_to\_on\_demand\_master** (*bool*) – After a provisioning timeout should the cluster switch to on demand or shutdown?
- **spot\_timeout\_to\_on\_demand\_core** (*bool*) – After a provisioning timeout should the cluster switch to on demand or shutdown?
- **spot\_timeout\_to\_on\_demand\_task** (*bool*) – After a provisioning timeout should the cluster switch to on demand or shutdown?
- **python3** (*bool*) – Python 3 Enabled?
- **spark\_glue\_catalog** (*bool*) – Spark integration with Glue Catalog?
- **hive\_glue\_catalog** (*bool*) – Hive integration with Glue Catalog?

- **presto\_glue\_catalog** (*bool*) – Presto integration with Glue Catalog?
- **consistent\_view** (*bool*) – Consistent view allows EMR clusters to check for list and read-after-write consistency for Amazon S3 objects written by or synced with EMRFS. <https://docs.aws.amazon.com/emr/latest/ManagementGuide/emr-plan-consistent-view.html>
- **consistent\_view\_retry\_seconds** (*int*) – Delay between the tries (seconds).
- **consistent\_view\_retry\_count** (*int*) – Number of tries.
- **consistent\_view\_table\_name** (*str*) – Name of the DynamoDB table to store the consistent view data.
- **bootstraps\_paths** (*List[str], optional*) – Bootstraps paths (e.g [“s3://BUCKET\_NAME/script.sh”]).
- **debugging** (*bool*) – Debugging enabled?
- **applications** (*List[str], optional*) – List of applications (e.g [“Hadoop”, “Spark”, “Ganglia”, “Hive”]). If None, [“Spark”] will be considered.
- **visible\_to\_all\_users** (*bool*) – True or False.
- **key\_pair\_name** (*str, optional*) – Key pair name.
- **security\_group\_master** (*str, optional*) – The identifier of the Amazon EC2 security group for the master node.
- **security\_groups\_master\_additional** (*str, optional*) – A list of additional Amazon EC2 security group IDs for the master node.
- **security\_group\_slave** (*str, optional*) – The identifier of the Amazon EC2 security group for the core and task nodes.
- **security\_groups\_slave\_additional** (*str, optional*) – A list of additional Amazon EC2 security group IDs for the core and task nodes.
- **security\_group\_service\_access** (*str, optional*) – The identifier of the Amazon EC2 security group for the Amazon EMR service to access clusters in VPC private subnets.
- **security\_configuration** (*str, optional*) – The name of a security configuration to apply to the cluster.
- **docker** (*bool*) – Enable Docker Hub and ECR registries access.
- **extra\_public\_registries** (*List[str], optional*) – Additional docker registries.
- **spark\_log\_level** (*str*) – log4j.rootCategory log level (ALL, DEBUG, INFO, WARN, ERROR, FATAL, OFF, TRACE).
- **spark\_jars\_path** (*List[str], optional*) – spark.jars e.g. [s3://.../foo.jar, s3://.../boo.jar] <https://spark.apache.org/docs/latest/configuration.html>
- **spark\_defaults** (*Dict[str, str], optional*) – <https://docs.aws.amazon.com/emr/latest/ReleaseGuide/emr-spark-configure.html#spark-defaults>
- **spark\_pyarrow** (*bool*) – Enable PySpark to use PyArrow behind the scenes. P.S. You must install pyarrow by your self via bootstrap
- **custom\_classifications** (*List[Dict[str, Any]], optional*) – Extra classifications.
- **maximize\_resource\_allocation** (*bool*) – Configure your executors to utilize the maximum resources possible <https://docs.aws.amazon.com/emr/latest/ReleaseGuide/emr-spark-configure.html#emr-spark-maximizesresourceallocation>

- **custom\_ami\_id** (*Optional[str]*) – The custom AMI ID to use for the provisioned instance group
- **steps** (*List[Dict[str, Any]]*, *optional*) – Steps definitions (Obs : str Use EMR.build\_step() to build it)
- **keep\_cluster\_alive\_when\_no\_steps** (*bool*) – Specifies whether the cluster should remain available after completing all steps
- **termination\_protected** (*bool*) – Specifies whether the Amazon EC2 instances in the cluster are protected from termination by API calls, user intervention, or in the event of a job-flow error.
- **auto\_termination\_policy** (*Optional[Dict[str, int]]*) – Specifies the auto-termination policy that is attached to an Amazon EMR cluster eg. `auto_termination_policy = {'IdleTimeout': 123}` IdleTimeout specifies the amount of idle time in seconds after which the cluster automatically terminates. You can specify a minimum of 60 seconds and a maximum of 604800 seconds (seven days).
- **tags** (*Dict[str, str]*, *optional*) – Key/Value collection to put on the Cluster. e.g. `{“foo”: “boo”, “bar”: “xoo”}`
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.
- **configurations** (*List[Dict[str, Any]]*, *optional*) – The list of configurations supplied for an EMR cluster instance group.

By default, adds log4j config as follows: `{"Classification": "spark-log4j", "Properties": {"log4j.rootCategory": f'{pars['spark_log_level']}'}, console"}}`

#### Returns

Cluster ID.

#### Return type

str

## Examples

### Minimal Example

```
>>> import awswrangler as wr
>>> cluster_id = wr.emr.create_cluster("SUBNET_ID")
```

### Minimal Example With Custom Classification

```
>>> import awswrangler as wr
>>> cluster_id = wr.emr.create_cluster(
>>>     subnet_id="SUBNET_ID",
>>>     custom_classifications=[
>>>         {
>>>             "Classification": "livy-conf",
>>>             "Properties": {
>>>                 "livy.spark.master": "yarn",
>>>                 "livy.spark.deploy-mode": "cluster",
>>>                 "livy.server.session.timeout": "16h",
>>>             },
>>>         }
>>>     }
>>> )
```

(continues on next page)

(continued from previous page)

```
>>>     ],
>>> )
```

## Full Example

```
>>> import awswrangler as wr
>>> cluster_id = wr.emr.create_cluster(
...     cluster_name="wrangler_cluster",
...     logging_s3_path=f"s3://BUCKET_NAME/emr-logs/",
...     emr_release="emr-5.28.0",
...     subnet_id="SUBNET_ID",
...     emr_ec2_role="EMR_EC2_DefaultRole",
...     emr_role="EMR_DefaultRole",
...     instance_type_master="m5.xlarge",
...     instance_type_core="m5.xlarge",
...     instance_type_task="m5.xlarge",
...     instance_ebs_size_master=50,
...     instance_ebs_size_core=50,
...     instance_ebs_size_task=50,
...     instance_num_on_demand_master=1,
...     instance_num_on_demand_core=1,
...     instance_num_on_demand_task=1,
...     instance_num_spot_master=0,
...     instance_num_spot_core=1,
...     instance_num_spot_task=1,
...     spot_bid_percentage_of_on_demand_master=100,
...     spot_bid_percentage_of_on_demand_core=100,
...     spot_bid_percentage_of_on_demand_task=100,
...     spot_provisioning_timeout_master=5,
...     spot_provisioning_timeout_core=5,
...     spot_provisioning_timeout_task=5,
...     spot_timeout_to_on_demand_master=True,
...     spot_timeout_to_on_demand_core=True,
...     spot_timeout_to_on_demand_task=True,
...     python3=True,
...     spark_glue_catalog=True,
...     hive_glue_catalog=True,
...     presto_glue_catalog=True,
...     bootstraps_paths=None,
...     debugging=True,
...     applications=["Hadoop", "Spark", "Ganglia", "Hive"],
...     visible_to_all_users=True,
...     key_pair_name=None,
...     spark_jars_path=[f"s3://...jar"],
...     maximize_resource_allocation=True,
...     keep_cluster_alive_when_no_steps=True,
...     termination_protected=False,
...     spark_pyarrow=True,
...     tags={
...         "foo": "boo"
...     })

```

## awswrangler.emr.get\_cluster\_state

`awswrangler.emr.get_cluster_state(cluster_id: str, boto3_session: Session | None = None) → str`

Get the EMR cluster state.

Possible states: ‘STARTING’, ‘BOOTSTRAPPING’, ‘RUNNING’, ‘WAITING’, ‘TERMINATING’, ‘TERMINATED’, ‘TERMINATED\_WITH\_ERRORS’

### Parameters

- **cluster\_id** (*str*) – Cluster ID.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

State.

### Return type

*str*

## Examples

```
>>> import awswrangler as wr
>>> state = wr.emr.get_cluster_state("cluster-id")
```

## awswrangler.emr.get\_step\_state

`awswrangler.emr.get_step_state(cluster_id: str, step_id: str, boto3_session: Session | None = None) → str`

Get EMR step state.

Possible states: ‘PENDING’, ‘CANCEL\_PENDING’, ‘RUNNING’, ‘COMPLETED’, ‘CANCELLED’, ‘FAILED’, ‘INTERRUPTED’

### Parameters

- **cluster\_id** (*str*) – Cluster ID.
- **step\_id** (*str*) – Step ID.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

State.

### Return type

*str*

## Examples

```
>>> import awswrangler as wr
>>> state = wr.emr.get_step_state("cluster-id", "step-id")
```

### awswrangler.emr.submit\_ecr\_credentials\_refresh

`awswrangler.emr.submit_ecr_credentials_refresh`(*cluster\_id*: str, *path*: str, *action\_on\_failure*: Literal['TERMINATE\_JOB\_FLOW', 'TERMINATE\_CLUSTER', 'CANCEL\_AND\_WAIT', 'CONTINUE'] = 'CONTINUE', *boto3\_session*: Session | None = None) → str

Update internal ECR credentials.

#### Parameters

- **cluster\_id** (str) – Cluster ID.
- **path** (str) – Amazon S3 path where awswrangler will stage the script `ecr_credentials_refresh.py` (e.g. `s3://bucket/emr/`)
- **action\_on\_failure** (str) – ‘TERMINATE\_JOB\_FLOW’, ‘TERMINATE\_CLUSTER’, ‘CANCEL\_AND\_WAIT’, ‘CONTINUE’
- **boto3\_session** (`boto3.Session()`, optional) – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

#### Returns

Step ID.

#### Return type

str

## Examples

```
>>> import awswrangler as wr
>>> step_id = wr.emr.submit_ecr_credentials_refresh("cluster_id", "s3://bucket/emr/
   <--")
```

### awswrangler.emr.submit\_spark\_step

`awswrangler.emr.submit_spark_step`(*cluster\_id*: str, *path*: str, *args*: List[str] | None = None, *deploy\_mode*: Literal['cluster', 'client'] = 'cluster', *docker\_image*: str | None = None, *name*: str = 'my-step', *action\_on\_failure*: Literal['TERMINATE\_JOB\_FLOW', 'TERMINATE\_CLUSTER', 'CANCEL\_AND\_WAIT', 'CONTINUE'] = 'CONTINUE', *region*: str | None = None, *boto3\_session*: Session | None = None) → str

Submit Spark Step.

#### Parameters

- **cluster\_id** (str) – Cluster ID.
- **path** (str) – Script path. (e.g. `s3://bucket/app.py`)

- **args** (*List[str]*, *optional*) – CLI args to use with script eg. args = [”–name”, “hello-world”]
- **deploy\_mode** (*str*) – “cluster” | “client”
- **docker\_image** (*str*, *optional*) – e.g. “[ACCOUNT\_ID].dkr.ecr.{REGION}.amazonaws.com/{IMAGE\_NAME}
- **name** (*str*, *optional*) – Step name.
- **action\_on\_failure** (*str*) – ‘TERMINATE\_JOB\_FLOW’, ‘TERMINATE\_CLUSTER’, ‘CANCEL\_AND\_WAIT’, ‘CONTINUE’
- **region** (*str*, *optional*) – Region name to not get it from boto3.Session. (e.g. *us-east-1*)
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Step ID.

**Return type**

str

**Examples**

```
>>> import awswrangler as wr
>>> step_id = wr.emr.submit_spark_step(
>>>     cluster_id="cluster-id",
>>>     path="s3://bucket/emr/app.py"
>>> )
```

**awswrangler.emr.submit\_step**

```
awswrangler.emr.submit_step(cluster_id: str, command: str, name: str = 'my-step', action_on_failure: Literal['TERMINATE_JOB_FLOW', 'TERMINATE_CLUSTER', 'CANCEL_AND_WAIT', 'CONTINUE'] = 'CONTINUE', script: bool = False, boto3_session: Session | None = None) → str
```

Submit new job in the EMR Cluster.

**Parameters**

- **cluster\_id** (*str*) – Cluster ID.
- **command** (*str*) – e.g. ‘echo “Hello!”’ e.g. for script ‘s3://.../script.sh arg1 arg2’
- **name** (*str*, *optional*) – Step name.
- **action\_on\_failure** (*str*) – ‘TERMINATE\_JOB\_FLOW’, ‘TERMINATE\_CLUSTER’, ‘CANCEL\_AND\_WAIT’, ‘CONTINUE’
- **script** (*bool*) – True for raw command or False for script runner. <https://docs.aws.amazon.com/emr/latest/ReleaseGuide/emr-commandrunner.html>
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Step ID.

**Return type**

str

**Examples**

```
>>> import awswrangler as wr
>>> step_id = wr.emr.submit_step(
...     cluster_id=cluster_id,
...     name="step_test",
...     command="s3://...script.sh arg1 arg2",
...     script=True)
```

**awswrangler.emr.submit\_steps**

`awswrangler.emr.submit_steps(cluster_id: str, steps: List[Dict[str, Any]], boto3_session: Session | None = None) → List[str]`

Submit a list of steps.

**Parameters**

- **cluster\_id** (str) – Cluster ID.
- **steps** (List[Dict[str, Any]]) – Steps definitions (Obs: Use EMR.build\_step() to build it).
- **boto3\_session** (boto3.Session(), optional) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

List of step IDs.

**Return type**

List[str]

**Examples**

```
>>> import awswrangler as wr
>>> for cmd in ['echo "Hello"', "ls -la"]:
...     steps.append(wr.emr.build_step(name=cmd, command=cmd))
>>> wr.emr.submit_steps(cluster_id="cluster-id", steps=steps)
```

**awswrangler.emr.terminate\_cluster**

`awswrangler.emr.terminate_cluster(cluster_id: str, boto3_session: Session | None = None) → None`

Terminate EMR cluster.

**Parameters**

- **cluster\_id** (str) – Cluster ID.
- **boto3\_session** (boto3.Session(), optional) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

None.

**Return type**

None

**Examples**

```
>>> import awswrangler as wr
>>> wr.emr.terminate_cluster("cluster-id")
```

## 1.9.16 Amazon CloudWatch Logs

<code>read_logs(query, log_group_names[, ...])</code>	Run a query against AWS CloudWatchLogs Insights and convert the results to Pandas DataFrame.
<code>run_query(query, log_group_names[, ...])</code>	Run a query against AWS CloudWatchLogs Insights and wait the results.
<code>start_query(query, log_group_names[, ...])</code>	Run a query against AWS CloudWatchLogs Insights.
<code>wait_query(query_id[, boto3_session, ...])</code>	Wait query ends.
<code>describe_log_streams(log_group_name[, ...])</code>	List the log streams for the specified log group, return results as a Pandas DataFrame.
<code>filter_log_events(log_group_name[, ...])</code>	List log events from the specified log group.

### awswrangler.cloudwatch.read\_logs

```
awswrangler.cloudwatch.read_logs(query: str, log_group_names: List[str], start_time: datetime | None = None, end_time: datetime | None = None, limit: int | None = None, boto3_session: Session | None = None) → DataFrame
```

Run a query against AWS CloudWatchLogs Insights and convert the results to Pandas DataFrame.

[https://docs.aws.amazon.com/AmazonCloudWatch/latest/logs/CWL\\_QuerySyntax.html](https://docs.aws.amazon.com/AmazonCloudWatch/latest/logs/CWL_QuerySyntax.html)

**Parameters**

- **query** (*str*) – The query string.
- **log\_group\_names** (*str*) – The list of log groups to be queried. You can include up to 20 log groups.
- **start\_time** (*datetime.datetime*) – The beginning of the time range to query.
- **end\_time** (*datetime.datetime*) – The end of the time range to query.
- **limit** (*Optional[int]*) – The maximum number of log events to return in the query.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Result as a Pandas DataFrame.

**Return type**

pandas.DataFrame

## Examples

```
>>> import awswrangler as wr
>>> df = wr.cloudwatch.read_logs(
...     log_group_names=["loggroup"],
...     query="fields @timestamp, @message | sort @timestamp desc | limit 5",
... )
```

## `awswrangler.cloudwatch.run_query`

`awswrangler.cloudwatch.run_query(query: str, log_group_names: List[str], start_time: datetime | None = None, end_time: datetime | None = None, limit: int | None = None, boto3_session: Session | None = None) → List[List[Dict[str, str]]]`

Run a query against AWS CloudWatchLogs Insights and wait the results.

[https://docs.aws.amazon.com/AmazonCloudWatch/latest/logs/CWL\\_QuerySyntax.html](https://docs.aws.amazon.com/AmazonCloudWatch/latest/logs/CWL_QuerySyntax.html)

### Parameters

- **query (str)** – The query string.
- **log\_group\_names (str)** – The list of log groups to be queried. You can include up to 20 log groups.
- **start\_time (datetime.datetime)** – The beginning of the time range to query.
- **end\_time (datetime.datetime)** – The end of the time range to query.
- **limit (Optional[int])** – The maximum number of log events to return in the query.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Result.

### Return type

List[List[Dict[str, str]]]

## Examples

```
>>> import awswrangler as wr
>>> result = wr.cloudwatch.run_query(
...     log_group_names=["loggroup"],
...     query="fields @timestamp, @message | sort @timestamp desc | limit 5",
... )
```

## awswrangler.cloudwatch.start\_query

```
awswrangler.cloudwatch.start_query(query: str, log_group_names: List[str], start_time: datetime | None = None, end_time: datetime | None = None, limit: int | None = None, boto3_session: Session | None = None) → str
```

Run a query against AWS CloudWatchLogs Insights.

[https://docs.aws.amazon.com/AmazonCloudWatch/latest/logs/CWL\\_QuerySyntax.html](https://docs.aws.amazon.com/AmazonCloudWatch/latest/logs/CWL_QuerySyntax.html)

### Parameters

- **query** (*str*) – The query string.
- **log\_group\_names** (*str*) – The list of log groups to be queried. You can include up to 20 log groups.
- **start\_time** (*datetime.datetime*) – The beginning of the time range to query.
- **end\_time** (*datetime.datetime*) – The end of the time range to query.
- **limit** (*Optional[int]*) – The maximum number of log events to return in the query.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Query ID.

### Return type

*str*

## Examples

```
>>> import awswrangler as wr
>>> query_id = wr.cloudwatch.start_query(
...     log_group_names=["loggroup"],
...     query="fields @timestamp, @message | sort @timestamp desc | limit 5",
... )
```

## awswrangler.cloudwatch.wait\_query

```
awswrangler.cloudwatch.wait_query(query_id: str, boto3_session: Session | None = None, cloudwatch_query_wait_polling_delay: float = 1.0) → Dict[str, Any]
```

Wait query ends.

[https://docs.aws.amazon.com/AmazonCloudWatch/latest/logs/CWL\\_QuerySyntax.html](https://docs.aws.amazon.com/AmazonCloudWatch/latest/logs/CWL_QuerySyntax.html)

---

**Note:** This function has arguments which can be configured globally through *wr.config* or environment variables:

- `cloudwatch_query_wait_polling_delay`

Check out the [Global Configurations Tutorial](#) for details.

---

### Parameters

- **query\_id** (*str*) – Query ID.

- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **cloudwatch\_query\_wait\_polling\_delay** (`float`, *default: 0.2 seconds*) – Interval in seconds for how often the function will check if the CloudWatch query has completed.

**Returns**

Query result payload.

**Return type**

`Dict[str, Any]`

**Examples**

```
>>> import awswrangler as wr
>>> query_id = wr.cloudwatch.start_query(
...     log_group_names=["loggroup"],
...     query="fields @timestamp, @message | sort @timestamp desc | limit 5",
... )
... response = wr.cloudwatch.wait_query(query_id=query_id)
```

**awswrangler.cloudwatch.describe\_log\_streams**

`awswrangler.cloudwatch.describe_log_streams(log_group_name: str, log_stream_name_prefix: str | None = None, order_by: str | None = 'LogStreamName', descending: bool | None = False, limit: int | None = 50, boto3_session: Session | None = None) → DataFrame`

List the log streams for the specified log group, return results as a Pandas DataFrame.

[https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/logs.html#CloudWatchLogs.Client.describe\\_log\\_streams](https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/logs.html#CloudWatchLogs.Client.describe_log_streams)

**Parameters**

- **log\_group\_name** (`str`) – The name of the log group.
- **log\_stream\_name\_prefix** (`str`) – The prefix to match log streams' name
- **order\_by** (`str`) – If the value is LogStreamName , the results are ordered by log stream name. If the value is LastEventTime , the results are ordered by the event time. The default value is LogStreamName .
- **descending** (`bool`) – If the value is True, results are returned in descending order. If the value is to False, results are returned in ascending order. The default value is False.
- **limit** (`Optional[int]`) – The maximum number of items returned. The default is up to 50 items.
- **boto3\_session** (`boto3.Session()`, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Result as a Pandas DataFrame.

**Return type**

`pandas.DataFrame`

## Examples

```
>>> import awswrangler as wr
>>> df = wr.cloudwatch.describe_log_streams(
...     log_group_name="aws_sdk_pandas_log_group",
...     log_stream_name_prefix="aws_sdk_pandas_log_stream",
... )
```

### **awswrangler.cloudwatch.filter\_log\_events**

```
awswrangler.cloudwatch.filter_log_events(log_group_name: str, log_stream_name_prefix: str | None = None, log_stream_names: List[str] | None = None, filter_pattern: str | None = None, start_time: datetime | None = None, end_time: datetime | None = None, boto3_session: Session | None = None) → DataFrame
```

List log events from the specified log group. The results are returned as Pandas DataFrame.

[https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/logs.html#CloudWatchLogs.Client.filter\\_log\\_events](https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/logs.html#CloudWatchLogs.Client.filter_log_events)

---

**Note:** Cannot call filter\_log\_events with both log\_stream\_names and log\_stream\_name\_prefix.

---

#### Parameters

- **log\_group\_name** (*str*) – The name of the log group.
- **log\_stream\_name\_prefix** (*str*) – Filters the results to include only events from log streams that have names starting with this prefix.
- **log\_stream\_names** (*List[str]*) – Filters the results to only logs from the log streams in this list.
- **filter\_pattern** (*str*) – The filter pattern to use. If not provided, all the events are matched.
- **start\_time** (*datetime.datetime*) – Events with a timestamp before this time are not returned.
- **end\_time** (*datetime.datetime*) – Events with a timestamp later than this time are not returned.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

#### Returns

Result as a Pandas DataFrame.

#### Return type

pandas.DataFrame

## Examples

Get all log events from log group ‘aws\_sdk\_pandas\_log\_group’ that have log stream prefix ‘aws\_sdk\_pandas\_log\_stream’

```
>>> import awswrangler as wr
>>> df = wr.cloudwatch.filter_log_events(
...     log_group_name="aws_sdk_pandas_log_group",
...     log_stream_name_prefix="aws_sdk_pandas_log_stream",
... )
```

Get all log events contains ‘REPORT’ from log stream ‘aws\_sdk\_pandas\_log\_stream\_one’ and ‘aws\_sdk\_pandas\_log\_stream\_two’ from log group ‘aws\_sdk\_pandas\_log\_group’

```
>>> import awswrangler as wr
>>> df = wr.cloudwatch.filter_log_events(
...     log_group_name="aws_sdk_pandas_log_group",
...     log_stream_names=["aws_sdk_pandas_log_stream_one", "aws_sdk_pandas_log_
... stream_two"],
...     filter_pattern='REPORT',
... )
```

### 1.9.17 Amazon QuickSight

<code>cancel_ingestion(ingestion_id[, ...])</code>	Cancel an ongoing ingestion of data into SPICE.
<code>create_athena_data_source(name[, workgroup, ...])</code>	Create a QuickSight data source pointing to an Athena/Workgroup.
<code>create_athena_dataset(name[, database, ...])</code>	Create a QuickSight dataset.
<code>create_ingestion([dataset_name, dataset_id, ...])</code>	Create and starts a new SPICE ingestion on a dataset.
<code>delete_all_dashboards([account_id, ...])</code>	Delete all dashboards.
<code>delete_all_data_sources([account_id, ...])</code>	Delete all data sources.
<code>delete_all_datasets([account_id, ...])</code>	Delete all datasets.
<code>delete_all_templates([account_id, ...])</code>	Delete all templates.
<code>delete_dashboard([name, dashboard_id, ...])</code>	Delete a dashboard.
<code>delete_data_source([name, data_source_id, ...])</code>	Delete a data source.
<code>delete_dataset([name, dataset_id, ...])</code>	Delete a dataset.
<code>delete_template([name, template_id, ...])</code>	Delete a template.
<code>describe_dashboard([name, dashboard_id, ...])</code>	Describe a QuickSight dashboard by name or ID.
<code>describe_data_source([name, data_source_id, ...])</code>	Describe a QuickSight data source by name or ID.
<code>describe_data_source_permissions([name, ...])</code>	Describe a QuickSight data source permissions by name or ID.
<code>describe_dataset([name, dataset_id, ...])</code>	Describe a QuickSight dataset by name or ID.
<code>describe_ingestion(ingestion_id[, ...])</code>	Describe a QuickSight ingestion by ID.
<code>get_dashboard_id(name[, account_id, ...])</code>	Get QuickSight dashboard ID given a name and fails if there is more than 1 ID associated with this name.
<code>get_dashboard_ids(name[, account_id, ...])</code>	Get QuickSight dashboard IDs given a name.
<code>get_data_source_arn(name[, account_id, ...])</code>	Get QuickSight data source ARN given a name and fails if there is more than 1 ARN associated with this name.
<code>get_data_source_arns(name[, account_id, ...])</code>	Get QuickSight Data source ARNs given a name.
<code>get_data_source_id(name[, account_id, ...])</code>	Get QuickSight data source ID given a name and fails if there is more than 1 ID associated with this name.

continues on next page

Table 11 – continued from previous page

<code>get_data_source_ids(name[, account_id, ...])</code>	Get QuickSight data source IDs given a name.
<code>get_dataset_id(name[, account_id, boto3_session])</code>	Get QuickSight Dataset ID given a name and fails if there is more than 1 ID associated with this name.
<code>get_dataset_ids(name[, account_id, ...])</code>	Get QuickSight dataset IDs given a name.
<code>get_template_id(name[, account_id, ...])</code>	Get QuickSight template ID given a name and fails if there is more than 1 ID associated with this name.
<code>get_template_ids(name[, account_id, ...])</code>	Get QuickSight template IDs given a name.
<code>list_dashboards([account_id, boto3_session])</code>	List dashboards in an AWS account.
<code>list_data_sources([account_id, boto3_session])</code>	List all QuickSight Data sources summaries.
<code>list_datasets([account_id, boto3_session])</code>	List all QuickSight datasets summaries.
<code>list_groups([namespace, account_id, ...])</code>	List all QuickSight Groups.
<code>list_group_memberships(group_name[, ...])</code>	List all QuickSight Group memberships.
<code>list_iam_policy_assignments([status, ...])</code>	List IAM policy assignments in the current Amazon QuickSight account.
<code>list_iam_policy_assignments_for_user(user_name)</code>	List all the IAM policy assignments.
<code>list_ingestions([dataset_name, dataset_id, ...])</code>	List the history of SPICE ingestions for a dataset.
<code>list_templates([account_id, boto3_session])</code>	List all QuickSight templates.
<code>list_users([namespace, account_id, ...])</code>	Return a list of all of the Amazon QuickSight users belonging to this account.
<code>list_user_groups(user_name[, namespace, ...])</code>	List the Amazon QuickSight groups that an Amazon QuickSight user is a member of.

## awswrangler.quicksight.cancel\_ingestion

```
awswrangler.quicksight.cancel_ingestion(ingestion_id: str, dataset_name: str | None = None, dataset_id: str | None = None, account_id: str | None = None, boto3_session: Session | None = None) → None
```

Cancel an ongoing ingestion of data into SPICE.

---

**Note:** You must pass a not None value for `dataset_name` or `dataset_id` argument.

---

### Parameters

- `ingestion_id (str)` – Ingestion ID.
- `dataset_name (str, optional)` – Dataset name.
- `dataset_id (str, optional)` – Dataset ID.
- `account_id (str, optional)` – If None, the account ID will be inferred from your boto3 session.
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

### Returns

None.

### Return type

None

## Examples

```
>>> import awswrangler as wr
>>> wr.quicksight.cancel_ingestion(ingestion_id="...", dataset_name="...")
```

### `awswrangler.quicksight.create_athena_data_source`

`awswrangler.quicksight.create_athena_data_source(name: str, workgroup: str = 'primary', allowed_to_use: List[str] | None = None, allowed_to_manage: List[str] | None = None, tags: Dict[str, str] | None = None, account_id: str | None = None, boto3_session: Session | None = None, namespace: str = 'default') → None`

Create a QuickSight data source pointing to an Athena/Workgroup.

---

**Note:** You will not be able to see the the data source in the console if you not pass your user to one of the `allowed_*` arguments.

---

#### Parameters

- **name (str)** – Data source name.
- **workgroup (str)** – Athena workgroup.
- **tags (Dict[str, str], optional)** – Key/Value collection to put on the Cluster. e.g. {"foo": "boo", "bar": "xoo"})
- **allowed\_to\_use (optional)** – List of principals that will be allowed to see and use the data source. e.g. ["John"]
- **allowed\_to\_manage (optional)** – List of principals that will be allowed to see, use, update and delete the data source. e.g. ["Mary"]
- **account\_id (str, optional)** – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **namespace (str)** – The namespace. Currently, you should set this to default.

#### Returns

None.

#### Return type

None

## Examples

```
>>> import awswrangler as wr
>>> wr.quicksight.create_athena_data_source(
...     name="...",
...     allowed_to_manage=["john"]
... )
```

### `awswrangler.quicksight.create_athena_dataset`

```
awswrangler.quicksight.create_athena_dataset(name: str, database: str | None = None, table: str | None = None, sql: str | None = None, sql_name: str | None = None, data_source_name: str | None = None, data_source_arn: str | None = None, import_mode: Literal['SPICE', 'DIRECT_QUERY'] = 'DIRECT_QUERY', allowed_to_use: List[str] | None = None, allowed_to_manage: List[str] | None = None, logical_table_alias: str = 'LogicalTable', rename_columns: Dict[str, str] | None = None, cast_columns_types: Dict[str, str] | None = None, tag_columns: Dict[str, List[Dict[str, Any]]] | None = None, tags: Dict[str, str] | None = None, account_id: str | None = None, boto3_session: Session | None = None, namespace: str = 'default') → str
```

Create a QuickSight dataset.

---

**Note:** You will not be able to see the the dataset in the console if you not pass your username to one of the `allowed_*` arguments.

---

---

**Note:** You must pass `database/table` OR `sql` argument.

---

---

**Note:** You must pass `data_source_name` OR `data_source_arn` argument.

---

#### Parameters

- **name (str)** – Dataset name.
- **database (str)** – Athena's database name.
- **table (str)** – Athena's table name.
- **sql (str)** – Use a SQL query to define your table.
- **sql\_name (str, optional)** – Query name.
- **data\_source\_name (str, optional)** – QuickSight data source name.
- **data\_source\_arn (str, optional)** – QuickSight data source ARN.
- **import\_mode (str)** – Indicates whether you want to import the data into SPICE. ‘SPICE’|‘DIRECT\_QUERY’

- **tags** (*Dict[str, str], optional*) – Key/Value collection to put on the Cluster. e.g. {"foo": "boo", "bar": "xoo"}
- **allowed\_to\_use** (*optional*) – List of usernames that will be allowed to see and use the data source. e.g. ["john", "Mary"]
- **allowed\_to\_manage** (*optional*) – List of usernames that will be allowed to see, use, update and delete the data source. e.g. ["Mary"]
- **logical\_table\_alias** (*str*) – A display name for the logical table.
- **rename\_columns** (*Dict[str, str], optional*) – Dictionary to map column renames. e.g. {"old\_name": "new\_name", "old\_name2": "new\_name2"}
- **cast\_columns\_types** (*Dict[str, str], optional*) – Dictionary to map column casts. e.g. {"col\_name": "STRING", "col\_name2": "DECIMAL"} Valid types: 'STRING'|'INTEGER'|'DECIMAL'|'DATETIME'
- **tag\_columns** (*Dict[str, List[Dict[str, Any]]], optional*) – Dictionary to map column tags. e.g. {"col\_name": [{"ColumnGeographicRole": "CITY"}], "col\_name2": [{"ColumnDescription": {"Text": "description"}]}] Valid geospatial roles: 'COUNTRY'|'STATE'|'COUNTY'|'CITY'|'POSTCODE'|'LONGITUDE'|'LATITUDE'
- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.
- **namespace** (*str*) – The namespace. Currently, you should set this to default.

**Returns**

Dataset ID.

**Return type**

str

**Examples**

```
>>> import awswrangler as wr
>>> dataset_id = wr.quicksight.create_athena_dataset(
...     name="...",
...     database="...",
...     table="...",
...     data_source_name="...",
...     allowed_to_manage=["Mary"]
... )
```

## awswrangler.quicksight.create\_ingestion

```
awswrangler.quicksight.create_ingestion(dataset_name: str | None = None, dataset_id: str | None = None, ingestion_id: str | None = None, account_id: str | None = None, boto3_session: Session | None = None) → str
```

Create and starts a new SPICE ingestion on a dataset.

---

**Note:** You must pass dataset\_name OR dataset\_id argument.

---

### Parameters

- **dataset\_name** (*str, optional*) – Dataset name.
- **dataset\_id** (*str, optional*) – Dataset ID.
- **ingestion\_id** (*str, optional*) – Ingestion ID.
- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Ingestion ID

### Return type

*str*

## Examples

```
>>> import awswrangler as wr
>>> status = wr.quicksight.create_ingestion("my_dataset")
```

## awswrangler.quicksight.delete\_all\_dashboards

```
awswrangler.quicksight.delete_all_dashboards(account_id: str | None = None, regex_filter: str | None = None, boto3_session: Session | None = None) → None
```

Delete all dashboards.

### Parameters

- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.
- **regex\_filter** (*str, optional*) – Regex regex\_filter that will delete all dashboards with a match in their Name
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

None.

### Return type

*None*

## Examples

```
>>> import awswrangler as wr
>>> wr.quicksight.delete_all_dashboards()
```

### awswrangler.quicksight.delete\_all\_data\_sources

`awswrangler.quicksight.delete_all_data_sources`(*account\_id*: str | None = None, *regex\_filter*: str | None = None, *boto3\_session*: Session | None = None) → None

Delete all data sources.

#### Parameters

- **account\_id** (str, optional) – If None, the account ID will be inferred from your boto3 session.
- **regex\_filter** (str, optional) – Regex regex\_filter that will delete all data sources with a match in their Name
- **boto3\_session** (boto3.Session(), optional) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

#### Returns

None.

#### Return type

None

## Examples

```
>>> import awswrangler as wr
>>> wr.quicksight.delete_all_data_sources()
```

### awswrangler.quicksight.delete\_all\_datasets

`awswrangler.quicksight.delete_all_datasets`(*account\_id*: str | None = None, *regex\_filter*: str | None = None, *boto3\_session*: Session | None = None) → None

Delete all datasets.

#### Parameters

- **account\_id** (str, optional) – If None, the account ID will be inferred from your boto3 session.
- **regex\_filter** (str, optional) – Regex regex\_filter that will delete all datasets with a match in their Name
- **boto3\_session** (boto3.Session(), optional) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

#### Returns

None.

#### Return type

None

## Examples

```
>>> import awswrangler as wr
>>> wr.quicksight.delete_all_datasets()
```

## awswrangler.quicksight.delete\_all\_templates

awswrangler.quicksight.**delete\_all\_templates**(*account\_id*: str | None = None, *regex\_filter*: str | None = None, *boto3\_session*: Session | None = None) → None

Delete all templates.

### Parameters

- **account\_id** (str, optional) – If None, the account ID will be inferred from your boto3 session.
- **regex\_filter** (str, optional) – Regex regex\_filter that will delete all templates with a match in their Name
- **boto3\_session** (boto3.Session(), optional) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

None.

### Return type

None

## Examples

```
>>> import awswrangler as wr
>>> wr.quicksight.delete_all_templates()
```

## awswrangler.quicksight.delete\_dashboard

awswrangler.quicksight.**delete\_dashboard**(*name*: str | None = None, *dashboard\_id*: str | None = None, *version\_number*: int | None = None, *account\_id*: str | None = None, *boto3\_session*: Session | None = None) → None

Delete a dashboard.

---

**Note:** You must pass a not None name or dashboard\_id argument.

---

### Parameters

- **name** (str, optional) – Dashboard name.
- **dashboard\_id** (str, optional) – The ID for the dashboard.
- **version\_number** (int, optional) – The version number of the dashboard. If the version number property is provided, only the specified version of the dashboard is deleted.
- **account\_id** (str, optional) – If None, the account ID will be inferred from your boto3 session.

- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

None.

**Return type**

None

**Examples**

```
>>> import awswrangler as wr
>>> wr.quicksight.delete_dashboard(name="...")
```

**awswrangler.quicksight.delete\_data\_source**

`awswrangler.quicksight.delete_data_source(name: str | None = None, data_source_id: str | None = None, account_id: str | None = None, boto3_session: Session | None = None) → None`

Delete a data source.

---

**Note:** You must pass a not None name or data\_source\_id argument.

---

**Parameters**

- **name** (*str*, *optional*) – Dashboard name.
- **data\_source\_id** (*str*, *optional*) – The ID for the data source.
- **account\_id** (*str*, *optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

None.

**Return type**

None

**Examples**

```
>>> import awswrangler as wr
>>> wr.quicksight.delete_data_source(name="...")
```

## awswrangler.quicksight.delete\_dataset

```
awswrangler.quicksight.delete_dataset(name: str | None = None, dataset_id: str | None = None,  
                                      account_id: str | None = None, boto3_session: Session | None =  
                                      None) → None
```

Delete a dataset.

---

**Note:** You must pass a not None name or dataset\_id argument.

---

### Parameters

- **name** (*str, optional*) – Dashboard name.
- **dataset\_id** (*str, optional*) – The ID for the dataset.
- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

None.

### Return type

None

## Examples

```
>>> import awswrangler as wr  
>>> wr.quicksight.delete_dataset(name="...")
```

## awswrangler.quicksight.delete\_template

```
awswrangler.quicksight.delete_template(name: str | None = None, template_id: str | None = None,  
                                         version_number: int | None = None, account_id: str | None =  
                                         None, boto3_session: Session | None = None) → None
```

Delete a template.

---

**Note:** You must pass a not None name or template\_id argument.

---

### Parameters

- **name** (*str, optional*) – Dashboard name.
- **template\_id** (*str, optional*) – The ID for the dashboard.
- **version\_number** (*int, optional*) – Specifies the version of the template that you want to delete. If you don't provide a version number, it deletes all versions of the template.
- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.

- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

None.

**Return type**

None

**Examples**

```
>>> import awswrangler as wr
>>> wr.quicksight.delete_template(name="...")
```

## awswrangler.quicksight.describe\_dashboard

```
awswrangler.quicksight.describe_dashboard(name: str | None = None, dashboard_id: str | None = None, account_id: str | None = None, boto3_session: Session | None = None) → Dict[str, Any]
```

Describe a QuickSight dashboard by name or ID.

---

**Note:** You must pass a not None name or dashboard\_id argument.

---

**Parameters**

- **name** (*str*, *optional*) – Dashboard name.
- **dashboard\_id** (*str*, *optional*) – Dashboard ID.
- **account\_id** (*str*, *optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Dashboard Description.

**Return type**

Dict[str, Any]

**Examples**

```
>>> import awswrangler as wr
>>> description = wr.quicksight.describe_dashboard(name="my-dashboard")
```

## awswrangler.quicksight.describe\_data\_source

```
awswrangler.quicksight.describe_data_source(name: str | None = None, data_source_id: str | None = None, account_id: str | None = None, boto3_session: Session | None = None) → Dict[str, Any]
```

Describe a QuickSight data source by name or ID.

---

**Note:** You must pass a not None name or data\_source\_id argument.

---

### Parameters

- **name** (*str, optional*) – Data source name.
- **data\_source\_id** (*str, optional*) – Data source ID.
- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Data source Description.

### Return type

Dict[str, Any]

## Examples

```
>>> import awswrangler as wr
>>> description = wr.quicksight.describe_data_source("...")
```

## awswrangler.quicksight.describe\_data\_source\_permissions

```
awswrangler.quicksight.describe_data_source_permissions(name: str | None = None, data_source_id: str | None = None, account_id: str | None = None, boto3_session: Session | None = None) → Dict[str, Any]
```

Describe a QuickSight data source permissions by name or ID.

---

**Note:** You must pass a not None name or data\_source\_id argument.

---

### Parameters

- **name** (*str, optional*) – Data source name.
- **data\_source\_id** (*str, optional*) – Data source ID.
- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session(), optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Data source Permissions Description.

**Return type**

Dict[str, Any]

**Examples**

```
>>> import awswrangler as wr
>>> description = wr.quicksight.describe_data_source_permissions("my-data-source")
```

**awswrangler.quicksight.describe\_dataset**

`awswrangler.quicksight.describe_dataset(name: str | None = None, dataset_id: str | None = None, account_id: str | None = None, boto3_session: Session | None = None) → Dict[str, Any]`

Describe a QuickSight dataset by name or ID.

---

**Note:** You must pass a not None `name` or `dataset_id` argument.

---

**Parameters**

- `name (str, optional)` – Dataset name.
- `dataset_id (str, optional)` – Dataset ID.
- `account_id (str, optional)` – If None, the account ID will be inferred from your boto3 session.
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

**Returns**

Dataset Description.

**Return type**

Dict[str, Any]

**Examples**

```
>>> import awswrangler as wr
>>> description = wr.quicksight.describe_dataset("my-dataset")
```

## awswrangler.quicksight.describe\_ingestion

```
awswrangler.quicksight.describe_ingestion(ingestion_id: str, dataset_name: str | None = None,  
                                             dataset_id: str | None = None, account_id: str | None = None,  
                                             boto3_session: Session | None = None) → Dict[str, Any]
```

Describe a QuickSight ingestion by ID.

---

**Note:** You must pass a not None value for `dataset_name` or `dataset_id` argument.

---

### Parameters

- `ingestion_id (str)` – Ingestion ID.
- `dataset_name (str, optional)` – Dataset name.
- `dataset_id (str, optional)` – Dataset ID.
- `account_id (str, optional)` – If None, the account ID will be inferred from your boto3 session.
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

### Returns

Ingestion Description.

### Return type

Dict[str, Any]

## Examples

```
>>> import awswrangler as wr  
>>> description = wr.quicksight.describe_dataset(ingestion_id="...", dataset_name="...")  
...
```

## awswrangler.quicksight.get\_dashboard\_id

```
awswrangler.quicksight.get_dashboard_id(name: str, account_id: str | None = None, boto3_session:  
                                         Session | None = None) → str
```

Get QuickSight dashboard ID given a name and fails if there is more than 1 ID associated with this name.

### Parameters

- `name (str)` – Dashboard name.
- `account_id (str, optional)` – If None, the account ID will be inferred from your boto3 session.
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if `boto3_session` receive None.

### Returns

Dashboard ID.

### Return type

str

## Examples

```
>>> import awswrangler as wr
>>> my_id = wr.quicksight.get_dashboard_id(name="...")
```

### `awswrangler.quicksight.get_dashboard_ids`

`awswrangler.quicksight.get_dashboard_ids(name: str, account_id: str | None = None, boto3_session: Session | None = None) → List[str]`

Get QuickSight dashboard IDs given a name.

---

**Note:** This function returns a list of ID because Quicksight accepts duplicated dashboard names, so you may have more than 1 ID for a given name.

---

#### Parameters

- **name** (`str`) – Dashboard name.
- **account\_id** (`str, optional`) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (`boto3.Session(), optional`) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

#### Returns

Dashboard IDs.

#### Return type

`List[str]`

## Examples

```
>>> import awswrangler as wr
>>> ids = wr.quicksight.get_dashboard_ids(name="...")
```

### `awswrangler.quicksight.get_data_source_arn`

`awswrangler.quicksight.get_data_source_arn(name: str, account_id: str | None = None, boto3_session: Session | None = None) → str`

Get QuickSight data source ARN given a name and fails if there is more than 1 ARN associated with this name.

---

**Note:** This function returns a list of ARNs because Quicksight accepts duplicated data source names, so you may have more than 1 ARN for a given name.

---

#### Parameters

- **name** (`str`) – Data source name.
- **account\_id** (`str, optional`) – If None, the account ID will be inferred from your boto3 session.

- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Data source ARN.

**Return type**

str

**Examples**

```
>>> import awswrangler as wr
>>> arn = wr.quicksight.get_data_source_arn("...")
```

**awswrangler.quicksight.get\_data\_source\_arns**

`awswrangler.quicksight.get_data_source_arns(name: str, account_id: str | None = None, boto3_session: Session | None = None) → List[str]`

Get QuickSight Data source ARNs given a name.

---

**Note:** This function returns a list of ARNs because Quicksight accepts duplicated data source names, so you may have more than 1 ARN for a given name.

---

**Parameters**

- **name** (*str*) – Data source name.
- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Data source ARNs.

**Return type**

List[str]

**Examples**

```
>>> import awswrangler as wr
>>> arns = wr.quicksight.get_data_source_arns(name="...")
```

## awswrangler.quicksight.get\_data\_source\_id

```
awswrangler.quicksight.get_data_source_id(name: str, account_id: str | None = None, boto3_session: Session | None = None) → str
```

Get QuickSight data source ID given a name and fails if there is more than 1 ID associated with this name.

### Parameters

- **name** (*str*) – Data source name.
- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Dataset ID.

### Return type

*str*

## Examples

```
>>> import awswrangler as wr
>>> my_id = wr.quicksight.get_data_source_id(name="...")
```

## awswrangler.quicksight.get\_data\_source\_ids

```
awswrangler.quicksight.get_data_source_ids(name: str, account_id: str | None = None, boto3_session: Session | None = None) → List[str]
```

Get QuickSight data source IDs given a name.

---

**Note:** This function returns a list of ID because Quicksight accepts duplicated data source names, so you may have more than 1 ID for a given name.

---

### Parameters

- **name** (*str*) – Data source name.
- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Data source IDs.

### Return type

*List[str]*

## Examples

```
>>> import awswrangler as wr
>>> ids = wr.quicksight.get_data_source_ids(name="...")
```

## awswrangler.quicksight.get\_dataset\_id

awswrangler.quicksight.get\_dataset\_id(*name*: str, *account\_id*: str | None = None, *boto3\_session*: Session | None = None) → str

Get QuickSight Dataset ID given a name and fails if there is more than 1 ID associated with this name.

### Parameters

- **name** (str) – Dataset name.
- **account\_id** (str, optional) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (boto3.Session(), optional) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Dataset ID.

### Return type

str

## Examples

```
>>> import awswrangler as wr
>>> my_id = wr.quicksight.get_dataset_id(name="...")
```

## awswrangler.quicksight.get\_dataset\_ids

awswrangler.quicksight.get\_dataset\_ids(*name*: str, *account\_id*: str | None = None, *boto3\_session*: Session | None = None) → List[str]

Get QuickSight dataset IDs given a name.

---

**Note:** This function returns a list of ID because Quicksight accepts duplicated datasets names, so you may have more than 1 ID for a given name.

---

### Parameters

- **name** (str) – Dataset name.
- **account\_id** (str, optional) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (boto3.Session(), optional) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Datasets IDs.

**Return type**

List[str]

**Examples**

```
>>> import awswrangler as wr
>>> ids = wr.quicksight.get_dataset_ids(name="...")
```

**awswrangler.quicksight.get\_template\_id**

`awswrangler.quicksight.get_template_id(name: str, account_id: str | None = None, boto3_session: Session | None = None) → str`

Get QuickSight template ID given a name and fails if there is more than 1 ID associated with this name.

**Parameters**

- **name** (*str*) – Template name.
- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Template ID.

**Return type**

str

**Examples**

```
>>> import awswrangler as wr
>>> my_id = wr.quicksight.get_template_id(name="...")
```

**awswrangler.quicksight.get\_template\_ids**

`awswrangler.quicksight.get_template_ids(name: str, account_id: str | None = None, boto3_session: Session | None = None) → List[str]`

Get QuickSight template IDs given a name.

---

**Note:** This function returns a list of ID because Quicksight accepts duplicated templates names, so you may have more than 1 ID for a given name.

**Parameters**

- **name** (*str*) – Template name.
- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.

- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Template IDs.

**Return type**

List[str]

**Examples**

```
>>> import awswrangler as wr
>>> ids = wr.quicksight.get_template_ids(name="...")
```

**awswrangler.quicksight.list\_dashboards**

`awswrangler.quicksight.list_dashboards`(*account\_id*: str | None = None, *boto3\_session*: Session | None = None) → List[Dict[str, Any]]

List dashboards in an AWS account.

**Parameters**

- **account\_id** (*str*, *optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Dashboards.

**Return type**

List[Dict[str, Any]]

**Examples**

```
>>> import awswrangler as wr
>>> dashboards = wr.quicksight.list_dashboards()
```

**awswrangler.quicksight.list\_data\_sources**

`awswrangler.quicksight.list_data_sources`(*account\_id*: str | None = None, *boto3\_session*: Session | None = None) → List[Dict[str, Any]]

List all QuickSight Data sources summaries.

**Parameters**

- **account\_id** (*str*, *optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Data sources summaries.

**Return type**

List[Dict[str, Any]]

**Examples**

```
>>> import awswrangler as wr
>>> sources = wr.quicksight.list_data_sources()
```

**awswrangler.quicksight.list\_datasets**

`awswrangler.quicksight.list_datasets(account_id: str | None = None, boto3_session: Session | None = None) → List[Dict[str, Any]]`

List all QuickSight datasets summaries.

**Parameters**

- **account\_id (str, optional)** – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Datasets summaries.

**Return type**

List[Dict[str, Any]]

**Examples**

```
>>> import awswrangler as wr
>>> datasets = wr.quicksight.list_datasets()
```

**awswrangler.quicksight.list\_groups**

`awswrangler.quicksight.list_groups(namespace: str = 'default', account_id: str | None = None, boto3_session: Session | None = None) → List[Dict[str, Any]]`

List all QuickSight Groups.

**Parameters**

- **namespace (str)** – The namespace. Currently, you should set this to default .
- **account\_id (str, optional)** – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Groups.

**Return type**

List[Dict[str, Any]]

## Examples

```
>>> import awswrangler as wr
>>> groups = wr.quicksight.list_groups()
```

### awswrangler.quicksight.list\_group\_memberships

```
awswrangler.quicksight.list_group_memberships(group_name: str, namespace: str = 'default',
                                                account_id: str | None = None, boto3_session: Session | None = None) → List[Dict[str, Any]]
```

List all QuickSight Group memberships.

#### Parameters

- **group\_name** (*str*) – The name of the group that you want to see a membership list of.
- **namespace** (*str*) – The namespace. Currently, you should set this to default .
- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

#### Returns

Group memberships.

#### Return type

List[Dict[str, Any]]

## Examples

```
>>> import awswrangler as wr
>>> memberships = wr.quicksight.list_group_memberships()
```

### awswrangler.quicksight.list\_iam\_policy\_assignments

```
awswrangler.quicksight.list_iam_policy_assignments(status: str | None = None, namespace: str = 'default',
                                                      account_id: str | None = None,
                                                      boto3_session: Session | None = None) → List[Dict[str, Any]]
```

List IAM policy assignments in the current Amazon QuickSight account.

#### Parameters

- **status** (*str, optional*) – The status of the assignments. ‘ENABLED’|‘DRAFT’|‘DISABLED’
- **namespace** (*str*) – The namespace. Currently, you should set this to default .
- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

IAM policy assignments.

**Return type**

List[Dict[str, Any]]

**Examples**

```
>>> import awswrangler as wr
>>> assigns = wr.quicksight.list_iam_policy_assignments()
```

**`awswrangler.quicksight.list_iam_policy_assignments_for_user`**

`awswrangler.quicksight.list_iam_policy_assignments_for_user`(*user\_name*: str, *namespace*: str = 'default', *account\_id*: str | None = None, *boto3\_session*: Session | None = None) → List[Dict[str, Any]]

List all the IAM policy assignments.

Including the Amazon Resource Names (ARNs) for the IAM policies assigned to the specified user and group or groups that the user belongs to.

**Parameters**

- **`user_name` (str)** – The name of the user.
- **`namespace` (str)** – The namespace. Currently, you should set this to default .
- **`account_id` (str, optional)** – If None, the account ID will be inferred from your boto3 session.
- **`boto3_session` (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

IAM policy assignments.

**Return type**

List[Dict[str, Any]]

**Examples**

```
>>> import awswrangler as wr
>>> assigns = wr.quicksight.list_iam_policy_assignments_for_user()
```

## awswrangler.quicksight.list\_ingestions

```
awswrangler.quicksight.list_ingestions(dataset_name: str | None = None, dataset_id: str | None = None, account_id: str | None = None, boto3_session: Session | None = None) → List[Dict[str, Any]]
```

List the history of SPICE ingestions for a dataset.

### Parameters

- **dataset\_name** (*str, optional*) – Dataset name.
- **dataset\_id** (*str, optional*) – The ID of the dataset used in the ingestion.
- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

IAM policy assignments.

### Return type

List[Dict[str, Any]]

## Examples

```
>>> import awswrangler as wr
>>> ingestions = wr.quicksight.list_ingestions()
```

## awswrangler.quicksight.list\_templates

```
awswrangler.quicksight.list_templates(account_id: str | None = None, boto3_session: Session | None = None) → List[Dict[str, Any]]
```

List all QuickSight templates.

### Parameters

- **account\_id** (*str, optional*) – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session** (*boto3.Session()*, *optional*) – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Templates summaries.

### Return type

List[Dict[str, Any]]

## Examples

```
>>> import awswrangler as wr
>>> templates = wr.quicksight.list_templates()
```

## awswrangler.quicksight.list\_users

`awswrangler.quicksight.list_users(namespace: str = 'default', account_id: str | None = None, boto3_session: Session | None = None) → List[Dict[str, Any]]`

Return a list of all of the Amazon QuickSight users belonging to this account.

### Parameters

- **namespace (str)** – The namespace. Currently, you should set this to default.
- **account\_id (str, optional)** – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Groups.

### Return type

List[Dict[str, Any]]

## Examples

```
>>> import awswrangler as wr
>>> users = wr.quicksight.list_users()
```

## awswrangler.quicksight.list\_user\_groups

`awswrangler.quicksight.list_user_groups(user_name: str, namespace: str = 'default', account_id: str | None = None, boto3_session: Session | None = None) → List[Dict[str, Any]]`

List the Amazon QuickSight groups that an Amazon QuickSight user is a member of.

### Parameters

- **user\_name (str:)** – The Amazon QuickSight user name that you want to list group memberships for.
- **namespace (str)** – The namespace. Currently, you should set this to default .
- **account\_id (str, optional)** – If None, the account ID will be inferred from your boto3 session.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

### Returns

Groups.

**Return type**

List[Dict[str, Any]]

**Examples**

```
>>> import awswrangler as wr
>>> groups = wr.quicksight.list_user_groups()
```

## 1.9.18 AWS STS

<code>get_account_id([boto3_session])</code>	Get Account ID.
<code>get_current_identity_arn([boto3_session])</code>	Get current user/role ARN.
<code>get_current_identity_name([boto3_session])</code>	Get current user/role name.

### `awswrangler.sts.get_account_id`

`awswrangler.sts.get_account_id(boto3_session: Session | None = None) → str`

Get Account ID.

**Parameters**

`boto3_session(boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

Account ID.

**Return type**

str

**Examples**

```
>>> import awswrangler as wr
>>> account_id = wr.sts.get_account_id()
```

### `awswrangler.sts.get_current_identity_arn`

`awswrangler.sts.get_current_identity_arn(boto3_session: Session | None = None) → str`

Get current user/role ARN.

**Parameters**

`boto3_session(boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

**Returns**

User/role ARN.

**Return type**

str

## Examples

```
>>> import awswrangler as wr
>>> arn = wr.sts.get_current_identity_arn()
```

### `awswrangler.sts.get_current_identity_name`

`awswrangler.sts.get_current_identity_name(boto3_session: Session | None = None) → str`

Get current user/role name.

#### Parameters

`boto3_session(boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

#### Returns

User/role name.

#### Return type

str

## Examples

```
>>> import awswrangler as wr
>>> name = wr.sts.get_current_identity_name()
```

## 1.9.19 AWS Secrets Manager

<code>get_secret(name[, boto3_session])</code>	Get secret value.
<code>get_secret_json(name[, boto3_session])</code>	Get JSON secret value.

### `awswrangler.secretsmanager.get_secret`

`awswrangler.secretsmanager.get_secret(name: str, boto3_session: Session | None = None) → str | bytes`

Get secret value.

#### Parameters

- `name (str:)` – Specifies the secret containing the version that you want to retrieve. You can specify either the Amazon Resource Name (ARN) or the friendly name of the secret.
- `boto3_session (boto3.Session(), optional)` – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

#### Returns

Secret value.

#### Return type

Union[str, bytes]

## Examples

```
>>> import awswrangler as wr
>>> value = wr.secretsmanager.get_secret("my-secret")
```

### awswrangler.secretsmanager.get\_secret\_json

awswrangler.secretsmanager.get\_secret\_json(*name: str, boto3\_session: Session | None = None*) → Dict[str, Any]

Get JSON secret value.

#### Parameters

- **name (str:)** – Specifies the secret containing the version that you want to retrieve. You can specify either the Amazon Resource Name (ARN) or the friendly name of the secret.
- **boto3\_session (boto3.Session(), optional)** – Boto3 Session. The default boto3 session will be used if boto3\_session receive None.

#### Returns

Secret JSON value parsed as a dictionary.

#### Return type

Dict[str, Any]

## Examples

```
>>> import awswrangler as wr
>>> value = wr.secretsmanager.get_secret_json("my-secret-with-json-content")
```

## 1.9.20 Amazon Chime

---

`post_message(webhook, message)`

Send message on an existing Chime Chat rooms.

---

### awswrangler.chime.post\_message

awswrangler.chime.post\_message(*webhook: str, message: str*) → Any | None

Send message on an existing Chime Chat rooms.

:param : Webhook: This contains all the authentication information to send the message :type : param webhook : webhook :param : The actual message which needs to be posted on Slack channel :type : param message : message

#### Returns

Represents the response from Chime

#### Return type

dict

## 1.9.21 Typing

<code>GlueTableSettings</code>	Typed dictionary defining the settings for the Glue table.
<code>AthenaCTASSettings</code>	Typed dictionary defining the settings for using CTAS (Create Table As Statement).
<code>AthenaUNLOADSettings</code>	Typed dictionary defining the settings for using UNLOAD.
<code>AthenaCacheSettings</code>	Typed dictionary defining the settings for using cached Athena results.
<code>AthenaPartitionProjectionSettings</code>	Typed dictionary defining the settings for Athena Partition Projection.
<code>RaySettings</code>	Typed dictionary defining the settings for distributing calls using Ray.
<code>RayReadParquetSettings</code>	Typed dictionary defining the settings for distributing reading calls using Ray.
<code>_S3WriteDataReturnValue</code>	Typed dictionary defining the dictionary returned by S3 write functions.

### GlueTableSettings

```
class awswrangler.typing.GlueTableSettings
```

Bases: TypedDict

Typed dictionary defining the settings for the Glue table.

#### Attributes

<code>table_type</code>	The type of the Glue Table.
<code>transaction_id</code>	The ID of the transaction when writing to a Governed Table.
<code>description</code>	Table description
<code>parameters</code>	Key/value pairs to tag the table.
<code>columns_comments</code>	Columns names and the related comments (e.g.
<code>regular_partitions</code>	Create regular partitions (Non projected partitions) on Glue Catalog.

#### Attributes Documentation

**table\_type: NotRequired[Literal['EXTERNAL\_TABLE', 'GOVERNED']]**

The type of the Glue Table. Set to EXTERNAL\_TABLE if None.

**transaction\_id: NotRequired[str]**

The ID of the transaction when writing to a Governed Table.

**description: NotRequired[str]**

Table description

Type

Glue/Athena catalog

**parameters: NotRequired[Dict[str, str]]**

Key/value pairs to tag the table.

**Type**

Glue/Athena catalog

**columns\_comments: NotRequired[Dict[str, str]]**

Columns names and the related comments (e.g. {‘col0’: ‘Column 0.’, ‘col1’: ‘Column 1.’, ‘col2’: ‘Partition.’}).

**regular\_partitions: NotRequired[bool]**

Create regular partitions (Non projected partitions) on Glue Catalog. Disable when you will work only with Partition Projection. Keep enabled even when working with projections is useful to keep Redshift Spectrum working with the regular partitions.

## AthenaCTASSettings

`class awswrangler.typing.AthenaCTASSettings`

Bases: TypedDict

Typed dictionary defining the settings for using CTAS (Create Table As Statement).

## Attributes

<code>database</code>	The name of the alternative database where the CTAS temporary table is stored.
<code>temp_table_name</code>	The name of the temporary table and also the directory name on S3 where the CTAS result is stored.
<code>bucketing_info</code>	Tuple consisting of the column names used for bucketing as the first element and the number of buckets as the second element.
<code>compression</code>	Write compression for the temporary table where the CTAS result is stored.

## Attributes Documentation

**database: NotRequired[str]**

The name of the alternative database where the CTAS temporary table is stored. If None, the default `database` is used.

**temp\_table\_name: NotRequired[str]**

The name of the temporary table and also the directory name on S3 where the CTAS result is stored. If None, it will use the follow random pattern: `f"temp_table_{uuid.uuid4().hex()}"`. On S3 this directory will be under under the pattern: `f"/s3_output/{ctas_temp_table_name}/"`.

**bucketing\_info: NotRequired[Tuple[List[str], int]]**

Tuple consisting of the column names used for bucketing as the first element and the number of buckets as the second element. Only `str`, `int` and `bool` are supported as column data types for bucketing.

**compression: NotRequired[str]**

Write compression for the temporary table where the CTAS result is stored. Corresponds to the `write_compression` parameters for CREATE TABLE AS statement in Athena.

## AthenaUNLOADSettings

```
class awswrangler.typing.AthenaUNLOADSettings
Bases: TypedDict
Typed dictionary defining the settings for using UNLOAD.
```

### Attributes

<code>file_format</code>	Specifies the file format of the output.
<code>compression</code>	This option is specific to the ORC and Parquet formats.
<code>field_delimiter</code>	Specifies a single-character field delimiter for files in CSV, TSV, and other text formats.
<code>partitioned_by</code>	A list of columns by which the output is partitioned.

### Attributes Documentation

#### `file_format: NotRequired[str]`

Specifies the file format of the output. Only *PARQUET* is currently supported.

#### `compression: NotRequired[str]`

This option is specific to the ORC and Parquet formats. For ORC, possible values are lz4, snappy, zlib, or zstd. For Parquet, possible values are gzip or snappy. For ORC, the default is zlib, and for Parquet, the default is gzip.

#### `field_delimiter: NotRequired[str]`

Specifies a single-character field delimiter for files in CSV, TSV, and other text formats.

#### `partitioned_by: NotRequired[List[str]]`

A list of columns by which the output is partitioned.

## AthenaCacheSettings

```
class awswrangler.typing.AthenaCacheSettings
```

Bases: TypedDict

Typed dictionary defining the settings for using cached Athena results.

### Attributes

<code>max_cache_seconds</code>	awswrangler can look up in Athena's history if this table has been read before.
<code>max_cache_query_inspections</code>	Max number of queries that will be inspected from the history to try to find some result to reuse.
<code>max_remote_cache_entries</code>	Max number of queries that will be retrieved from AWS for cache inspection.
<code>max_local_cache_entries</code>	Max number of queries for which metadata will be cached locally.

## Attributes Documentation

### `max_cache_seconds: NotRequired[int]`

awswrangler can look up in Athena's history if this table has been read before. If so, and its completion time is less than `max_cache_seconds` before now, awswrangler skips query execution and just returns the same results as last time.

### `max_cache_query_inspections: NotRequired[int]`

Max number of queries that will be inspected from the history to try to find some result to reuse. The bigger the number of inspection, the bigger will be the latency for not cached queries. Only takes effect if `max_cache_seconds > 0`.

### `max_remote_cache_entries: NotRequired[int]`

Max number of queries that will be retrieved from AWS for cache inspection. The bigger the number of inspection, the bigger will be the latency for not cached queries. Only takes effect if `max_cache_seconds > 0` and default value is 50.

### `max_local_cache_entries: NotRequired[int]`

Max number of queries for which metadata will be cached locally. This will reduce the latency and also enables keeping more than `max_remote_cache_entries` available for the cache. This value should not be smaller than `max_remote_cache_entries`. Only takes effect if `max_cache_seconds > 0` and default value is 100.

## AthenaPartitionProjectionSettings

### `class awswrangler.typing.AthenaPartitionProjectionSettings`

Bases: `TypedDict`

Typed dictionary defining the settings for Athena Partition Projection.

<https://docs.aws.amazon.com/athena/latest/ug/partition-projection.html>

## Attributes

<code>projection_types</code>	Dictionary of partitions names and Athena projections types.
<code>projection_ranges</code>	Dictionary of partitions names and Athena projections ranges.
<code>projection_values</code>	Dictionary of partitions names and Athena projections values.
<code>projection_intervals</code>	Dictionary of partitions names and Athena projections intervals.
<code>projection_digits</code>	Dictionary of partitions names and Athena projections digits.
<code>projection_formats</code>	Dictionary of partitions names and Athena projections formats.
<code>projection_storage_location_template</code>	Value which allows Athena to properly map partition values if the S3 file locations do not follow a typical <code>.../column=value/...</code> pattern.

## Attributes Documentation

**projection\_types: NotRequired[Dict[str, Literal['enum', 'integer', 'date', 'injected']]]**

Dictionary of partitions names and Athena projections types. Valid types: “enum”, “integer”, “date”, “injected” <https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html> (e.g. {‘col\_name’: ‘enum’, ‘col2\_name’: ‘integer’})

**projection\_ranges: NotRequired[Dict[str, str]]**

Dictionary of partitions names and Athena projections ranges. <https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html> (e.g. {‘col\_name’: ‘0,10’, ‘col2\_name’: ‘-1,8675309’})

**projection\_values: NotRequired[Dict[str, str]]**

Dictionary of partitions names and Athena projections values. <https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html> (e.g. {‘col\_name’: ‘A,B,Unknown’, ‘col2\_name’: ‘foo,boo,bar’})

**projection\_intervals: NotRequired[Dict[str, str]]**

Dictionary of partitions names and Athena projections intervals. <https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html> (e.g. {‘col\_name’: ‘1’, ‘col2\_name’: ‘5’})

**projection\_digits: NotRequired[Dict[str, str]]**

Dictionary of partitions names and Athena projections digits. <https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html> (e.g. {‘col\_name’: ‘1’, ‘col2\_name’: ‘2’})

**projection\_formats: NotRequired[Dict[str, str]]**

Dictionary of partitions names and Athena projections formats. <https://docs.aws.amazon.com/athena/latest/ug/partition-projection-supported-types.html> (e.g. {‘col\_date’: ‘yyyy-MM-dd’, ‘col2\_timestamp’: ‘yyyy-MM-dd HH:mm:ss’})

**projection\_storage\_location\_template: NotRequired[str]**

Value which is allows Athena to properly map partition values if the S3 file locations do not follow a typical .../column=value/... pattern. <https://docs.aws.amazon.com/athena/latest/ug/partition-projection-setting-up.html> (e.g. s3://bucket/table\_root/a=\${a}/\${b}/some\_static\_subdirectory/\${c}/)

## RaySettings

**class awswrangler.typing.RaySettings**

Bases: TypedDict

Typed dictionary defining the settings for distributing calls using Ray.

## Attributes

<i>parallelism</i>	The requested parallelism of the read.
--------------------	--

## Attributes Documentation

### **parallelism: NotRequired[int]**

The requested parallelism of the read. Parallelism may be limited by the number of files of the dataset.  
Auto-detect by default.

## RayReadParquetSettings

### **class awswrangler.typing.RayReadParquetSettings**

Bases: dict

Typed dictionary defining the settings for distributing reading calls using Ray.

## Attributes

<i>bulk_read</i>	True to enable a faster reading of a large number of Parquet files.
------------------	---

## Attributes Documentation

### **parallelism: NotRequired[int]**

### **bulk\_read: NotRequired[bool]**

True to enable a faster reading of a large number of Parquet files. Offers improved performance due to not gathering the file metadata in a single node. The drawback is that it does not offer schema resolution, so it should only be used when the Parquet files are all uniform.

## \_S3WriteDataReturnValue

### **class awswrangler.typing.\_S3WriteDataReturnValue**

Bases: TypedDict

Typed dictionary defining the dictionary returned by S3 write functions.

## Attributes

<i>paths</i>	List of all stored files paths on S3.
<i>partitions_values</i>	Dictionary of partitions added with keys as S3 path locations and values as a list of partitions values as str.

## Attributes Documentation

**paths: Required[List[str]]**

List of all stored files paths on S3.

**partitions\_values: Required[Dict[str, List[str]]]**

Dictionary of partitions added with keys as S3 path locations and values as a list of partitions values as str.

## 1.9.22 Global Configurations

<code>reset([item])</code>	Reset one or all (if None is received) configuration values.
<code>to_pandas()</code>	Load all configurations on a Pandas DataFrame.

### awswrangler.config.reset

`config.reset(item: str | None = None) → None`

Reset one or all (if None is received) configuration values.

#### Parameters

`item(str, optional)` – Configuration item name.

#### Returns

None.

#### Return type

None

### Examples

```
>>> import awswrangler as wr
>>> wr.config.reset("database") # Reset one specific configuration
>>> wr.config.reset() # Reset all
```

### awswrangler.config.to\_pandas

`config.to_pandas() → DataFrame`

Load all configurations on a Pandas DataFrame.

#### Returns

Configuration DataFrame.

#### Return type

pd.DataFrame

## Examples

```
>>> import awswrangler as wr  
>>> wr.config.to_pandas()
```

### 1.9.23 Distributed - Ray

`initialize_ray([address, redis_password, ...])`

Connect to an existing Ray cluster or start one and connect to it.

#### `awswrangler.distributed.ray.initialize_ray`

`awswrangler.distributed.ray.initialize_ray(address: str | None = None, redis_password: str | None = None, ignore_reinit_error: bool = True, include_dashboard: bool | None = False, configure_logging: bool = True, log_to_driver: bool = False, logging_level: int = 20, object_store_memory: int | None = None, cpu_count: int | None = None, gpu_count: int | None = None) → None`

Connect to an existing Ray cluster or start one and connect to it.

---

**Note:** This function has arguments which can be configured globally through `wr.config` or environment variables:

- `address`
- `redis_password`
- `ignore_reinit_error`
- `include_dashboard`
- `configure_logging`
- `log_to_driver`
- `logging_level`
- `object_store_memory`
- `cpu_count`
- `gpu_count`

Check out the [Global Configurations Tutorial](#) for details.

---

#### Parameters

- `address` (*Optional[str]*) – Address of the Ray cluster to connect to, by default `None`
- `redis_password` (*Optional[str]*) – Password to the Redis cluster, by default `None`
- `ignore_reinit_error` (`bool`) – If true, Ray suppress errors from calling `ray.init()` twice, by default `True`
- `include_dashboard` (*Optional[bool]*) – Boolean flag indicating whether or not to start the Ray dashboard, by default `False`

- **configure\_logging** (*Optional [bool]*) – Boolean flag indicating whether or not to enable logging, by default True
- **log\_to\_driver** (*bool*) – Boolean flag to enable routing of all worker logs to the driver, by default False
- **logging\_level** (*int*) – Logging level, defaults to logging.INFO. Ignored unless “configure\_logging” is True
- **object\_store\_memory** (*Optional [int]*) – The amount of memory (in bytes) to start the object store with, by default None
- **cpu\_count** (*Optional [int]*) – Number of CPUs to assign to each raylet, by default None
- **gpu\_count** (*Optional [int]*) – Number of GPUs to assign to each raylet, by default None



# INDEX

## Symbols

- `_S3WriteDataReturnValue` (*class in awswrangler.typing*), 408  
`__init__()` (*awswrangler.data\_api.rds.RdsDataApi method*), 321  
`__init__()` (*awswrangler.data\_api.redshift.RedshiftDataApi method*), 320
- A**
- `add_column()` (*in module awswrangler.catalog*), 214  
`add_csv_partitions()` (*in module awswrangler.catalog*), 215  
`add_parquet_partitions()` (*in module awswrangler.catalog*), 216  
`AthenaCacheSettings` (*class in awswrangler.typing*), 405  
`AthenaCTASSettings` (*class in awswrangler.typing*), 404  
`AthenaPartitionProjectionSettings` (*class in awswrangler.typing*), 406  
`AthenaUNLOADSettings` (*class in awswrangler.typing*), 405
- B**
- `bucketing_info` (*awswrangler.typing.AthenaCTASSettings attribute*), 404  
`build_spark_step()` (*in module awswrangler.emr*), 359  
`build_step()` (*in module awswrangler.emr*), 360  
`bulk_read` (*awswrangler.typing.RayReadParquetSettings attribute*), 408
- C**
- `cancel_ingestion()` (*in module awswrangler.quicksight*), 376  
`cancel_transaction()` (*in module awswrangler.lakeformation*), 279  
`columns_comments` (*awswrangler.typing.GlueTableSettings attribute*), 404  
`commit_transaction()` (*in module awswrangler.lakeformation*), 280  
`compression` (*awswrangler.typing.AthenaCTASSettings attribute*), 404  
`compression` (*awswrangler.typing.AthenaUNLOADSettings attribute*), 405  
`connect()` (*in module awswrangler.data\_api.rds*), 322  
`connect()` (*in module awswrangler.data\_api.redshift*), 320  
`connect()` (*in module awswrangler.mysql*), 304  
`connect()` (*in module awswrangler.neptune*), 338  
`connect()` (*in module awswrangler.opensearch*), 328  
`connect()` (*in module awswrangler.oracle*), 314  
`connect()` (*in module awswrangler.postgresql*), 299  
`connect()` (*in module awswrangler.redshift*), 283  
`connect()` (*in module awswrangler.sqlserver*), 309  
`connect_temp()` (*in module awswrangler.redshift*), 284  
`copy()` (*in module awswrangler.redshift*), 285  
`copy_from_files()` (*in module awswrangler.redshift*), 288  
`copy_objects()` (*in module awswrangler.s3*), 155  
`create_athena_bucket()` (*in module awswrangler.athena*), 252  
`create_athena_data_source()` (*in module awswrangler.quicksight*), 377  
`create_athena_dataset()` (*in module awswrangler.quicksight*), 378  
`create_cluster()` (*in module awswrangler.emr*), 361  
`create_collection()` (*in module awswrangler.opensearch*), 329  
`create_csv_table()` (*in module awswrangler.catalog*), 217  
`create_ctas_table()` (*in module awswrangler.athena*), 252  
`create_database()` (*in module awswrangler.catalog*), 220  
`create_database()` (*in module awswrangler.timestream*), 353  
`create_index()` (*in module awswrangler.opensearch*), 330  
`create_ingestion()` (*in module awswrangler*), 221

gler.quicksight), 380  
create\_json\_table() (in module awswrangler.catalog), 221  
create\_parquet\_table() (in module awswrangler.catalog), 224  
create\_recommendation\_ruleset() (in module awswrangler.data\_quality), 323  
create\_ruleset() (in module awswrangler.data\_quality), 324  
create\_table() (in module awswrangler.timestream), 354

## D

database (awswrangler.typing.AthenaCTASSettings attribute), 404  
databases() (in module awswrangler.catalog), 227  
delete\_all\_dashboards() (in module awswrangler.quicksight), 380  
delete\_all\_data\_sources() (in module awswrangler.quicksight), 381  
delete\_all\_datasets() (in module awswrangler.quicksight), 381  
delete\_all\_partitions() (in module awswrangler.catalog), 230  
delete\_all\_templates() (in module awswrangler.quicksight), 382  
delete\_column() (in module awswrangler.catalog), 227  
delete\_dashboard() (in module awswrangler.quicksight), 382  
delete\_data\_source() (in module awswrangler.quicksight), 383  
delete\_database() (in module awswrangler.catalog), 228  
delete\_database() (in module awswrangler.timestream), 355  
delete\_dataset() (in module awswrangler.quicksight), 384  
delete\_index() (in module awswrangler.opensearch), 331

delete\_items() (in module awswrangler.dynamodb), 342  
delete\_objects() (in module awswrangler.s3), 157  
delete\_partitions() (in module awswrangler.catalog), 229  
delete\_table() (in module awswrangler.timestream), 355  
delete\_table\_if\_exists() (in module awswrangler.catalog), 231  
delete\_template() (in module awswrangler.quicksight), 384  
describe\_dashboard() (in module awswrangler.quicksight), 385

describe\_data\_source() (in module awswrangler.quicksight), 386  
describe\_data\_source\_permissions() (in module awswrangler.quicksight), 386  
describe\_dataset() (in module awswrangler.quicksight), 387  
describe\_ingestion() (in module awswrangler.quicksight), 388  
describe\_log\_streams() (in module awswrangler.cloudwatch), 373  
describe\_objects() (in module awswrangler.s3), 158  
describe\_transaction() (in module awswrangler.lakeformation), 280  
description (awswrangler.typing.GlueTableSettings attribute), 403  
does\_object\_exist() (in module awswrangler.s3), 159  
does\_table\_exist() (in module awswrangler.catalog), 232  
download() (in module awswrangler.s3), 160  
drop\_duplicated\_columns() (in module awswrangler.catalog), 232

## E

evaluate\_ruleset() (in module awswrangler.data\_quality), 325  
execute\_gremlin() (in module awswrangler.neptune), 338  
execute\_opencypher() (in module awswrangler.neptune), 339  
execute\_sparql() (in module awswrangler.neptune), 339  
execute\_statement() (in module awswrangler.dynamodb), 343  
extend\_transaction() (in module awswrangler.lakeformation), 281  
extract\_athena\_types() (in module awswrangler.catalog), 233

## F

field\_delimiter (awswrangler.typing.AthenaUNLOADSettings attribute), 405  
file\_format (awswrangler.typing.AthenaUNLOADSettings attribute), 405  
filter\_log\_events() (in module awswrangler.cloudwatch), 374  
flatten\_nested\_df() (in module awswrangler.neptune), 340

## G

generate\_create\_query() (in module awswrangler.athena), 254

get\_account\_id() (in module `awswrangler.sts`), 400  
 get\_bucket\_region() (in module `awswrangler.s3`), 161  
 get\_cluster\_state() (in module `awswrangler.emr`), 366  
 get\_columns\_comments() (in module `awswrangler.catalog`), 234  
 get\_csv\_partitions() (in module `awswrangler.catalog`), 235  
 get\_current\_identity\_arn() (in module `awswrangler.sts`), 400  
 get\_current\_identity\_name() (in module `awswrangler.sts`), 401  
 get\_dashboard\_id() (in module `awswrangler.quicksight`), 388  
 get\_dashboard\_ids() (in module `awswrangler.quicksight`), 389  
 get\_data\_source\_arn() (in module `awswrangler.quicksight`), 389  
 get\_data\_source\_arns() (in module `awswrangler.quicksight`), 390  
 get\_data\_source\_id() (in module `awswrangler.quicksight`), 391  
 get\_data\_source\_ids() (in module `awswrangler.quicksight`), 391  
 get\_databases() (in module `awswrangler.catalog`), 236  
 get\_dataset\_id() (in module `awswrangler.quicksight`), 392  
 get\_dataset\_ids() (in module `awswrangler.quicksight`), 392  
 get\_named\_query\_statement() (in module `awswrangler.athena`), 258  
 get\_parquet\_partitions() (in module `awswrangler.catalog`), 236  
 get\_partitions() (in module `awswrangler.catalog`), 238  
 get\_query\_columns\_types() (in module `awswrangler.athena`), 255  
 get\_query\_execution() (in module `awswrangler.athena`), 256  
 get\_query\_executions() (in module `awswrangler.athena`), 256  
 get\_query\_results() (in module `awswrangler.athena`), 257  
 get\_ruleset() (in module `awswrangler.data_quality`), 327  
 get\_secret() (in module `awswrangler.secretsmanager`), 401  
 get\_secret\_json() (in module `awswrangler.secretsmanager`), 402  
 get\_step\_state() (in module `awswrangler.emr`), 366  
 get\_table() (in module `awswrangler.dynamodb`), 344  
 get\_table\_description() (in module `awswrangler.catalog`), 239  
 get\_table\_location() (in module `awswrangler.catalog`), 240  
 get\_table\_number\_of\_versions() (in module `awswrangler.catalog`), 241  
 get\_table\_parameters() (in module `awswrangler.catalog`), 241  
 get\_table\_types() (in module `awswrangler.catalog`), 242  
 get\_table\_versions() (in module `awswrangler.catalog`), 243  
 get\_tables() (in module `awswrangler.catalog`), 244  
 get\_template\_id() (in module `awswrangler.quicksight`), 393  
 get\_template\_ids() (in module `awswrangler.quicksight`), 393  
 get\_work\_group() (in module `awswrangler.athena`), 259  
 GlueTableSettings (class in `awswrangler.typing`), 403  
 |  
 index\_csv() (in module `awswrangler.opensearch`), 332  
 index\_df() (in module `awswrangler.opensearch`), 334  
 index\_documents() (in module `awswrangler.opensearch`), 333  
 index\_json() (in module `awswrangler.opensearch`), 335  
 initialize\_ray() (in module `awswrangler.distributed.ray`), 410  
 L  
 list\_buckets() (in module `awswrangler.s3`), 161  
 list\_dashboards() (in module `awswrangler.quicksight`), 394  
 list\_data\_sources() (in module `awswrangler.quicksight`), 394  
 list\_datasets() (in module `awswrangler.quicksight`), 395  
 list\_directories() (in module `awswrangler.s3`), 162  
 list\_group\_memberships() (in module `awswrangler.quicksight`), 396  
 list\_groups() (in module `awswrangler.quicksight`), 395  
 list\_iam\_policy\_assignments() (in module `awswrangler.quicksight`), 396  
 list\_iam\_policy\_assignments\_for\_user() (in module `awswrangler.quicksight`), 397  
 list\_ingestions() (in module `awswrangler.quicksight`), 398  
 list\_objects() (in module `awswrangler.s3`), 163  
 list\_query\_executions() (in module `awswrangler.athena`), 259  
 list\_templates() (in module `awswrangler.quicksight`), 398

list\_user\_groups() (in module `awswrangler.quicksight`), 399  
list\_users() (in module `awswrangler.quicksight`), 399

**M**

max\_cache\_query\_inspections (awswrangler.typing.AthenaCacheSettings attribute), 406  
max\_cache\_seconds (awswrangler.typing.AthenaCacheSettings attribute), 406  
max\_local\_cache\_entries (awswrangler.typing.AthenaCacheSettings attribute), 406  
max\_remote\_cache\_entries (awswrangler.typing.AthenaCacheSettings attribute), 406  
merge\_datasets() (in module `awswrangler.s3`), 164

**O**

overwrite\_table\_parameters() (in module `awswrangler.catalog`), 245

**P**

parallelism (awswrangler.typing.RayReadParquetSettings attribute), 408  
parallelism (awswrangler.typing.RaySettings attribute), 408  
parameters (awswrangler.typing.GlueTableSettings attribute), 403  
partitioned\_by (awswrangler.typing.AthenaUNLOADSettings attribute), 405  
partitions\_values (awswrangler.typing.\_S3WriteDataReturnValue attribute), 409  
paths (awswrangler.typing.\_S3WriteDataReturnValue attribute), 409  
post\_message() (in module `awswrangler.chime`), 402  
projection\_digits (awswrangler.typing.AthenaPartitionProjectionSettings attribute), 407  
projection\_formats (awswrangler.typing.AthenaPartitionProjectionSettings attribute), 407  
projection\_intervals (awswrangler.typing.AthenaPartitionProjectionSettings attribute), 407  
projection\_ranges (awswrangler.typing.AthenaPartitionProjectionSettings attribute), 407

projection\_storage\_location\_template (awswrangler.typing.AthenaPartitionProjectionSettings attribute), 407  
projection\_types (awswrangler.typing.AthenaPartitionProjectionSettings attribute), 407  
projection\_values (awswrangler.typing.AthenaPartitionProjectionSettings attribute), 407  
put\_csv() (in module `awswrangler.dynamodb`), 344  
put\_df() (in module `awswrangler.dynamodb`), 345  
put\_items() (in module `awswrangler.dynamodb`), 346  
put\_json() (in module `awswrangler.dynamodb`), 347

**Q**

query() (in module `awswrangler.timestream`), 356

**R**

RayReadParquetSettings (class in `awswrangler.typing`), 408  
RaySettings (class in `awswrangler.typing`), 407  
RdsDataApi (class in `awswrangler.data_api.rds`), 321  
read\_csv() (in module `awswrangler.s3`), 165  
read\_deltalake() (in module `awswrangler.s3`), 168  
read\_excel() (in module `awswrangler.s3`), 169  
read\_fwf() (in module `awswrangler.s3`), 170  
read\_items() (in module `awswrangler.dynamodb`), 348  
read\_json() (in module `awswrangler.s3`), 173  
read\_logs() (in module `awswrangler.cloudwatch`), 370  
read\_parquet() (in module `awswrangler.s3`), 175  
read\_parquet\_metadata() (in module `awswrangler.s3`), 179  
read\_parquet\_table() (in module `awswrangler.s3`), 181  
read\_partiql\_query() (in module `awswrangler.dynamodb`), 352  
read\_sql\_query() (in module `awswrangler.athena`), 260  
read\_sql\_query() (in module `awswrangler.data_api.rds`), 322  
read\_sql\_query() (in module `awswrangler.data_api.redshift`), 321  
read\_sql\_query() (in module `awswrangler.lakeformation`), 276  
read\_sql\_query() (in module `awswrangler.mysql`), 305  
read\_sql\_query() (in module `awswrangler.oracle`), 315  
read\_sql\_query() (in module `awswrangler.postgresql`), 300  
read\_sql\_query() (in module `awswrangler.redshift`), 291  
read\_sql\_query() (in module `awswrangler.sqlserver`), 310

`read_sql_table()` (in module `awswrangler.athena`), 265  
`read_sql_table()` (in module `awswrangler.lakeformation`), 277  
`read_sql_table()` (in module `awswrangler.mysql`), 306  
`read_sql_table()` (in module `awswrangler.oracle`), 316  
`read_sql_table()` (in module `awswrangler.postgresql`), 301  
`read_sql_table()` (in module `awswrangler.redshift`), 292  
`read_sql_table()` (in module `awswrangler.sqlserver`), 311  
`RedshiftDataApi` (class in `awswrangler.data_api.redshift`), 319  
`regular_partitions` (`awswrangler.typing.GlueTableSettings` attribute), 404  
`repair_table()` (in module `awswrangler.athena`), 270  
`reset()` (`awswrangler.config` method), 409  
`run_query()` (in module `awswrangler.cloudwatch`), 371

**S**

`sanitize_column_name()` (in module `awswrangler.catalog`), 246  
`sanitize_dataframe_columns_names()` (in module `awswrangler.catalog`), 246  
`sanitize_table_name()` (in module `awswrangler.catalog`), 247  
`search()` (in module `awswrangler.opensearch`), 336  
`search_by_sql()` (in module `awswrangler.opensearch`), 337  
`search_tables()` (in module `awswrangler.catalog`), 248  
`select_query()` (in module `awswrangler.s3`), 184  
`size_objects()` (in module `awswrangler.s3`), 186  
`start_query()` (in module `awswrangler.cloudwatch`), 372  
`start_query_execution()` (in module `awswrangler.athena`), 271  
`start_transaction()` (in module `awswrangler.lakeformation`), 281  
`stop_query_execution()` (in module `awswrangler.athena`), 273  
`store_parquet_metadata()` (in module `awswrangler.s3`), 187  
`submit_ecr_credentials_refresh()` (in module `awswrangler.emr`), 367  
`submit_spark_step()` (in module `awswrangler.emr`), 367  
`submit_step()` (in module `awswrangler.emr`), 368  
`submit_steps()` (in module `awswrangler.emr`), 369

**T**

`table()` (in module `awswrangler.catalog`), 248  
`table_type` (`awswrangler.typing.GlueTableSettings` attribute), 403  
`tables()` (in module `awswrangler.catalog`), 249  
`temp_table_name` (`awswrangler.typing.AthenaCTASSettings` attribute), 404  
`terminate_cluster()` (in module `awswrangler.emr`), 369  
`to_csv()` (in module `awswrangler.s3`), 190  
`to_excel()` (in module `awswrangler.s3`), 197  
`to_json()` (in module `awswrangler.s3`), 198  
`to_pandas()` (`awswrangler.config` method), 409  
`to_parquet()` (in module `awswrangler.s3`), 203  
`to_property_graph()` (in module `awswrangler.neptune`), 340  
`to_rdf_graph()` (in module `awswrangler.neptune`), 341  
`to_sql()` (in module `awswrangler.mysql`), 308  
`to_sql()` (in module `awswrangler.oracle`), 318  
`to_sql()` (in module `awswrangler.postgresql`), 302  
`to_sql()` (in module `awswrangler.redshift`), 293  
`to_sql()` (in module `awswrangler.sqlserver`), 313  
`transaction_id` (`awswrangler.typing.GlueTableSettings` attribute), 403

**U**

`unload()` (in module `awswrangler.athena`), 273  
`unload()` (in module `awswrangler.redshift`), 295  
`unload_to_files()` (in module `awswrangler.redshift`), 297  
`update_ruleset()` (in module `awswrangler.data_quality`), 327  
`upload()` (in module `awswrangler.s3`), 210  
`upsert_table_parameters()` (in module `awswrangler.catalog`), 250

**W**

`wait_objects_exist()` (in module `awswrangler.s3`), 211  
`wait_objects_not_exist()` (in module `awswrangler.s3`), 212  
`wait_query()` (in module `awswrangler.athena`), 275  
`wait_query()` (in module `awswrangler.cloudwatch`), 372  
`wait_query()` (in module `awswrangler.lakeformation`), 282  
`write()` (in module `awswrangler.timestream`), 357